


Couplers

- screwless
- with screw terminals

4




Amp.	16	16	32	32	32
Poles	4	5	3	4	5
d	165-176	165-176	189-199	189-199	189-199
Øe	65	65	72	72	72
e1	35	35	38,5	38,5	38,5
f	77	85	91	91	97
m	114	114	130	130	130
Øp	7,5 - 18,5	7,5 - 18,5	10 - 22,5	10 - 22,5	10 - 22,5

Couplers, screwless,
with insulation displacement connection,
with exterior cable gland,
IP 44 ▲

Conductor cross sections:
16 A: 1 - 2,5 mm² / 32 A: 2,5 - 6 mm²

Cable diameters:
16 A: 7,5 - 18,5 mm / 32 A: 10 - 22,5 mm




Amp.	16	16	32	32	32
Poles	4	5	3	4	5
d	165-176	165-176	189-199	189-199	189-199
Øe	65	65	72	72	72
e1	35	35	38,5	38,5	38,5
f	77	85	91	91	97
m	114	114	130	130	130
Øp	7,5 - 18,5	7,5 - 18,5	10 - 22,5	10 - 22,5	10 - 22,5

Couplers, screw terminal connection,
with exterior cable gland,
IP 44 ▲


Conductor cross sections:
16 A: 1 - 2,5 mm² / 32 A: 2,5 - 6 mm²

Cable diameters:
16 A: 7,5 - 18,5 mm / 32 A: 10 - 22,5 mm




Amp.	63		
Poles	3	4	5
d	261	261	261
u	113	113	113
m	189	189	189
Øp	14-33	14-33	14-33

Couplers, screw terminal connection,
with exterior cable gland,
IP 44 ▲




Amp.	16	63		
Poles	3	3	4	5
d	154	266	266	266
Øe	51	96	96	96
f	68	114	114	114
m	109	196	196	196
Øp	7/13	15/33	15/33	15/33

Couplers, screw terminal connection,
with flexible cable entry,
IP 44 ▲



Amp.	16
Poles	3
d	121
Øe	51
f	68
m	108
Øp	8/15

Couplers, screw terminal connection,
with inverted cable entry,
IP 44 ▲

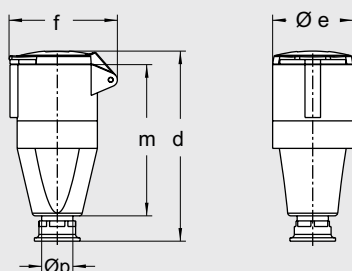

Amp.	16			32			63		
Poles	3	4	5	3	4	5	3	4	5
d	135	151	151	171	171	171	255	255	255
Øe	51	65	65	72	72	72	96	96	96
f	68	85	85	91	91	98	114	114	114
m	110	113	113	136	136	136	194	194	194
Øp	7,5-14,5	7,5-14,5	7,5-14,5	10-19,5	10-19,5	10-19,5	18-34,5	18-34,5	18-34,5

Couplers, screw terminal connection,
with trumpet gland,
IP 44 ▲

Ampère	Poles	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			> 50 - 500 V 100 - 300 Hz			> 50 - 500 V over 300 - 500 Hz			
		3pole 4h	4pole 4h	5pole 4h	3pole 6h	4pole 9h	5pole 9h	3pole 9h	4pole 6h	5pole 6h	3pole 7h	4pole 7h	5pole 7h	3pole 10h	4pole 10h	5pole 10h	3pole 2h	4pole 2h	5pole 2h	



2 P + E



3 P + E



3 P + N + E

Part numbers

16	4	310 404 SL	310 409 SL	310 406 SL	310 407 SL	310 410 SL	310 402 SL	10/60
16	5	310 504 SL	310 509 SL	310SL				10/60
32	3	330 304 SL	330 306 SL	330 309 SL				10/60
32	4	330 404 SL	330 409 SL	330 406 SL	330 407 SL	330 410 SL	330 402 SL	10/60
32	5	330 504 SL	330 509 SL	330 SL				10/60
16	4	310 404	310 409	310 406	310 407	310 410	310 402	10
16	5	310 504	310 509	310				10/60
32	3	330 304	330 306	330 309				10
32	4	330 404	330 409	330 406	330 407	330 410	330 402	10
32	5	330 504	330 509	330				10/60
63	3	362 304	362 306	362 309				5
63	4	362 404	362 409	362 406	362 407	362 410	362 402	5
63	5	362 504	362 509	362				5
63	5			362 Ni				5
16	3	310 304	310 306	310 309				10/60
63	3	360 304	360 306	360 309				5
63	4	360 404	360 409	360 406	360 407	360 410	360 402	5
63	5	360 504	360 509	360				5
63	5			360 Ni				5
16	3	315 304	315 306	315 309				10
16	3	311 304	311 306	311 309				10
16	4	311 404	311 409	311 406	311 407	311 410	311 402	10
16	5	311 504	311 509	311				10
16	5			311 Ni				10
32	3	331 304	331 306	331 309				10
32	4	331 404	331 409	331 406	331 407	331 410	331 402	10
32	5	331 504	331 509	331				10
32	5			331 Ni				10
63	3	361 304	361 306	361 309				5
63	4	361 404	361 409	361 406	361 407	361 410	361 402	5
63	5	361 504	361 509	361				5
63	5			361 Ni				5



330SL



330



362



360



315 306



331

The here listed 63A couplers are also available with **pilot contact**.

To order them, simply add a "P" behind the standard part number.

Availability of blue printed (or not listed) frequencies and voltages up to 690 V on request!