

REMOTE CONTROLS FOR COMFORTABLY CONTROLLING MOTION DETECTORS

B.E.G.

LUXOMAT® IR-RC




■ TECHNICAL DATA

- ~ Lithium CR2032 - 3 Volt (included) depending on lighting conditions
- ☀️ **clouded or dark:** 5 to 6 m;
sunshine: 2 to 3 m
- ↗️ L80 x W 60 x H 8 mm


► The LUXOMAT® IR-RC remote control may also be used for the RC-plus next 130/230/280 and RC-plus next 230 ZW motion detectors!

❗ PRODUCT INFORMATION

- Using the LUXOMAT® IR-RC infrared remote control, all settings can be made comfortably from the ground without having the annoyance of setting up ladders. It is suitable for use with the LUXOMATIC AL2-RC-plus outdoor lamps and the FL2-LED-230 and AL5-RC-plus next outdoor floodlights.
- The great variety of programs facilitates adapting the motion detector to all individual wishes at any time – even subsequently.
- Additional features like automatically reading-in the current daylight value or the useful 2 sec.-test function are also optionally available with the IR-RC.
- The lights can be switched on or off anytime with just a touch of the button. That means it is not necessary to install an additional light switch.
- Comes complete with a practical wall bracket (dimensions (approx.): 63 x 29 x 19 mm).



■ PROGRAM FUNCTIONS

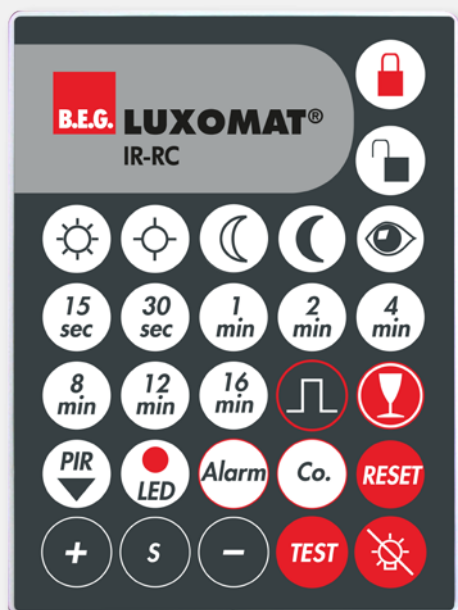

☀️	Preselected light value - Daylight operation	🔒 🔓	Programmable Opening and closing also with parental lock and security against sabotage after setting up
☀️	Preselected light value - approx. 100 Lux = started dawn	👁️	Automatic reading and saving of the actual light level
🌙	Preselected light value - approx. 25 Lux = advanced dawn	🚫	Party program - Constant light for 12 hours or light off
🌙	Preselected light value - Operation at night	🔄	Reset - Resetting of all functions
15 sec to 16 min	8 preselected switch on times from 15 s to 16 Min	🕒	Vacation- and comfort function Automatically switching on at dusk
Alarm	Alarm function Blinking of the connected lighting after detected motion	TEST	Test operation The surveyed room can be paced out independent of surrounding brightness and can be aligned easily after that.
LED	LED-Button Activate and deactivate the walking test LED	🔊	Impulse function Send of a short impulse of approx. 1 s, for example to activate a door gong.
PIR	Activate and deactivate of the 360°- anti-creep	🚫	Light OFF Followed by two seconds without motion detection: allows leaving out of the detecting range
+ S -	Electronic sensitivity control Increase and decrease of the detector range		

Description

LUXOMAT® IR-RC

Colour

grey

Part number

92000



REMOTE CONTROLS