




[◀ Back to Search results for "AFP711" \(8 other results\)](#)

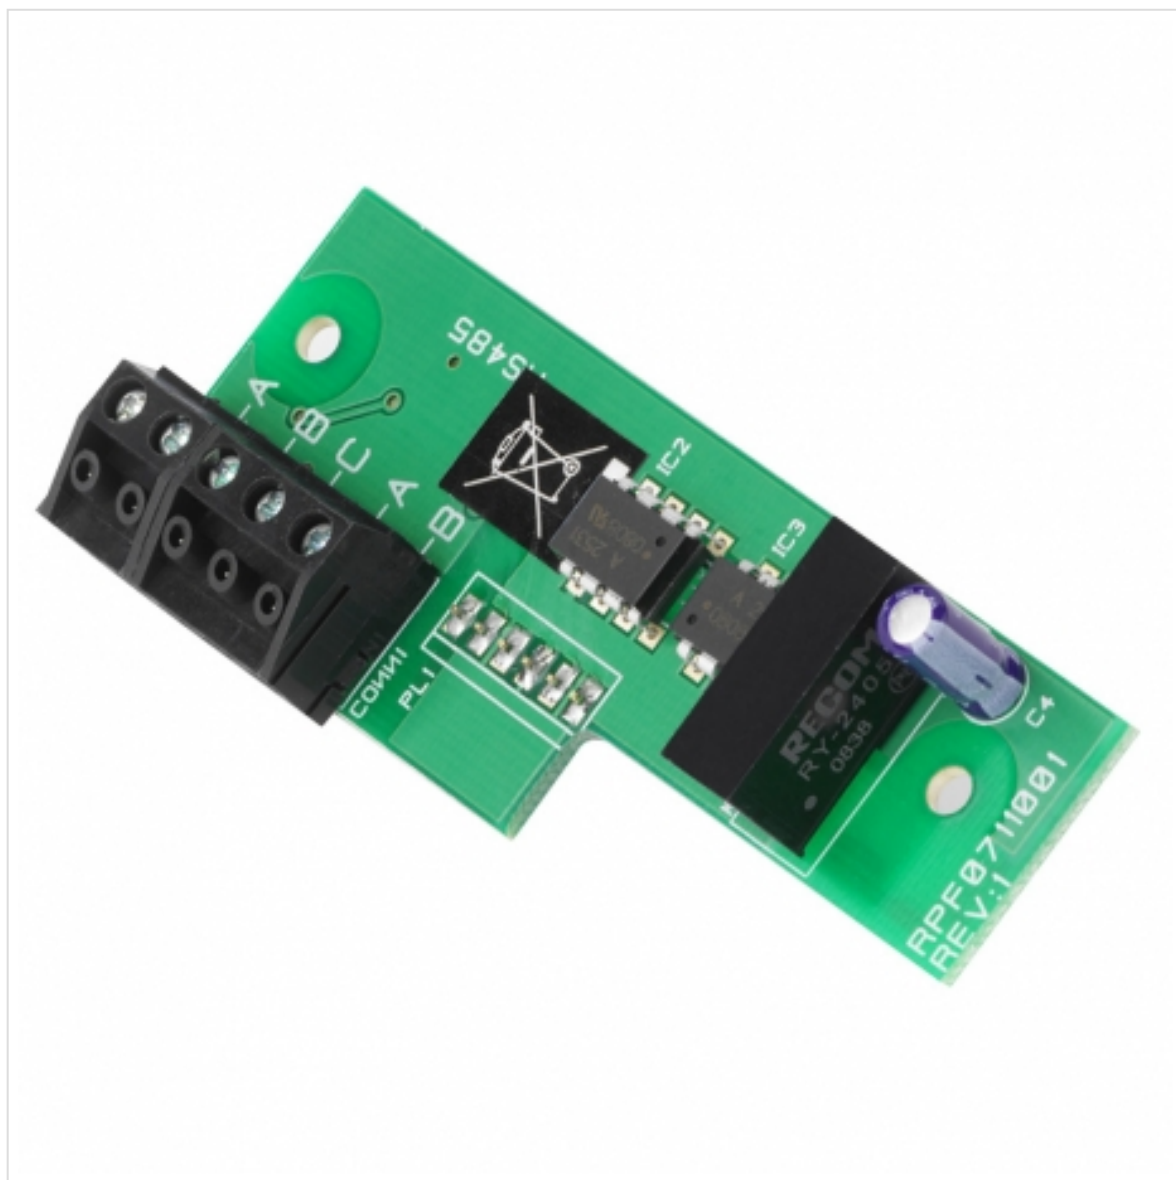

XFP Network Driver Card

Part No. AFP711

- An optional system expansion device for use with XFP 1/2 Loop 32 Zone fire panels.
- Allows the connection of up to eight XFP Repeaters or eight XFP Main panels (any mix) on an RS485 network.
- One **AFP711** card required per networked Main XFP 1/2 Loop 32 Zone panel (note that XFP510-16 and XFP510-32 repeaters include a network driver card as standard).
- The **AFP711** is NOT compatible with XFP Single Loop 16 Zone panels which require a CFP761 card for networking.

More Information



Key network protocol features when used for interconnecting XFP main panels:

Can be used to connect up to 8 XFP main panels (any mix) over a two-wire RS485 network of up to 1KM in length. Each networked XFP can be programmed to accept Fires, Faults and Control actions such as Silence Alarm Sounders and Control Panel Resets from other panels.

Each XFP will accept Disablement commands for zones, sounders and output sets from other panels.

All panels monitored for network wiring faults.

Fires and faults on remote panels are displayed on local panels including the point description.

C&Es can be programmed into local panels dependent on which remote panel is in alarm.

The network supports the programming of site data into remote panels from a PC at a local panel.

Time and date is common to all panels.

All networked main panels require a network communication card.

It is not possible to mix XFP main panels and XFP repeaters on the same network.

Key network protocol features when used for connecting XFP repeaters

Can be used to connect up to 8 XFP repeaters (any mix) to one XFP main panel.

Up to 500m of cable may be fitted to an XFP two-wire repeater network.

Each XFP repeater offers all the functions and controls of an XFP main panel.

The XFP main panel must have a network communication card fitted.

It is not possible to mix XFP main panels and XFP repeaters on the same network.

Technical Specifications



Product dimensions (mm)	31 W x 80 H x 22 D mm.
Weight	16g.

Dimensions & Mounting Information



Product dimensions:	TBC W x TBC H x TBC D mm.
Location:	Mounts inside an XFP 1/2 Loop 32 Zone Panel.

Accessories





**XFP 1 Loop 32 Zone
Addressable Fire Panel
(Hoch...**



**XFP 2 Loop 32 Zone
Addressable Fire Panel
(Hoch...**



**XFP 1 Loop 32 Zone
Addressable Fire Panel
(XP95...**



**XFP 2 Loop 32 Zone
Addressable Fire Panel
(XP95...**

10 other products in the same category:



**XFP 1 Loop 16 Zone
Addressable Fire Panel...**




**XFP 1 Loop 32 Zone
Addressable Fire Panel...**



**XFP 2 Loop 32 Zone
Addressable Fire Panel...**



CFP/XFP Network Driver Card

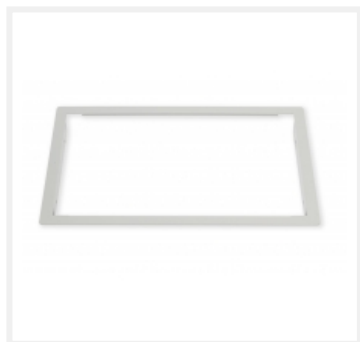

**Flush Mounting Bezel for XFP
32 Zone Masters &...**

XFP 16 Zone Repeater Panel (all protocols)



**Glazed Stainless Steel
Enclosure, shallow**

XFP 32 Zone Repeater Panel (all protocols)



**XFP Upload/Download
Programming Tools**



Red Plastic Fire Panel Key

CONTACT US

 C-TEC , Challenge Way, Wigan, WN5 0LD, UK Opening times: 08:30 - 17:00 GMT.

 **+44 (0) 1942 322744**

 sales@c-tec.co.uk
