

Main switchFlush mounting

Powering Business Worldwide™

Part no. P3-63/EA/SVB Article no. 031607

Front IP65

| Delivery programme | | | |
|-----------------------------|----------------|-----|---|
| Product range | | | Switch-disconnectors |
| Basic function | | | Main switches Maintenance switches Manual override switches |
| Part group reference | | | P3 |
| Design | | | Flush mounting |
| | | | |
| Protection type | | | Front IP65 |
| Emergency stop | | | As an emergency switching off/emergency stop device |
| | | | With red rotary handle and yellow locking ring |
| Standards | | | According to IEC/EN 60204-1, VDE 0113 Part 1 |
| Locking facility | | | Lockable in the 0 (Off) position |
| | | | without auxiliary contacts |
| Contact sequence | | | 0 |
| Front plate no. | | | FS 908 |
| Main conducting paths | | | |
| No. of poles | | М | 3 |
| Auxiliary contacts | | | |
| | | N/0 | 0 |
| | | В | 0 |
| Max. motor rating | | | |
| AC-23A | | | |
| 400/415 V 50-60 Hz | | | |
| 400 V | Р | kW | 30 |
| Rated uninterrupted current | l _u | Α | 63 |

Approvals
Product Standards
UL File No.
UL CCN CSA File No. CSA Class No. NA Certification Suitable for Degree of Protection

UL 508; CSA-C22.2 No. 14-05; IEC/EN 60947-3; CE marking E36332 $\ensuremath{\mathsf{NLRV}}$

12528 3211-05

UL listed, CSA certified

Branch circuits, suitable as motor disconnect IEC: IP65; UL/CSA Type 3R, 12

| General | | | |
|---|---------------------------------------|----------------------|--|
| Standards | | | IEC/EN 60 947, VDE 0660, IEC/EN 60 204, CSA,UL Switch-disconnectors to IEC/EN 60 947-3 NEMA3R, NEMA12, NEMA13 |
| Lifespan, mechanical | Operations | x 10 ⁶ | 0.1 |
| Maximum operating frequency | | Operati | ion s 70 |
| Climatic proofing | | h | Damp heat, constant, to IEC 60068-2-78; Damp heat, cyclical, to IEC |
| Ambient temperature | | °C | 60068-2-30 |
| Open | | °C | - 25 - 50 |
| Enclosed | | °C | - 25 - 40 |
| Mounting position | | | As required |
| Mechanical shock resistance to IEC 60068-2-27 | Half- sinusoidal shock 20 ms | g | > 15 |
| Contacts | | | |
| Rated operational voltage | U _e | V AC | 690 |
| Rated impulse withstand voltage | U _{imp} | ٧ | 6000 |
| Overvoltage category/pollution degree | | AC | III/3 |
| Overvoltage category/pollution degree | l _u | Α | IIIJO |
| open | I _U | A | 63 |
| Enclosed | l _u | A | 63 |
| Load rating with intermittent operation, class 12 | 'u | ^ | |
| AB 25 % DF | | x l _e | 2 |
| AB 40 % DF | | x l _e | 1.6 |
| AB 60 % DF | | x l _e | 1.3 |
| Short-circuit rating | | X ie | |
| Fuse | | A gG/ gL | 80 |
| Rated short-time withstand current (1 s current) | I _{cw} | A _{rms} | 1260 |
| Switching angles | | 0 | 90 |
| Current heat loss per contact at l _e | | W | 4.5 |
| Terminal capacities | | | |
| Solid or stranded | | mm ² | 1 x (2.5 - 35) 2 x (2.5 - 10) |
| Flexible with ferrules to DIN 46228 | | mm^2 | |
| Flexible with ferrule | | mm ² | 1 x (1.5 - 25) 2 x (1.5 - 6) |
| Terminal screw | | | M5 |
| lightening torque | | Nm | 3 |
| Switching capacity | | | |
| AC | | x U _s | |
| Rated making capacity $\cos \phi = 0.35$ | | A | 800 |
| Rated breaking capacity, motor load switch $\cos \phi = 0.35$ | | A | 640 |
| 400 V | | A A | 600 |
| 500 V | | A | 590 |
| 690 V | | A | 340 |
| Rated operational current 440 V load-break switch AC-21A | l _e | Α | 63 |
| Rating, AC-3 motor load switch | P | kW | |
| 220 V 230 V | Р | kW | 15 |
| 380 V 400 V | Р | kW | 30 |
| 500 V | Р | kW | 30 |
| 660 V 690 V | Р | kW | 20 |

| 230 V | AC-23A Motor load switches (main switches maintenance switches) | Р | kW |
|--|---|----------------|------------------|
| A00 V P | | | |
| F | 230 V | Р | kW 18.5 |
| DC | 400 V | Р | kW 30 |
| DC x Us x Us DC-1, Load-break switches L/R = 1 ms Ie A 63 Rated operational current Voltage per contact pair in series V 60 DC-23A, motor load switch L/R = 15 ms V 50 24 V A 50 Rated operational current Ie A 50 Contacts Quantity 1 Rated operational current Ie A 50 Contacts Quantity 2 60 V United to the contacts Quantity 2 Rated operational current Ie A 50 Contacts Quantity 2 Contacts Quantity 3 Rated operational current Ie A 50 | 500 V | Р | kW 37 |
| DC-1, Load-break switches L/R = 1 ms Rated operational current Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Contacts Rated operational current | 690 V | Р | kW 50 |
| Rated operational current Voltage per contact pair in series DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Rated operational current Velue | DC | | x U _s |
| Voltage per contact pair in series V 60 DC-23A, motor load switch L/R = 15 ms V Feated operational current V V Rated operational current Ie A 50 Contacts Quantity 1 Rated operational current Ie A 50 Contacts Quantity 2 60 V Quantity 2 Rated operational current Ie A 50 Contacts Quantity 3 120 V Quantity 3 Rated operational current Ie A 25 | DC-1, Load-break switches L/R = 1 ms | | |
| DC-23A, motor load switch L/R = 15 ms 24 V Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts Contacts Quantity 2 GOV Rated operational current Ie A 50 Contacts Quantity 2 Contacts Quantity 2 Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts Rated operational current Ie A 50 Contacts Quantity 3 | Rated operational current | l _e | A 63 |
| 24 V Ie A 50 Contacts Quantity 1 48 V Ie A 50 Rated operational current Ie A 50 Contacts Quantity 2 60 V Quantity 2 Rated operational current Ie A 50 Contacts Quantity 3 120 V Rated operational current Ie A 25 | Voltage per contact pair in series | | V 60 |
| Rated operational current Contacts Quantity 1 Rated operational current Rated operational current Contacts Contacts Rated operational current | DC-23A, motor load switch L/R = 15 ms | | |
| Contacts 48 V Rated operational current Contacts Contacts Rated operational current Rated operational current Rated operational current Rated operational current Ie A 50 Cuantity 2 Contacts Quantity 3 120 V Rated operational current Ie A 25 | 24 V | | |
| A8 V Rated operational current Contacts Rated operational current Rated operational current Ie A 50 Quantity 2 GOV Rated operational current Ie A 50 Quantity 3 120 V Rated operational current Ie A 25 | Rated operational current | l _e | A 50 |
| Rated operational current Contacts Guantity Rated operational current Ie A 50 Cuantity A 50 Cuantity A 50 Cuantity A 50 Cuantity A 50 Contacts Quantity A 50 Contacts A 50 Cuantity A 50 C | Contacts | | Quantity 1 |
| Contacts Guantity Quantity Quantity Quantity Quantity A 50 Contacts Quantity Quantity A 50 Quantity A 50 Quantity 3 120 V Rated operational current I _e A 25 | 48 V | | |
| Rated operational current Ie A 50 Contacts Quantity 3 120 V Rated operational current Ie A 25 | Rated operational current | l _e | A 50 |
| Rated operational current Contacts 1e Quantity 3 120 V Rated operational current 1e A 25 | Contacts | | Quantity 2 |
| Contacts Quantity 3 120 V Rated operational current I _e A 25 | 60 V | | |
| 120 V Rated operational current | Rated operational current | l _e | A 50 |
| Rated operational current I _e A 25 | Contacts | | Quantity 3 |
| | 120 V | | |
| Contacts Quantity 3 | Rated operational current | I _e | A 25 |
| | Contacts | | Quantity 3 |

Auxiliary contacts

| Standards | According to IEC/EN 60204-1, VDE 0113 Part 1 |
|-----------|--|
|-----------|--|

Notes


Notes Main switch characteristics to IEC/EN 60204; positive opening of contacts, operator element positively located on shaft The rated uninterrupted current I_u is stated at max. connected cross-section.

For terminal capacity solid, stranded and flexible: Max. 2 cross-section sizes difference admissible when using 2 conductors.

Technical data ETIM 4.0


| | 0 |
|-----|------------------|
| | 0 |
| Α | 63 |
| | 3 |
| kA | 0 |
| | IP55 |
| | 0 |
| | YES |
| | No |
| | Screw connection |
| | YES |
| | - |
| | YES |
| | YES |
| | No |
| | YES |
| kWh | 37 |
| kWh | 30 |
| | No |
| V | 690 |
| | No |
| | kWh kWh |


Characteristics

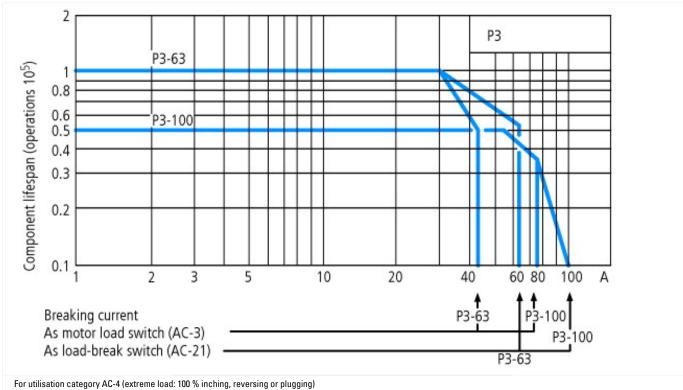

For utilisation category AC-4 (extreme load: 100 % inching, reversing or plugging)
The blocked rotor current of the motor should not exceed the rated current of the switch for AC-21A to ensure a reasonable device lifespan.

Dimensions

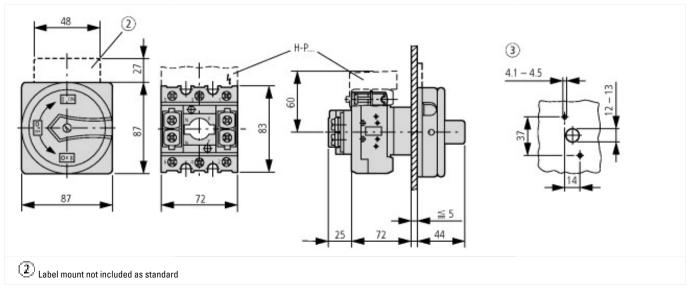

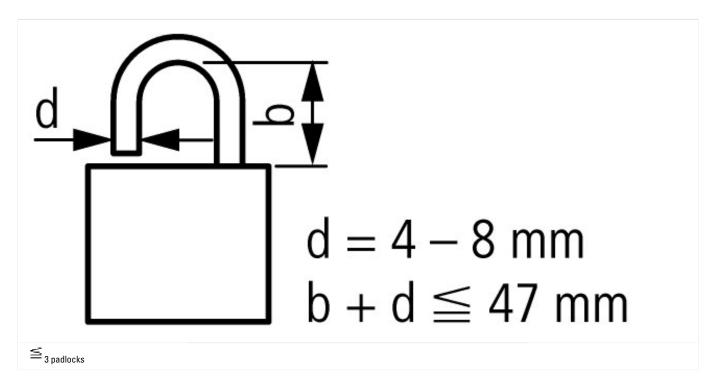

Additional product information (links)

IL03802002Z (AWA1150-1690) Switch-Disconnectors for flush mounting

IL03802002Z (AWA1150-1690) Switch-Disconnectors for flush mounting $ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03802002Z2011_06.pdf in the contraction of the cont$

http://ecat.moeller.net/flip-cat/?edition=HPLEN&startpage=4.87