

## STARSPOT™ 600

### JC14222

#### TRACK SPOTLIGHT

Light source: Integral LED  
Total circuit Wattage: 7.5W  
Beam angle: 36°  
Luminous flux: 550 lumens  
Efficacy: 73 LpcW  
Colour temp: 3000K  
Ra: 85

### JC14223

#### TRACK SPOTLIGHT

Light source: Integral LED  
Total circuit Wattage: 7.5W  
Beam angle: 36°  
Luminous flux: 700 lumens  
Efficacy: 93 LpcW  
Colour temp: 4000K  
Ra: 85

**Available finishes: black or white**

240V~50/60Hz / Class I

CE RoHS Compliant 0.3m IP20

BS EN ISO9001 - 2008  
Registered Firm Certificate No. GB 1552  
Drg No. JC14222-IS Issue: B - 12.09.16 - KB

## Installation Sheet

Please read these instructions before  
installation and retain for future reference

### Important Information

- It is recommended that luminaires are installed and fitted by a qualified electrician ensuring the installation complies with current IEE wiring regulations BS7671:2008 & local building control.
- These products are designed for connection to a 240V 50/60Hz supply.
- Any broken or damaged parts should be replaced as soon as possible.
- JCC will not accept responsibility for any claims arising from a poor installation.
- The light source of this luminaire is not replaceable: when the light source reaches its end of life, the whole of the luminaire must be replaced. The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- The light source must be a minimum distance of 0.3m from a lit object.

### Important User Advice



- It is recommended that the ambient room temperature should not exceed 30°C.
- Ensure that there is adequate free air ventilation around the fitting.
- The installation must not infringe on water pipes or any other electrical services.
- It may be necessary to uprate your MCBs to allow for increased inrush current.
- Always switch off mains supply before fitting or servicing.
- This luminaire is suitable for indoor use only.

### Installation


It is recommended that this product is used in conjunction with the JCC Mains Track System. The installation must not infringe on water pipes or any other electrical services. Locate fitting in track and rotate anti-clockwise, ensuring "P" polarity symbol is aligned correctly with track polarity. Observe minimum distance from nearest illuminated surface. Once installed, turn on mains supply to test the luminaire.

**Note:** adjustment to the beam direction while the luminaire is operational should be carried out with care as it can get hot during service. **DO NOT** carry out insulation tests with the Luminaire connected to the circuit. There are no serviceable parts. If any of the components fail or become faulty, please contact JCC Technical Support for assistance.

**jcc.co.uk**



## Profile & Dimensions

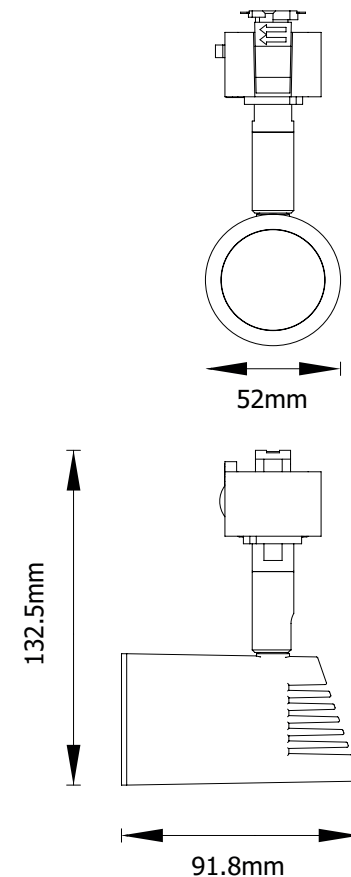

All dimensions in millimetres