definity™ COMPLETE

Technical Specification

CLICK® Scolmore GROUP

Product Code: SFPW100PW

Luckinslive 435280806

Description: 115V/230V Dual Voltage Shaver Socket Outlet

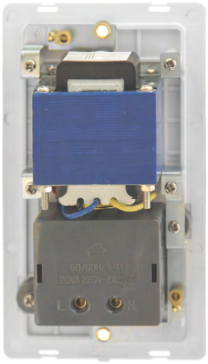

General Information

Insert Dimensions (mm)	82.5 (W) x 142.5 (H) x 2.5 (D)		
Plate Dimensions (mm)	86 (W) x 1466 (H) x 4 (D)		
Plate Fixing Centres - Vertical (mm)	120.6		
Style	Screwless Complete		
Colour	Polar White		
Insert Colour	Polar White		
Compatible Cover Plate	SCP100#		
Materials	Cover Plate: Polycarbonate	Insert: Polycarbonate	
	Rear Housing: Urea	Terminals: Brass	
	Terminal Screws: Steel & Yellow Passivated	Contacts: Silver "on-lay" Copper / Brass	
	Internal Busbars: Formed Pressed Brass	Earth Strap: Mild Steel	
Anti Microbial Certified	No		
Operating Voltage (AC)	220-240	Frequency (Hz)	50/60
Load Rating @115V (Va)	20		
Load Rating @230V (Va)	20		
Thermal Protection Device	PTC Resettable Fuse		
Termination Type	Screw		
Terminal Size (mm)	Ø3.5	Terminal Torque Value (Nm)	0.5
Terminal Capacity - Solid (mm^2)	2 x 1.5 or 1 x 2.5		
Socket Features	Safety Interlock Shutter		
Twin Earth Terminals	Yes		
Product Marking	Shavers Only, 230V~, 115V~		
Minimum Back Box Depth (mm)	47		
Ingress Protection	IP20		
Operational Temperature (°C)	-5 to +40		
Warranty (Years)	20	Warranty - Electronics (Years)	2

Standards BS EN IEC 61558-1, BS EN 61558-2-5

Additional Information

For cleaning / polishing of products, use only a soft, dry, clean cloth.
This outlet is not continuously rated and therefore not suitable for use as a permanent charging outlet.
CLICK dual voltage shaver outlets incorporate a double wound isolating transformer rated 20Va at 230V or 115V and meets BS EN 61558-2-5:2010 making it safe for use in bathrooms.
PTC resettable fuses increase resistance as temperature increases due to increased flow. PTC resettable fuses are designed to limit unsafe currents while allowing constant safe current levels, resistance will "reset" automatically when the fault is removed and temperature returns to a safe level.
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram with the relevant product.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.

Scolmore House, Mariner, Lichfield Road Industrial Estate,
Tamworth, Staffordshire, B79 7UL United Kingdom
T: +44 (0)1827 63454 | **F:** +44 (0)1827 63362
E: sales@scolmore.com | **W:** scolmore.com

CE UKCA

Catalogue Range DoC Installation