

WAVESERIES WAS4 PRO DC/DC

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com



The configurable WAS4/WAZ4 PRO DC/DC: a U/I-DC-signal isolating converter with external power supply in 12.5 mm width, for transmitting and isolating analogue DC current signals ($\pm 0.1 \dots \pm 100$ mA) and voltage signals (± 20 mV... ± 200 V).

Up to 440 fixed input and output parameters can be configured using the DIP switches and potentiometer (span/offset). The input/output channels and power supply are completely isolated with 4 kV.

Because of its 20...253 VAC/DC wide-range power supply, the PRO DC can be used in many applications regardless of its position.

The signal isolating converter features an adjustable transmission frequency (10 Hz/10 kHz), low power dissipation, and a wide temperature range (-10 °C to $+70$ °C).

The WAVETOOL software can be used as a universal setting aid. The WAVETOOL software found at www.weidmueller.com can be used for configuration. The PRO DC is optionally available with screw or tension-clamp wire connections. The signal isolating converter has international approvals (cULus, cULusEX, ATEX Zone2, GL) which enable it to be used worldwide for many explosive-risk applications.

General ordering data

Type	WAS4 PRO DC/DC
Order No.	8560740000
Version	Signal converter/disconnector
GTIN (EAN)	4032248207350
Qty.	1 pc(s).

WAVESERIES WAS4 PRO DC/DC

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 14-0
 Fax: +49 5231 14-292083
 www.weidmueller.com

Technical data

Dimensions and weights

Length	92.4 mm	Width	12.5 mm
Depth	112.4 mm	Net weight	132.2 g

Temperatures

Operating temperature	-10 °C...+70 °C	Storage temperature	-40 °C...+85 °C
-----------------------	-----------------	---------------------	-----------------

Probability of failure

MTTF	76 Years
------	----------

Input

Supply voltage	22...230 V AC/DC +10 %	Input current	± 0.1mA...± 100 mA
Number of inputs	1	Input resistance, voltage	approx. 1 MΩ
Input resistance, current	< 5 mA: approx. 100 Ω; >5 mA: approx. 5 Ω	Input voltage	± 20 mV...± 200 V

Output

Adjustment range, zero point	± 25 % of the measuring span of selected output range	Adjustment range, amplification	0.33...3.30 x end value of selected output range
Cut-off frequency (-3 dB)	> 10 kHz/ < 10 Hz	load impedance voltage	≥ 1 kΩ
Number of outputs	1	load impedance current	≤ 600 Ω
Offset voltage	10 mV	Offset current	20 µA
Status indicator	Green LED	Displacement	-100%, -50%, 0%, 50%, 100% of measuring span
Output voltage, note	0...±10 V	Output current	0...±20 mA

General data

Accuracy	< 0.2 %	Galvanic isolation	3-way isolator
Input/Output	configurable	Mounting rail	TS 35
Power consumption	ca. 1 W	Step response time	120 ms (10...90 %)
Supply voltage	22...230 V AC/DC +10 %	Temperature coefficient	≤ 60 ppm/K of final value

Insulation coordination

EMC standards	DIN EN 61326, EN 61000-6 /-2, EN 61709 (SN 29500) MTBF	Galvanic isolation	3-way isolator
Impulse withstand voltage	5 kV, 1.2/50 µs (IEC 255-4)	Insulation voltage	4 kV _{eff}
Insulation voltage input or output/rail	4 kV _{eff}	Insulation voltage input or output/supply	4 kV _{eff}
Pollution severity	2	Rated voltage	600 V
Standards	DIN EN 50178, DIN EN 61000-4-2	Surge voltage category	III

Classifications


ETIM 3.0	EC001774	eClass 6.2	27-21-01-20
eClass 7.1	27-21-01-20		

**WAVESERIES
WAS4 PRO DC/DC**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 14-0
Fax: +49 5231 14-292083
www.weidmueller.com

Technical data**Approvals**

Approvals

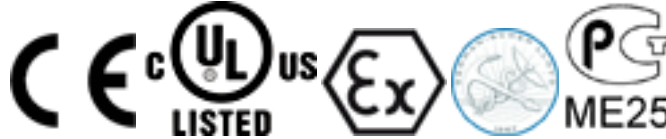

ROHS

Conform

Downloads

Package insert	instruction sheet.pdf
Software	WaveTool.zip
Declaration of Conformity	Declaration of Conformity.pdf
EPLAN	8560740000.ema
3-D model	

WAVESERIES
WAS4 PRO DC/DC
Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 16

D-32758 Detmold

Germany

Fon: +49 5231 14-0

Fax: +49 5231 14-292083

www.weidmueller.com

Drawings
Electric symbol
