


SHARK 535Y

SHARK Y Branch

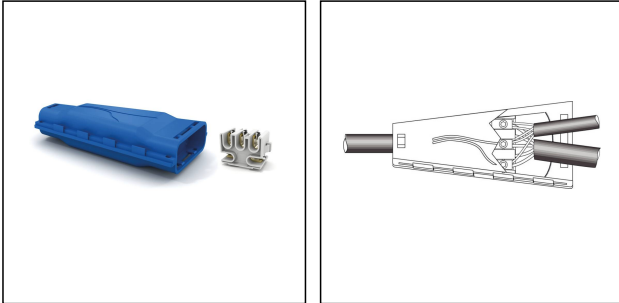

Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

Material	Polyamide
Filling	Silicone
Temp. range min	-20 °C
Temp. range max	90 °C
Glow wire test	self-extinguishing
Voltage	0,6 kV - 1 kV
Terminals/poles	max. 35 mm²
Quantity of cable	2 - 5
Order no. UK	SH6535
Type	SHARK 535Y
Packing unit	1
ETIM-Classification	EC001169

Remarks:

Cable Size: Main Cable 6 - 50 mm Branch cable 1.5 -25 mm

LxBxH: 260x130x65 mm

Description:

SHARK Y BRANCH Pre-filled gel insulated Y joint for branch connection.

Additional Info:

Ready to use, re-enterable, no mixing or pouring, immediate operation, excellent electrical insulation, good mechanical strenght, no expiry date.

24.04.2018

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

