


SHARK 150Y

SHARK Y Branch

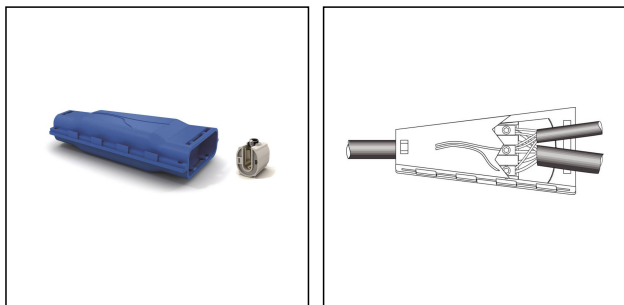

Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

Material	Polyamide
Filling	Silicone
Temp. range min	-20 °C
Temp. range max	90 °C
Glow wire test	self-extinguishing
Voltage	0,6 kV - 1 kV
Terminals/poles	max. 1x50 mm ²
Quantity of cable	1
Order no. UK	SH6150
Type	SHARK 150Y
Packing unit	1
ETIM-Classification	EC001169

Remarks:

Cable Size: Main Cable 6 - 50 mm Branch cable 1.5 -25 mm

LxBxH: 145x70x32 mm

Description:

SHARK Y BRANCH Pre-filled gel insulated Y joint for branch connection.

Additional Info:

Ready to use, re-enterable, no mixing or pouring, immediate operation, excellent electrical insulation, good mechanical strenght, no expiry date.

24.04.2018

