


SHARK 425/S

SHARK T Branch

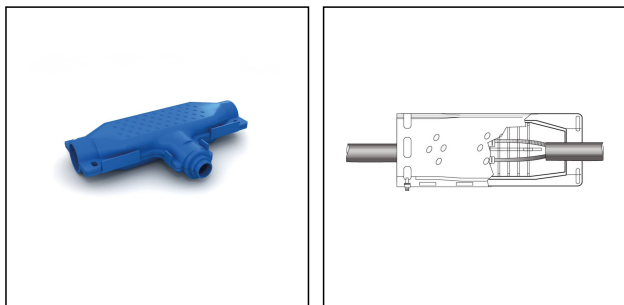

Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

Material	Polyamide
Filling	Silicone
Temp. range min	-20 °C
Temp. range max	90 °C
Glow wire test	self-extinguishing
Voltage	0,6 kV - 1 kV
Quantity of cable	1
Order no. UK	SH1425
Type	SHARK 425/S
Packing unit	1
ETIM-Classification	EC001169

Remarks:

Cable Size: Main Cable up to 150 mm Branch cable up to 50 mm

LxBxH: 210x125x49 mm

Description:

SHARK T BRANCH Pre-filled gel insulated T joint for branch connection.

Additional Info:

Ready to use, re-enterable, no mixing or pouring, immediate operation, excellent electrical insulation, good mechanical strenght, no expiry date.

24.04.2018

