

Specification Notes



The 3 pin operated safety shutter makes Logic Plus™ sockets the safest available




Many sockets are fitted with two earth terminals to provide high integrity earthing



Terminals are grouped in-line with terminal screws backed out ready for easy wiring. Clear marking on dark background makes the terminals easily identifiable

Switchsocket Outlets

13 AMP
FLUSH

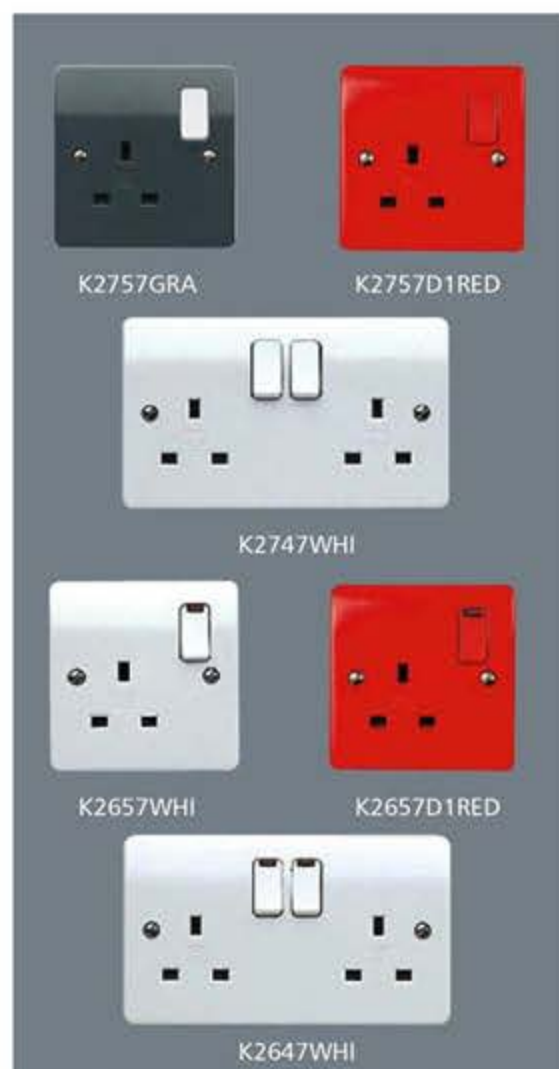

K2757WHI	10
K2757GRA	10
1 GANG DP WITH DUAL EARTH TERMINALS	
K2757D1RED	5
1 GANG DP WITH RED FRONTPLATE, RED ROCKER AND DUAL EARTH TERMINALS	
K2747WHI	50
2 GANG DP	
K2657WHI	10
K2657GRA	10
1 GANG DP WITH NEON AND DUAL EARTH TERMINALS	
K2657D1RED	5
1 GANG DP WITH RED FRONTPLATE, RED ROCKER, NEON AND DUAL EARTH TERMINALS	
K2647WHI	5
2 GANG DP WITH NEONS	
MOUNTING BOXES:	
FLUSH 25mm	3 GANG: K2153WHI
1 GANG: 861ZIC	DIMENSIONS:
2 GANG: 862ZIC	1 GANG: 86 x 86mm
FLUSH 35mm	2 GANG: 86 x 146mm
(for extra wiring space)	3 GANG: 86 x 206mm
1 GANG: 866ZIC	FIXING CENTRES:
2 GANG: 886ZIC	1 GANG: 60.3mm
3 GANG: K863	2 GANG: 120.6mm
SURFACE	3 GANG: 180.9mm
1 GANG: K2140WHI	BS 1363 Pt 2: 1995
2 GANG: K2142WHI	

WITH OUTBOARD
ROCKERS
13 AMP
FLUSH



K2757D1WHI	10
1 GANG DP WITH RED ROCKER AND DUAL EARTH TERMINALS	
K2757D2WHI	10
1 GANG DP WITH GREEN ROCKER AND DUAL EARTH TERMINALS	
K2747D1WHI	5
2 GANG DP WITH RED ROCKERS	
K2747D1RED	5
2 GANG DP WITH RED FRONTPLATE AND RED ROCKERS	
K2737WHI	5
3 GANG DP WITH DUAL EARTH TERMINALS	
K2746WHI	10
K2746GRA	10
2 GANG DP WITH OUTBOARD ROCKERS AND DUAL EARTH TERMINALS	
K2746CEWHI	10
2 GANG DP WITH OUTBOARD ROCKERS AND 'CLEAN EARTH' FACILITY	
K2476WHI	10
K2476GRA	10
2 GANG DP WITH OUTBOARD ROCKERS DUAL EARTH AND NEONS	
K2476CEWHI	10
2 GANG DP WITH OUTBOARD ROCKERS, NEONS AND 'CLEAN EARTH' FACILITY	

High integrity earthing
K2757, K2657 and K2737
are fitted with two earth terminals to
provide a double earth facility for use when
installations require a high integrity protective
connection as specified within BS 7671: 2008.
K2737
13A fuse protects all three outlets

K2746CE is provided with facility for
'clean earth' connection.
DIMENSIONS:
86 x 146mm
FIXING CENTRES:
120.6mm
BS 1363 Pt 2: 1995