

BASIC		V		$\overline{\mathbb{Y}}$	<sup>א א</sup> א א א	DELAY Start	CV
SWITCHING	PULLCORD	TIMER	HUMIDITY	MOTION	TWO SPEED	2 MINS	VENTILATION

## Key Features

- Axial fan
- Flow rate up to 68 m<sup>3</sup>/hr
- Stylish, slim and unobtrusive in walls or ceilings
- Low SFP 0.49 W/l/s
- Different colour covers available
- Unique iris shutter, prevents backdraughts, operates silently
- Interchangeable control modules match fan to installation requirements
- IPX4 rating
- Complies with Building Regulations
- 3 year warranty

# **iCON 15**

iCON 15 is ideal for toilets, en-suites, shower rooms and bathrooms. Recessed into the wall or ceiling, it is stylish and unobtrusive, even in the smallest of spaces. The circular design means no squaring up is required, adding to the already simple installation procedure.

iCON 15 is designed to provide ventilation levels that comply with the latest Building Regulations. The iCON fan is an efficient, stylish and unique ventilation solution for the modern home. The shutter design makes switching on and off almost silent and helps reduce external noise ingress.

The slim profile and iris shutter of the iCON make it a fan which will blend discreetly into any setting. Two iCON 15 shower kits including (Timer / Humidity Timer) module and ducting installation kits are avilable.






#### Modules

See page 72 for module functionality					
72573602	Pull Cord	ull Cord			
72612601	Timer				
72687103	Humidity, Pull Cord with Timer overrun				
72687104	Motion Sensor with Timer overrun				
72687102	Motion Sensor Humidity Timer				
72675701	Continuous Ventilation at 8/13 l/sec				
72675702	Delayed Timer with Pull Cord				
72675703	2 Speed Humidity Pull Cord boost				

### **Technical Data**

Specification	iCON 15		
Air flow m <sup>3</sup> /hr / l/sec	68 / 19		
Fan type	Axial		
Mounting	Wall / Ceiling		
Sound pressure dB(A)@3m	30.3		
Power watts	8.8		
Specific Fan Power (SFP)	0.49		
Building Regulations ADF	Yes		
Duct diameter (mm)	100		
Voltage	230/1/50Hz		
Rating	IPX4		
Max ambient temperature	40°C		
Weight (kg)	0.74		
Dimensions (H x W x D) mm	197 x 197 x 40		
Part No.	72683501		

## Dimensions (mm)

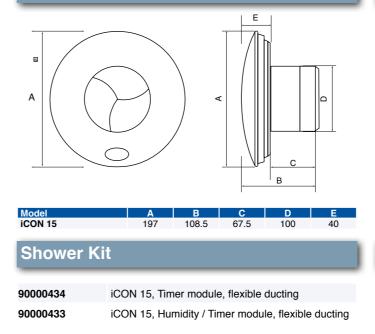





52634503

Anthracite

### **Controls and Accessories**

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories for more details.