iCON 30

Stylish toilet, bathroom and utility room ventilation





















Key Features

- Mixed flow fan
- Flow rate up to 118 m³/hr
- Recess or surface mounting
- Different colour covers available
- Perfect for longer duct runs
- Unique iris shutter, prevents backdraughts, operates silently
- Interchangeable control modules match fan to installation requirements
- Circular design, no squaring up
- IPX4 rating
- Complies with Building Regulations
- 3 year warranty

iCON 30

iCON 30 is quiet, powerful and designed for recessed or surface mounting in walls or ceilings in larger toilets, bathrooms and utility rooms.

iCON 30 is designed to provide ventilation levels that comply with the latest Building Regulations.

The iCON fan is an efficient, stylish and unique ventilation solution for the modern home. The shutter design makes switching on and off almost silent and helps reduce external noise ingress.

The slim profile and iris shutter of the iCON make it a fan which will blend discreetly into any setting.





Modules

72573602	Pull Cord
72612601	Timer
72687103	Humidity, Pull Cord with Timer overrun
72687104	Motion Sensor with Timer overrun
72687102	Motion Sensor Humidity Timer
72675701	Continuous Ventilation at 8/13 l/sec
72675702	Delayed Timer with Pull Cord
72675703	2 Speed Humidity Pull Cord boost

Covers

52634507	Silver
52634508	Sandstone
52634506	Anthracite







Anthracite

Sandstone

Dimensions (mm)

Technical data

Fan type

Mounting


Rating


Weight (kg)

Duct diameter (mm)

Max ambient temperatu

Dimensions (H x W x D) mm

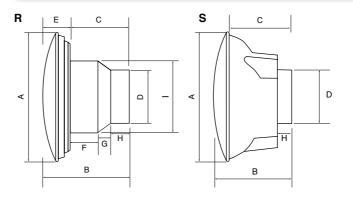



S = Surface mounted with skirt

118 / 32

Mixed Centrifugal / Axial

Wall / Ceiling

100

230v / 1ph / 50Hz

IPX4


40°C

1.11

225 x 225 x 141

Model	Α	В	С	D	E	F	G	Н	- 1
iCON 30 (R)	225	144	101	97	43	51	20	30	148
iCON 30 (S)	225	144	92	97	-	-	-	29	-
. ,									





Controls and Accessories

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories for more details.

















28

