


58mm dia.
only 6mm thick



57mm dia.
only 7mm thick

LED Flat Round

RLED
ROUND FLAT (6MM THICK) LED
FITTING



LED colours available: white or blue. Requires driver.

DRIVERS
USE **DRV12-6W-JB4** OR
DRV12-15W-JB6. SEE PAGE 58-59.

FLAT ROUND


PART NOS:
RLED19W White
RLED19B Blue

ROUND 5050

PART NOS:
RLED5050W White

LED Flat Round - 5050


RLED5050
ROUND FLAT (7MM THICK) LED
FITTING



LED colours available: white only. Requires driver.

DRIVERS
USE **DRV24-6W-JB4** OR
DRV24-15W-JB6. SEE PAGE 58-59.

HOW TO CONNECT

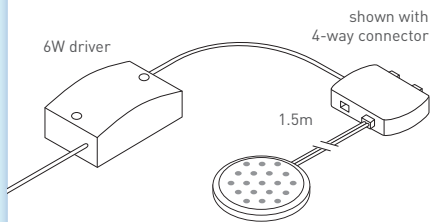

LED Rigid Flat Strip (12 or 24 LED)


SSLED
LED STRIPS CAN BE BUTTED TOGETHER.
LENGTHS - (12) 310MM, (24) 300MM



Available in blue or white LED. Requires driver and input cable.

DRIVERS
USE **DRV12-6W-JB4** OR **DRV12-15W-JB6**. SEE PAGE 58-59.

HOW TO CONNECT

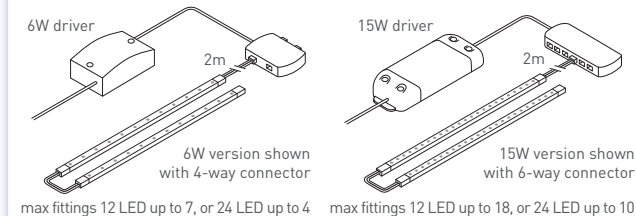

RIGID FLAT STRIP

PART NOS:		CABLES:	
SSLED12W	12 LED - White	SSLED2MC	2M input cable
SSLED12B	12 LED - Blue	SSLEDLINK3	30mm joining cable
		SSLEDLINK30	300mm joining cable
SSLED24W	24 LED - White	ACCESSORIES:	
SSLED24B	24 LED - Blue	SSLEDCLIP	Fixing bracket
		SSLEDCAP	End cap

RGB Square

SQLEDRGB
SQUARE COLOUR CHANGING
(6MM THICK) LED FITTING



For use with manual or remote control drivers shown above

DRIVERS

USE **15W DRIVER & CONTROLLER** FOR
UP TO 4 SQUARES. SEE PAGE 58-59
FOR MORE DETAILS
IR/RF CONTROLLER ALSO AVAILABLE

RGB SQUARE

PART NOS:
SQLEDRGB Square colour changing


RGB CONTROLLER KITS

RGB
MANUAL
CONTROLLER
AND DRIVER

- 1 BEEP AND RELEASE:** fix on one colour. Total seven colours: red, green, blue, purple, grey blue, yellow and white. Different colours can be chosen circularly after each sound of beep.
- 2 BEEPS AND RELEASE:** display seven colours by flashing automatically and circularly.
- 3 BEEPS AND RELEASE:** change colours gradually & circularly.
- 4 BEEPS AND RELEASE:** turn off



HOW TO CONNECT

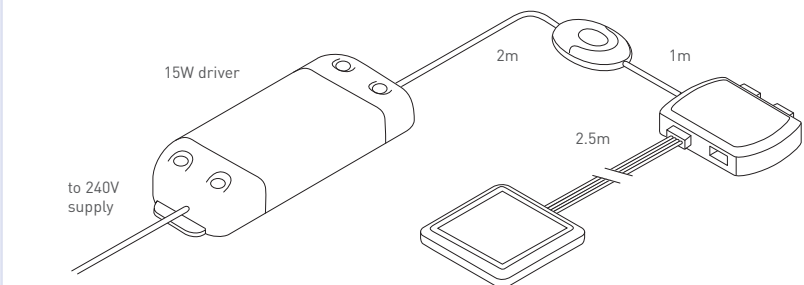

52 x 52mm sq.
only 6mm thick

