




The Severus indirect range of surface mounted LED guide lights are quick and easy to fit. The clever design means that you can now fit guide lights when you are not able to cut holes in the wall. Providing up to 50 lumens of warm white light. Packed with the latest LED technology to ensure the projection is kept to a minimum. Indirect fittings are available in round, square, landscape and portrait, with a choice of grey or black finishes



- ABS plastic & clear polycarbonate
- LED module (SMD 3014)
- Warm White – 3000K

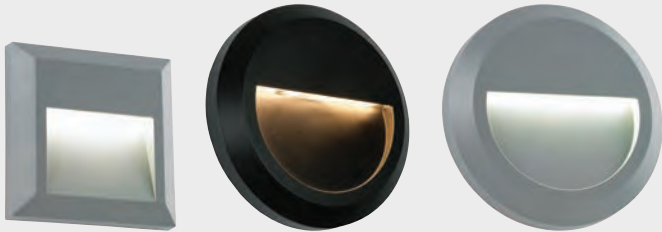

CODE	DESCRIPTION	FINISH	DIMENSIONS	LM	LM/W
61219	Severus square indirect IP65 1W	Black abs plastic	Proj: 30mm Sq: 125mm	42	42
EL-40107	Severus square indirect IP65 1W	Grey abs plastic	Proj: 30mm Sq: 125mm	42	42
61221	Severus round indirect IP65 1W	Black abs plastic	Proj: 30mm Dia: 150mm	50	50
EL-40109	Severus round indirect IP65 1W	Grey abs plastic	Proj: 30mm Dia: 150mm	50	50



- ABS plastic & clear polycarbonate
- LED module (SMD 3014)
- Warm White – 3000K



CODE	DESCRIPTION	FINISH	DIMENSIONS	LM	LM/W
61214	Severus landscape indirect IP65 2W	Black abs plastic	Proj: 30mm H: 80mm W: 230mm	65	33
EL-40104	Severus landscape indirect IP65 2W	Grey abs plastic	Proj: 30mm H: 80mm W: 230mm	65	33
61217	Severus portrait indirect IP65 0.6W	Black abs plastic	Proj: 30mm W: 200mm H: 80mm	25	42
EL-40105	Severus portrait indirect IP65 0.6W	Grey abs plastic	Proj: 30mm W: 200mm H: 80mm	25	42