




Miniature circuit-breaker

Part no. **FAZ-S16/1**

Article no. **278612**

Delivery programme

Product range			FAZ-S miniature circuit-breakers
Basic function			Miniature circuit-breakers
Tripping characteristic			S
Application			Instantaneous release response current 13 - 17 x I _n
Switching capacity			Switching Capacity 10 kA (IEC/EN 60947-2)
Rated current	I _n	A	16
Pole			1 pole
Contact sequence			

Notes


Switching capacity	10 kA
(IEC/EN 60898)	
Switching capacity	15 kA
(IEC/EN 60947-2)	

Accessories



Auxiliary contacts	→ 286054
Voltage releases	
Mounting accessories	→ 291464

FAZ-B4/1-HS, FAZ-B4/2-HS special miniature circuit-breakers with much reduced let-through energy to prevent contact welding of **auxiliary contacts**


1 pole	2 pole; 1N pole
Depth 71 mm	Depth 71 mm
Width 17.5 mm	Width 35 mm

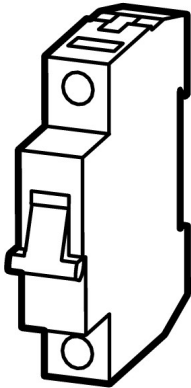

3 pole
Depth 71 mm
Width 52.5 mm



4 pole; 3N pole
Depth 71 mm
Width 70 mm



Approvals

Product Standards	IEC/EN 60947-2; IEC/EN 60898; UL 1077; CSA-C22.2 No. 235; CE marking
UL File No.	E177451
UL CCN	QVNU2, QVNU8
CSA File No.	204453
CSA Class No.	3215-30
NA Certification	UL recognized, CSA certified
Conditions of Acceptability	Supplementary Protector only
Suitable for	Branch Circuits; not as BCPD
Current Limiting CB	No
Max. Voltage Rating	277 VAC; 48 VDC
Degree of Protection	IEC: IP20; UL/CSA Type: -

Electrical


Standards			IEC/EN 60947-2 IEC/EN 60898
Rated operational voltage	U _e	V	
	U _e	V AC	
Rated operating voltage	U _e	V AC	230/400
		V DC	48 (per pole)
Rated switching capacity		kA	15
Operational switching capacity		kA	7.5
Characteristic			B, C, D
Max. back-up fuse		A gL/ gG	125
Selectivity Class			3
Lifespan	Operations		> 10000

Direction of incoming supply			as required
Mechanical			
Standard front dimension		mm	45
Enclosure height		mm	
Enclosure width		mm	80
Terminal protection			Finger and back-of-hand proof to BGV A2
Mounting width per pole		mm	17.5
Mounting			IEC/EN 60715 top-hat rail
Protection type			IP20, IP40 (when fitted)
Terminals top and bottom			Twin-purpose terminals
Terminal capacities		mm ²	
		mm ²	1 x 25
		mm ²	2 x 10
Thickness of busbar material		mm	
Material thickness		mm	0.8 ... 2
Mounting position			As required


Technical data ETIM 4.0


Frequency		Hz	50 Hz
Voltage type			AC
Mounting depth		mm	71 mm
Rated current		A	16 A
Rated voltage		V	230 V
Trip type			others
Number of poles			1
Current-limiting class			3
Overvoltage category			3
Pollution degree			2
Width in space units			1
Protection type (IP)			IP20
Neutral conductor switching with pole			false
Rated switching capacity according to EN 60898		kA	10 kA
Rated switching capacity according to IEC 60947-2		kA	0 kA
Additional equipment possible			true

Characteristics

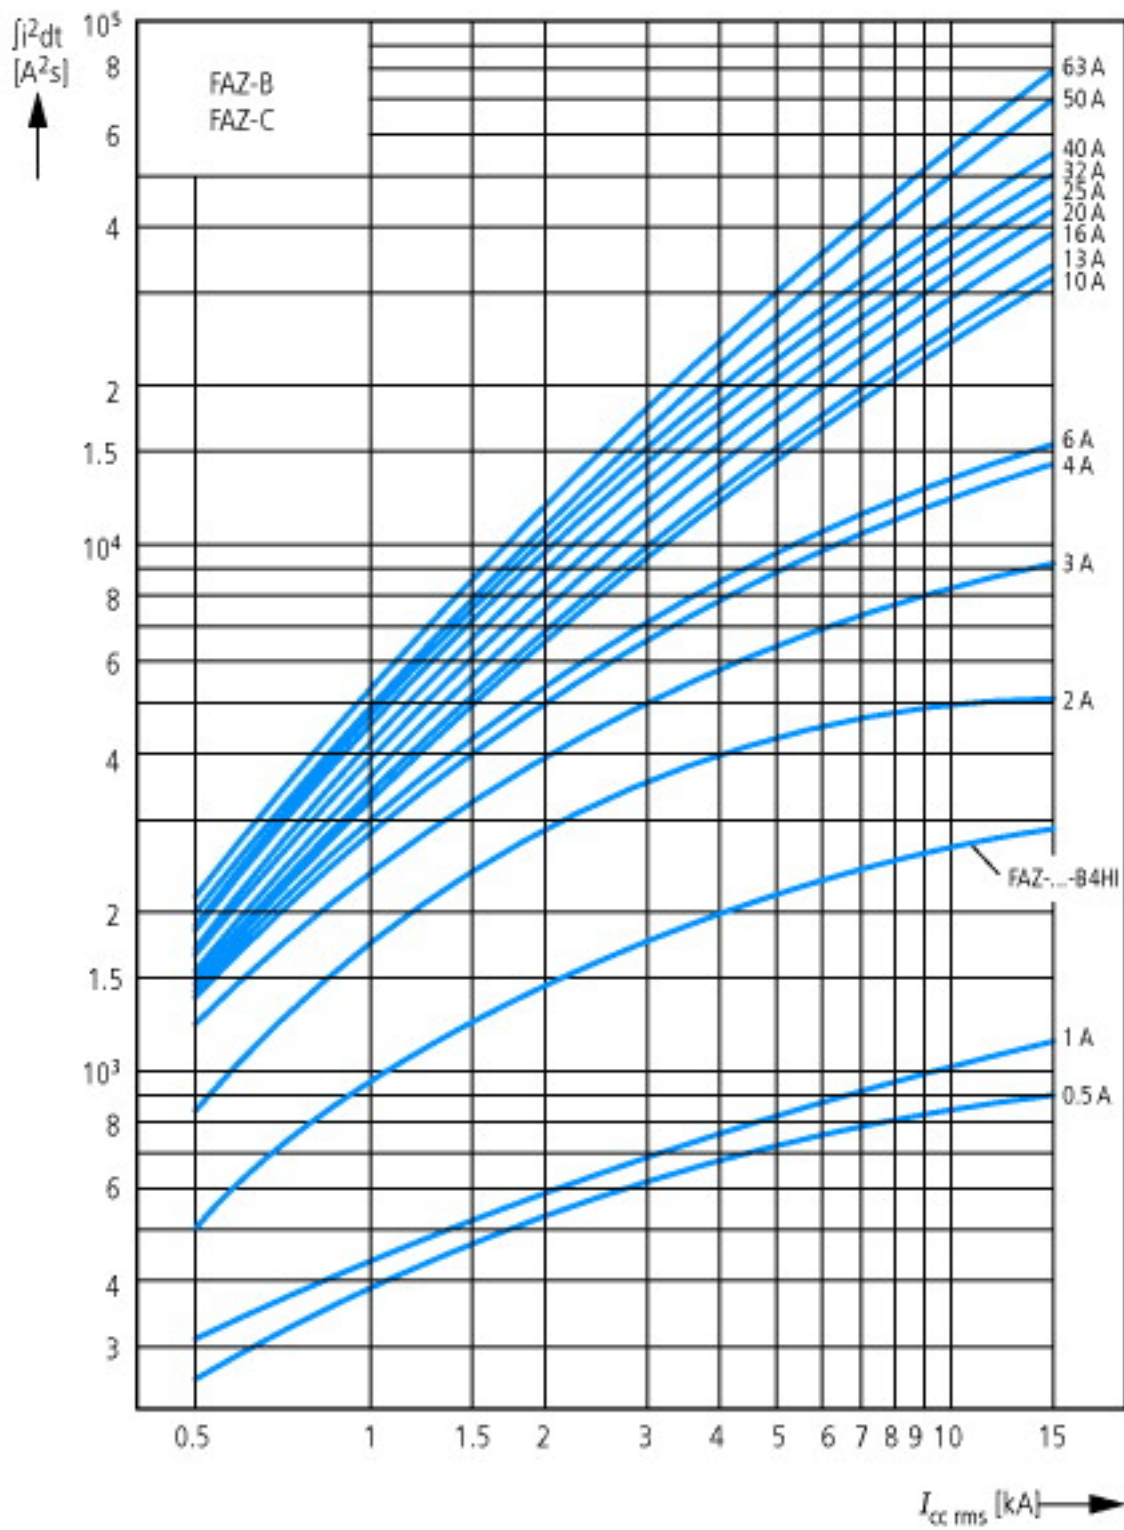



Let-through energy I^2t
According to IEC/EN 60898

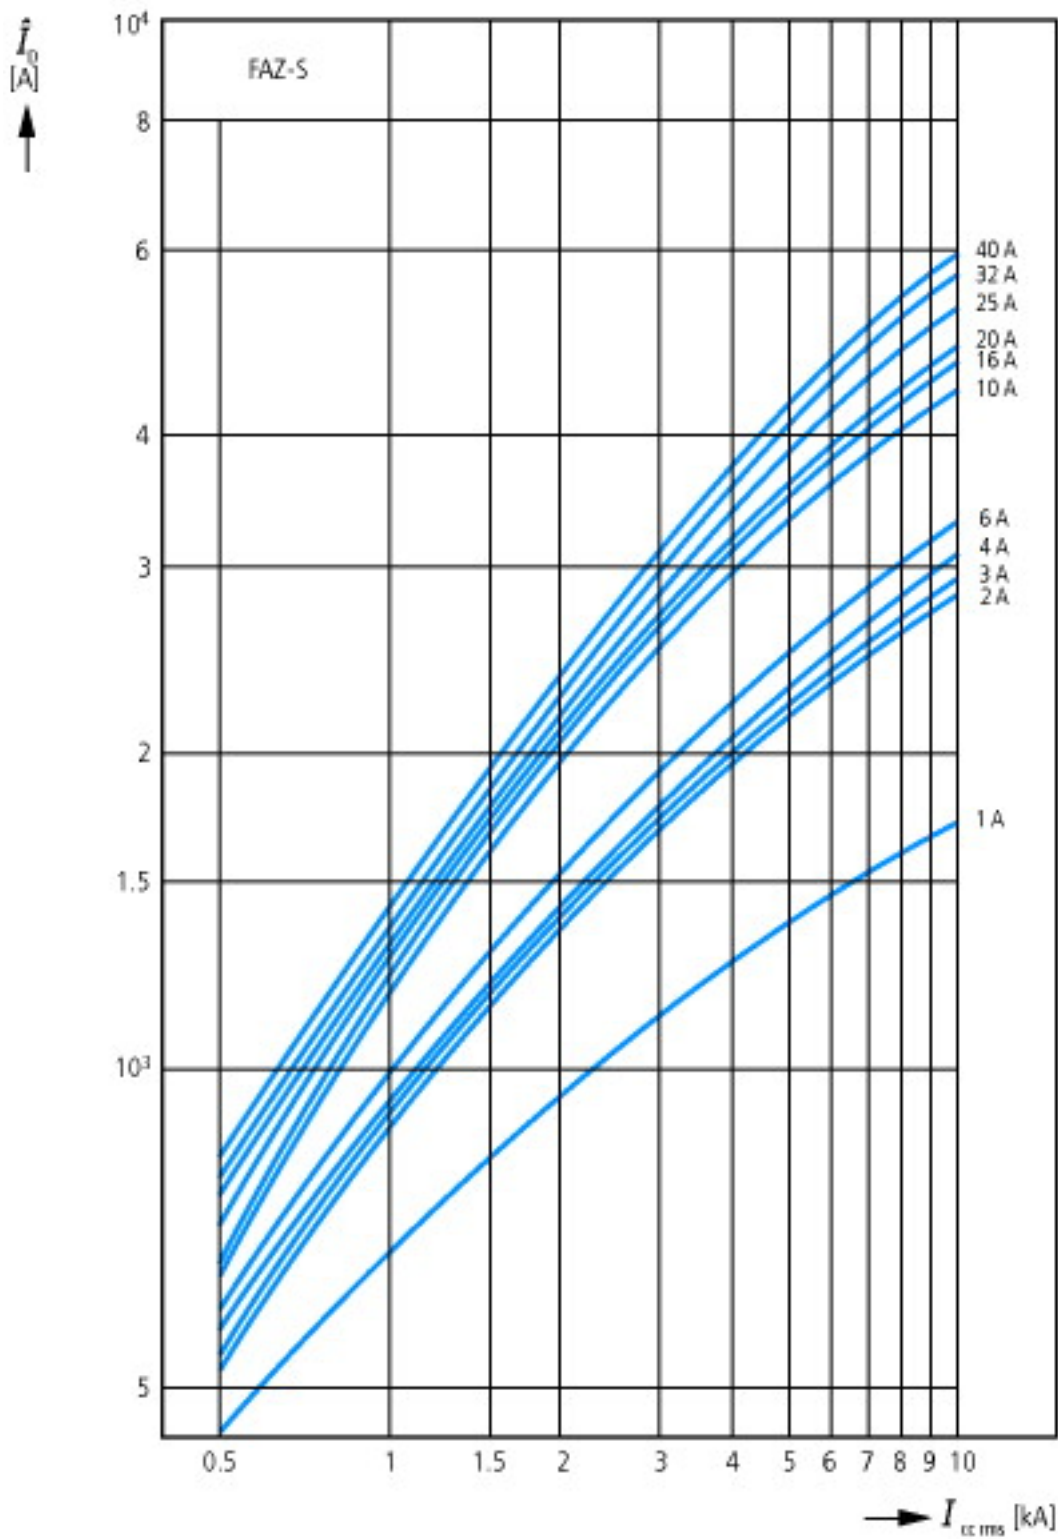

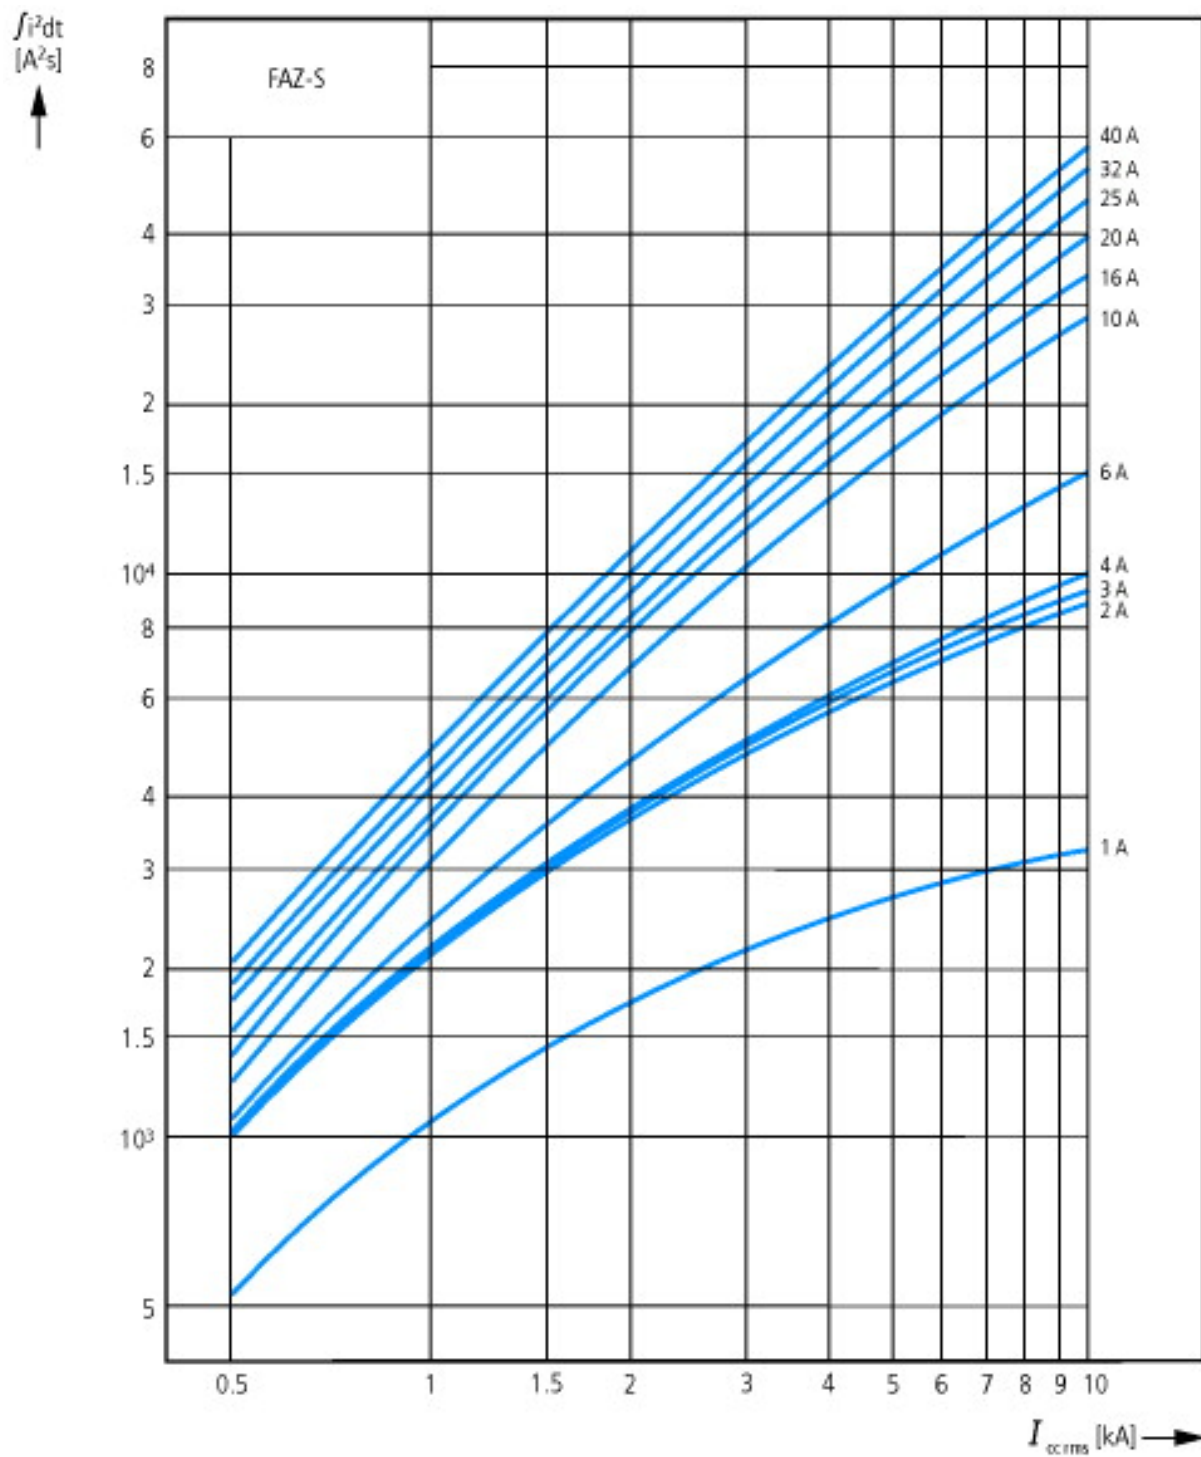


Let-through current i_D
According to IEC/EN 60898

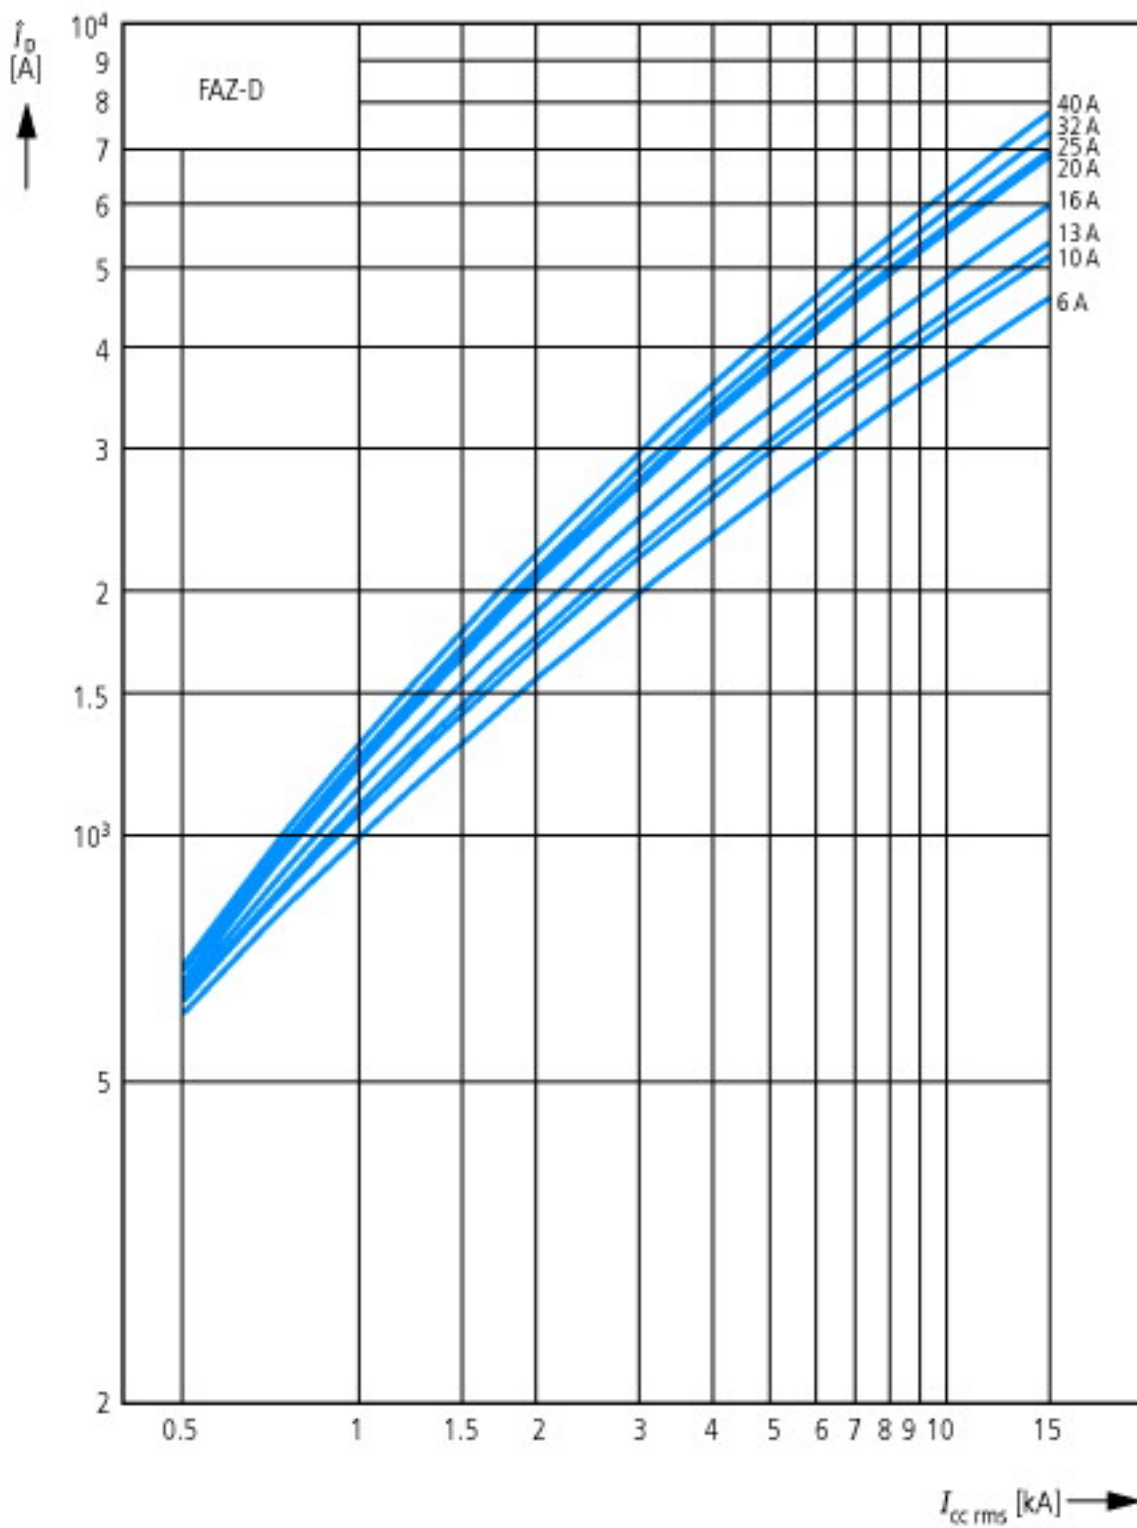

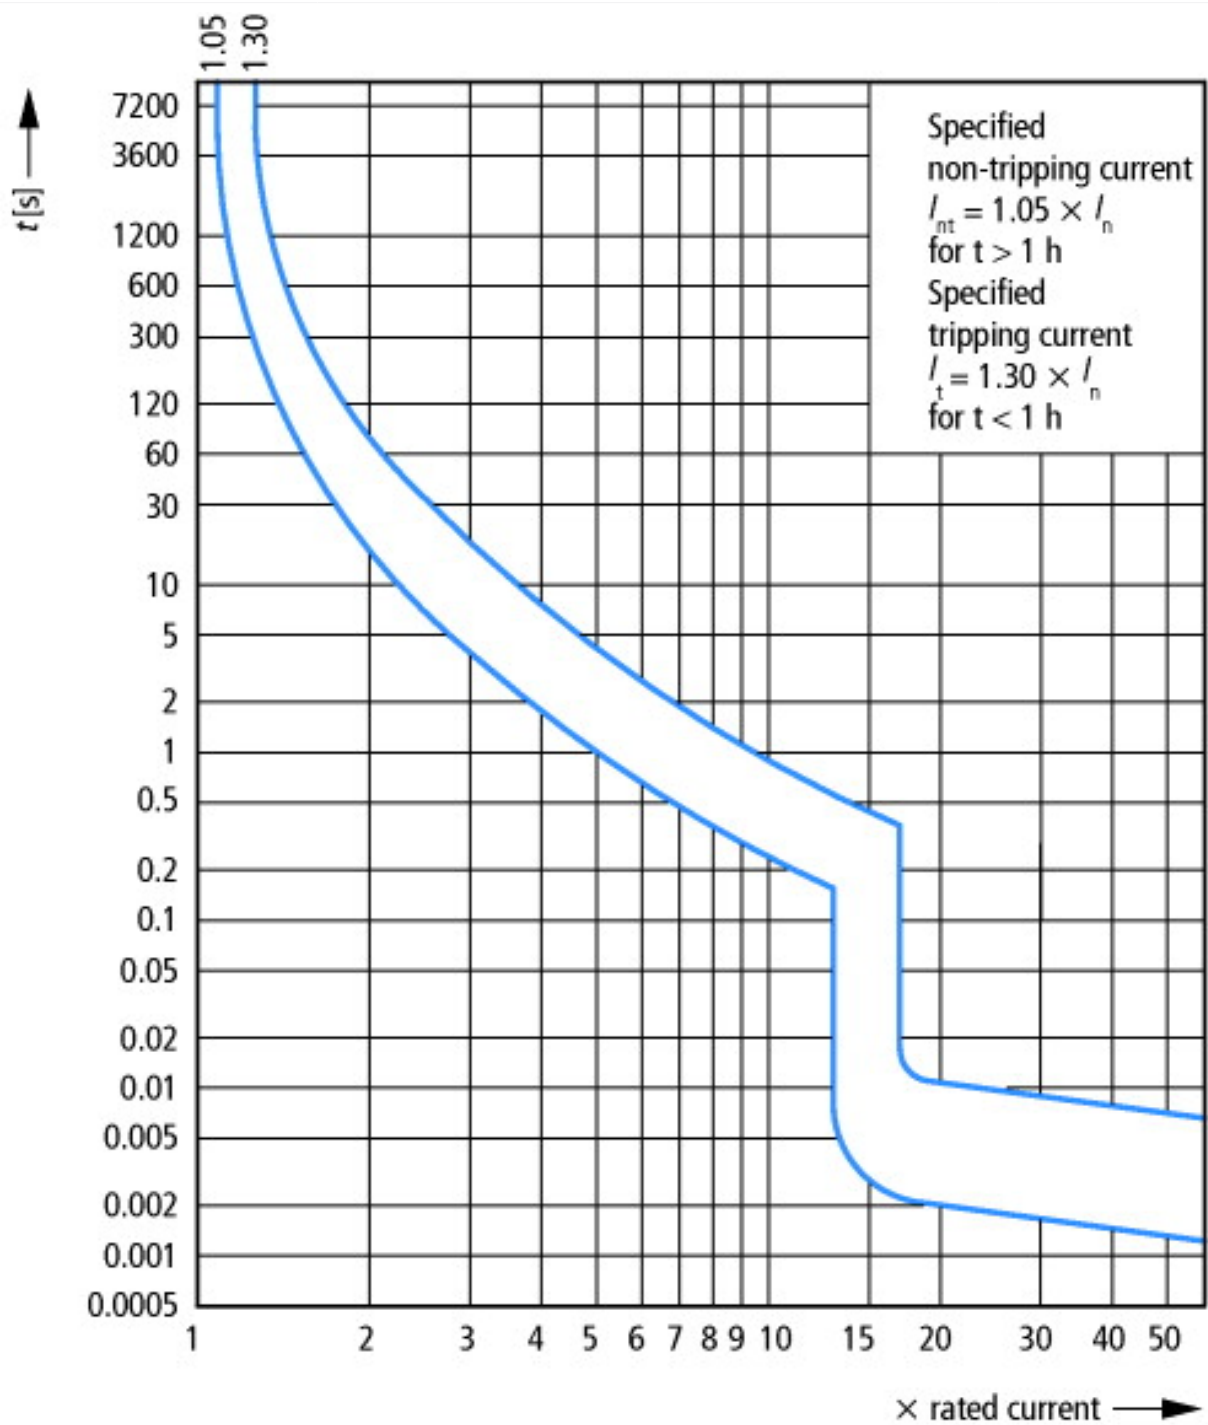

Tripping characteristic at 30 °C:
S according to IEC/EN 60947

Dimensions

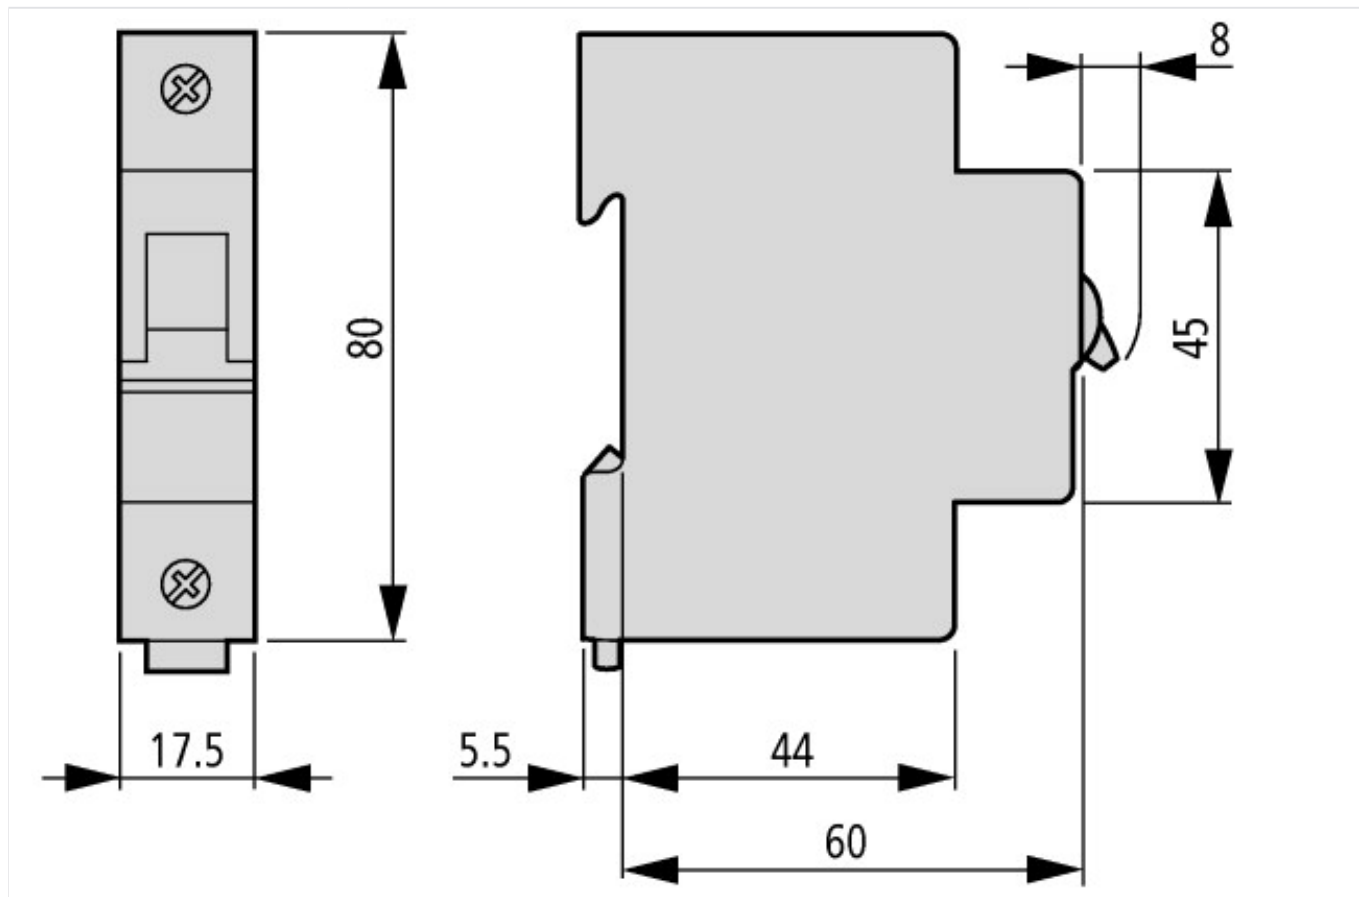

Additional product information (links)

AWA1220-1755 Circuit-breaker

AWA1220-1755 Circuit-breaker

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17550701.pdf