

IS 180-2


IS 180-2

An intelligent unit.
In form and function.

Running, hopping, romping around. Children will use any open space to play in and forget the world around them. The elegant wall-mounted IS 180-2 infrared motion sensor gives best protection against unintentional damage or accidentally being knocked off. Ideal for monitoring large properties and outdoor spaces, such as in front of the home, on driveways, in gardens or courtyards - and, being so slim, can also be mounted on non-concealed surfaces. The parallel-connectable designer wall sensor comes to you complete with corner wall mount bracket for ease of installation on external and internal corners; joined with plenty of scope for creative play.



- infrared sensor 180°
- max. 12 m
- IP54
- 1000w max.
- ideal 2 m
- 2–2000 lux
- 10 sec. – 15 min.
- in-/outside corner bracket included
- energy saving
- 3 JAHRE GARANTIE functional warranty

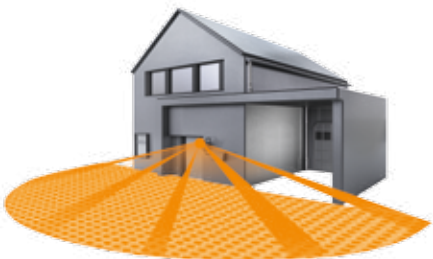

180°, 12m max.

EAN IS 180-2 white	4007841 603212
EAN IS 180-2 silver	4007841 603618
EAN IS 180-2 black	4007841 603113
Type	motion detector
Dimensions (h x w x d)	120 x 76 x 56 mm
Power supply	230 - 240V/50Hz
Sensor type	passive infrared
Where to use	indoors and outdoors
Installation	wall, corner
Max. output (resistive load, e.g. ordinary lamp)	1,000 W
Max. output (uncorrected, inductive, cos φ = 0.5, e.g. fluorescent lamps)	500 W
Max. output (electronic ballasts, capacitive, e.g. low-energy lamps)	6 each max., C ≤ 132 µF
Angle of coverage	180° with 90° angle of aperture
Capability of masking out individual segments	yes
Reach	2 basic settings: 12 m max. or 5 m max.
Response brightness	2 - 2,000 lx
Time setting	10 sec. - 15 min.
IP rating	IP54
Protection class	II
Accessories	includes corner wall mount bracket

For wall or corner mounting



UV-resistant plastic



Including corner wall mount bracket

