


Pre-insulated Terminals



End Splices

Material: Copper
Insulation: Nylon 6/6
Insulation Colour: Neutral
Max. elec. rating: 600 volts 75°C

UL approval E100455
 CSA approval 093995
 RoHS compliant




Part No.	Dimensions (mm)						Amp Rating
	mm ²	AWG	L1	L2	W	H	
15NES	0.5-1.5	22-16	18.0	12.0	4.75	6.55	19
25NES	1.5-2.5	16-14	21.0	15.0	5.40	6.80	27
6NES	4.0-6.0	12-10	25.0	15.5	7.22	8.00	48

Pack Quantity: 100

Heatshrink Butt Splice Connectors

Material: Copper, Tubular
Insulation: High density PE
Max. elec. rating ■ 19 amp
 ■ 27 amp
 ■ 48 amp
Max. elec. rating: 600 volts
Shrink temp: 150°C
Resistant temp: -10°C to +105°C

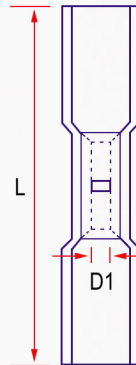

Part No.	Wire Range		Dimensions mm	
	mm ²	AWG	L	D1
15BSL/HS	0.5-1.5	22-16	35	1.8
25BSL/HS	1.5-2.5	16-14	35	2.3
6BSL/HS	4.0-6.0	12-10	42	3.5

Pack Quantity: 100

Snap Connectors

Part No.	Range mm ²
SC1.5	0.5-1.5
SC2.5	0.75-2.5
SC6	4.0-6.0

Pack Quantity: 100

- Simple to use
- Excellent electrical connection without cutting the tap wires or run wires
- Snap connector terminals data available on request.



SC1.5



SC2.5



SC6