


Non-metallic conduit systems

Accessories - Type T, Hinged 'T' Piece

2



Type PA
Hinged 'T' Piece

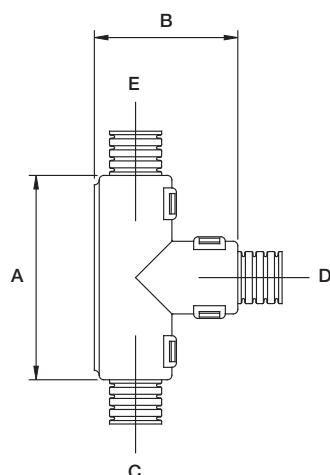

Type T

Hinged 'T' Piece / **Materials:** Polyamide (Nylon) 66 / **Colour:** Black (BL), Grey (GR)

	Part No.	Nominal Dimensions / Conduit Size				
		A	B	C	D	E
10T	T101010/BL	45.2mm	31.1mm	10mm	10mm	10mm
	T101310/BL	45.2mm	31.1mm	10mm	13mm	10mm
	T101613/BL	45.2mm	31.1mm	10mm	16mm	13mm
13T	T131010/BL	45.2mm	31.1mm	13mm	10mm	10mm
	T131013/BL	45.2mm	31.1mm	13mm	10mm	13mm
	T131310/BL	45.2mm	31.1mm	13mm	13mm	10mm
	T131313/BL	45.2mm	31.1mm	13mm	13mm	13mm
	T131613/BL	45.2mm	31.1mm	13mm	16mm	13mm
16T	T161013/BL	49.1mm	34.8mm	16mm	10mm	13mm
	T161313/BL	49.1mm	34.8mm	16mm	13mm	13mm
	T161316/BL	49.1mm	34.8mm	16mm	13mm	16mm
	T161613/BL	49.1mm	34.8mm	16mm	16mm	13mm
	T161616/BL	49.1mm	34.8mm	16mm	16mm	16mm
	T162113/BL	49.1mm	34.8mm	16mm	21mm	13mm
	T162116/BL	49.1mm	34.8mm	16mm	21mm	16mm
21T	T211016/BL	56.5mm	41.0mm	21mm	10mm	16mm
	T211021/BL	56.5mm	41.0mm	21mm	10mm	21mm
	T211316/BL	56.5mm	41.0mm	21mm	13mm	16mm
	T211321/BL	56.5mm	41.0mm	21mm	13mm	21mm
	T211613/BL	56.5mm	41.0mm	21mm	16mm	13mm
	T211616/BL	56.5mm	41.0mm	21mm	16mm	16mm
	T211621/BL	56.5mm	41.0mm	21mm	16mm	21mm
	T212113/BL	56.5mm	41.0mm	21mm	21mm	13mm
	T212116/BL	56.5mm	41.0mm	21mm	21mm	16mm
	T212121/BL	56.5mm	41.0mm	21mm	21mm	21mm
28T	T281021/BL	64.5mm	48.5mm	28mm	10mm	21mm
	T281028/BL	64.5mm	48.6mm	28mm	10mm	28mm
	T281321/BL	64.5mm	48.6mm	28mm	13mm	21mm
	T281328/BL	64.5mm	48.6mm	28mm	13mm	28mm
	T281621/BL	64.5mm	48.6mm	28mm	16mm	21mm
	T281628/BL	64.5mm	48.6mm	28mm	16mm	28mm
	T282121/BL	64.5mm	48.6mm	28mm	21mm	21mm
	T282128/BL	64.5mm	48.6mm	28mm	21mm	28mm
	T282828/BL	64.5mm	48.6mm	28mm	28mm	28mm
	T282828/BL	64.5mm	48.6mm	28mm	28mm	28mm
34T	T341634/BL	72.0mm	55.3mm	34mm	16mm	34mm
	T342128/BL	72.0mm	55.3mm	34mm	21mm	28mm
	T342134/BL	72.0mm	55.3mm	34mm	21mm	34mm
	T343434/BL	72.0mm	55.3mm	34mm	34mm	34mm

Approvals



IP Rating

Appropriate Conduit

For use with: Type PA / PI / PR / PF

IP40	Yes
IP65	N/A
IP66	N/A
IP67	N/A
IP68	N/A
IP69K	N/A

Temperature Range

Static Applications: -40°C to +120°C

Moving Applications: -5°C to +120°C

Fitting Characteristics

Snap Fit