


- 5500K Colour Temperature
- High Power 3W LED
- Aluminium bezel
- Recessed Mounted
- Charge and Discharge Protection
- Green LED indicator
- 3 Hours Emergency Duration
- Emergency light output - 105 Lumen output
- 4.8V 1800MAH Battery
- IP20 Rating
- BS EN 60598-2-22
- Weight- 0.4Kg

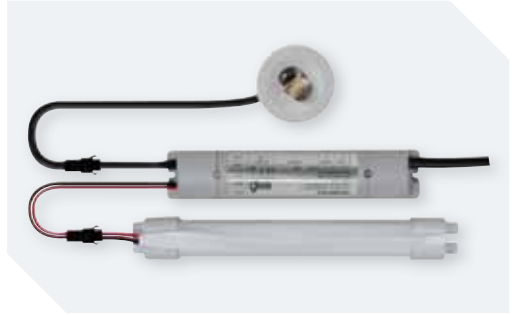

EM3WNMCDLK


LED 3W Emergency Corridor Lens Downlight

Mounting Height	Axial/ Wall	Axial/ Axial	Transverse/ Axial	Transverse/ Transverse	Transverse/ Wall
2.0m	1.5	7.6	8.4	9.1	4.1
2.5m	1.6	4.3	7.5	10.6	4.8
3.0m	1.8	4.2	8.2	12.2	5.3

Illuminance values based on a maintenance factor of 0.85

Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)

- 5500K Colour Temperature
- High Power 3W LED
- Aluminium bezel
- Recessed mounting
- Charge and discharge protection
- Green LED Indicator
- 3 Hours Emergency Duration
- Emergency light output - 138 Lumens
- 4.8V 1800mAH NI-CAD Battery
- IP20 Rating
- BS EN 60598-2-22
- Weight- 0.4Kg

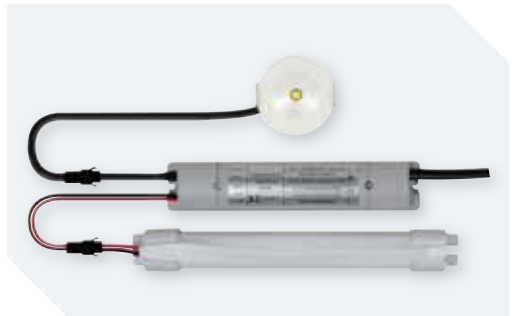

EM3WNMDLK

LED 3W Emergency Open Lens Downlight

Mounting Height	Axial/ Wall	Axial/ Axial	Transverse/ Axial	Transverse/ Transverse	Transverse/ Wall
2.0m	2.9	7.2	7.1	7.2	2.8
2.5m	3.1	7.7	7.6	7.7	2.9
3.0m	3.1	8.1	8.0	8.0	3.0

Illuminance values based on a maintenance factor of 0.85

Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)