








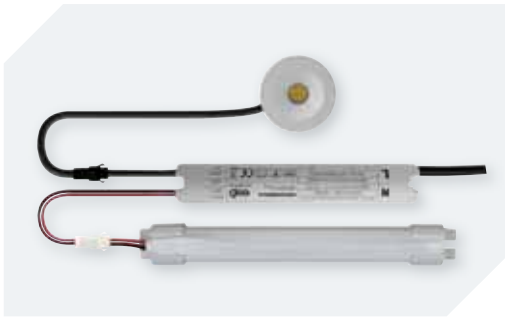
- 5500K Colour Temperature
- High Power 5W LED
- Aluminium bezel
- Recessed Mounted
- Emergency light output - 214 Lumen output
- Charge and Discharge Protection
- Green LED indicator
- 3 Hours Emergency Duration
- 4.8V 3500mAH Battery
- IP20 Rating
- BS EN 60598-2-22
- Weight- 0.9Kg

EM5WNMCDLK
LED 5W Emergency Corridor Lens Downlight



Mounting Height	 Axial/ Wall	 Axial/ Axial	 Transverse/ Axial	 Transverse/ Transverse	 Transverse/ Wall
2.0m	3.6	8.4	7.4	6.3	2.4
2.5m	4.2	9.5	8.0	6.5	2.6
3.0m	4.7	10.7	8.8	6.9	2.7






Illuminance values based on a maintenance factor of 0.85
Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)



- 5500K Colour Temperature
- High Power 5W LED
- Aluminium bezel
- Recessed Mounted
- Emergency light output - 263 Lumen output
- Charge and Discharge Protection
- Green LED indicator
- 3 Hours Emergency Duration
- 4.8V 3500mAH Battery
- IP20 Rating
- BS EN 60598-2-22
- Weight- 0.9Kg

EM5WNMDLK
LED 5W Emergency Open Lens Downlight



Mounting Height	 Axial/ Wall	 Axial/ Axial	 Transverse/ Axial	 Transverse/ Transverse	 Transverse/ Wall
2.0m	3.2	7.3	7.2	7.2	3.2
2.5m	3.7	8.4	8.4	8.4	3.7
3.0m	4.2	9.4	9.4	9.4	4.1

Illuminance values based on a maintenance factor of 0.85
Photometric spacing data 1 Lux (centre to centre in metres on emergency escape routes)