


Cat No.	Description	Wattage	Colour Temp	Lumens	Efficacy	Beam Angle	Lifetime (Hours)	Dia. (mm)	Inner Carton	Outer Carton
<b>Fire Rated LED Downlights - 2 Part Module &amp; Driver Kits</b>										
LEDACS5W40KML	Module & Driver	5W	4000k	230	48lm/w	60°	40,000	50	1	50
LEDACS5W27KML	Module & Driver	5W	2700k	220	45lm/w	60°	40,000	50	1	50
LEDACS10W40KML	Module & Dimmable Driver	10W	4000k	480	48lm/w	36°	40,000	50	1	50
LEDACS10W27KML	Module & Dimmable Driver	10W	2700k	580	58lm/w	36°	40,000	50	1	50



- 3 year guarantee
- 1 year onsite warranty
- Kit consists of: LED module & driver
- Utilises the latest Chip-on-board (COB) LED chip technology
- Options available for 2700k colour temperature to mimic halogen and 4000k for a cool white appearance
- 36° beam angle - 10 Watt
- 60° beam angle - 5 Watt
- Changeable LED modules
- 40,000 hour rated life
- 10 Watt model is dimmable



Cat No.	Description	Colour	Dia. (mm)	Inner Carton	Outer Carton
<b>Bezel Only</b>					
LFDBZBS	Brushed Steel Bezel	Brushed Steel	86	20	40
LFDBZPC	Polished Chrome Bezel	Polished Chrome	86	20	40

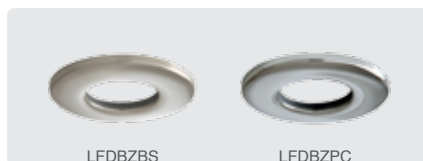

- 3 year guarantee
- 1 year onsite warranty
- Brushed stainless steel and polished chrome finishes
- Interchangeable with BG LED fire rated downlight 3 part kits

Cat No.	Description	Wattage	Colour Temp	Lumens	Colour	IP Rating	Beam Angle	Lifetime (Hours)	Dia (mm)	Inner Carton	Outer Carton
<b>Commercial LED Downlights</b>											
LBDL2IN	Commercial LED Downlight	2.5W	4200k	160	White	IP20	90°	35,000	89	1	16
LBDL3IN	Commercial LED Downlight	5.5W	4200k	360	White	IP20	90°	35,000	110	1	16
LBDL4IN	Commercial LED Downlight	8W	4200k	620	White	IP20	90°	35,000	148	1	16
LBDL6IN	Commercial LED Downlight	17W	4200k	1430	White	IP20	90°	35,000	197	1	8
LBDL8IN	Commercial LED Downlight	25W	4200k	2000	White	IP20	90°	35,000	232	1	8

- 3 year guarantee
- 1 year onsite warranty
- Ideal replacement for compact fluorescent downlights
- Offers running cost savings of up to 50% against fluorescent installations
- Retrofit in existing installations
- IP20 rated

