



Nexus Metal Wiring Accessories

Premium metal accessories, in a range of superior quality finishes that will complement any interior decor

Features & Finishes



No visible plastic around switches



Lightly lacquered surface to reduce fingerprint marks



Modern slim profile



Angled in-line colour coded captive terminals

Switches & Sockets	2
Round Pin & Export	3
FCUs	3
45 Amp Switches	4
Coax & Satellite	4
Telephone & Data	4
Dimmers	5
Shaver Sockets	5
Blank Plates	5
Key Card Switch	6
Accessories	6



Nexus Metal is available in four stocked finishes



Brushed Steel



Polished Chrome



Black Nickel



Polished Brass

For specification projects, BG can offer a wider selection of finishes. Or, if the project demands, any finish can be created to suit the requirement. Examples include:



Matt Black



Antique Brass



Cream



Pearl Nickel

Please contact your Specification Manager for more details

Nexus Metal

Cat No.	Description				Inner Carton	Outer Carton
10 Amp 10AX Switches						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBS12	NPC12	NPB12	NBN12	10AX plate switch 1 gang, 2 way	5	50
NBS13	NPC13	NPB13	NBN13	10AX plate switch intermediate	5	50
NBS14	NPC14	NPB14	NBN14	10AX plate switch bell push **	5	50
NBS15	NPC15	NPB15	NBN15	10AX plate switch 3 pole fan isolator	5	50
NBS42	NPC42	NPB42	NBN42	10AX plate switch 2 gang, 2 way	5	50
NBS43	NPC43	NPB43	NBN43	10AX plate switch 3 gang, 2 way	5	50
NBS44	NPC44	NPB44	NBN44	10AX plate switch 4 gang, 2 way	5	50

- Plate-switches manufactured to BS EN 60669-1, fan isolator to IEC 60669-2-4.
- Terminal capacity 4 x 1.0mm², 4 x 1.5mm² 2 x 2.5mm² & 1 x 4.0mm²

- Captive terminal screws
- Minimum mounting box depth 16mm
- **Bell push switch made to order, contact Customer Services for more details



13 Amp Double Pole Socket Outlets						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBS21W	NPC21W	NPB21B	NBN21B	1 gang 13A switched socket	5	50
NBS21B	-	-	-			
NBS21G	-	-	-			
NBS22W	NPC22W	NPB22B	NBN22B	2 gang 13A switched socket	5	50
NBS22B	-	-	-			
NBS22G	-	-	-			



- Manufactured to BS 1363 part 2
- Brushed Steel insert colours = White (W), Grey (G) and Black (B)
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Minimum mounting box depth 25mm

Cat No.	Description	Inner Carton	Outer Carton
Combination Plate			
NBS222GEM8	Combination plate	5	50



- Twin earth fitted as standard
- Manufactured to BS 1363 Part 2
- Terminal capacity 3 x 2.5mm², 3 x 4.0mm² & 2 x 6.0mm²
- Mounting box depth 47mm (HGS07/04)
- [See our Euro module range, for further Telecom, Data and Co-axial Options](#)

Nexus Metal

Cat No.				Description	Inner Carton	Outer Carton
Round Pin and Export Socket Outlets						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBS28W	NPC28W	NPB28B	NBN28B	2A unswitched socket round pin	5	50
NBS28G	-	-	-			
NBS29W	NPC29W	NPB29B	NBN29B	5A unswitched socket round pin	5	50
NBS29G	-	-	-			
NBS99W	NPC99W	NPB99B	NBN99B	15A 1 gang switched socket	5	50
NBS99G	-	-	-			
NBS98W	NPC98W	NPB98B	NBN98B	16A 2 gang unswitched Euro socket	5	50
NBS98G	-	-	-			



- Manufactured to BS 546
- Brushed Steel insert colours = White (W) & Grey (G)
- Minimum mounting box depth 25mm

13 Amp Fused Connection Units						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBS50	NPC50	NPB50	NBN50	13A switched FCU	5	50
NBS52	NPC52	NPB52	NBN52	13A switched FCU with power indicator	5	50
NBS53	NPC53	NPB53	NBN53	13A switched FCU with power indicator and cable outlet	5	50
NBS54	NPC54	NPB54	NBN54	13A unswitched FCU	5	50
NBS55	NPC55	NPB55	NBN55	13A unswitched FCU with cable outlet	5	50

- Manufactured to BS 1363 part 4
- Minimum mounting box depth 35mm

- Angled colour coded terminals with captive screws
- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²



20 Amp Double Pole Switches						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBS31	NPC31	NPB31	NBN31	20A DP switch with power indicator	5	50



- Manufactured to BS EN 60669-1
- Colour coded terminals with captive angled screws

- Terminal capacity 3 x 2.5mm², 2 x 4.0mm² & 1 x 6.0mm²
- Minimum mounting box depth 25mm

Nexus Metal

Cat No.				Description	Inner Carton	Outer Carton
45 Amp Double Pole Switches						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBS70W	NPC70W	NPB70B	NBN70B	45A DP with 13A socket & power indicators	5	50
NBS70B	-	-	-			
NBS70G	-	-	-			
NBS72	NPC72	NPB72	NBN72	45A DP with power indicator, double plate	5	50
NBS74	NPC74	NPB74	NBN74	45A DP with power indicator, single plate	5	50



- Cooker Control Units manufactured to BS4177, Double Pole Switches to BS EN 60669-1
- Brushed Steel insert colours = White (W), Grey (G) & Black (B)
- L & N terminal capacity 4 x 4.0mm², 3 x 6.0mm² & 1 x 16.0mm²
- E terminal capacity 3 x 4.0mm², 2 x 6.0mm² & 1 x 16.0mm²
- Minimum mounting box depth 47mm

Co-Axial and Satellite Sockets						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBS60	NPC60	NPB60	NBN60	Co-axial socket, 1 gang	5	50
NBS61*	NPC61*	NPB61*	NBN61*	Co-axial socket, 2 gang	EM	-
NBS62*	NPC62*	NPB62*	NBN62*	Isolated co-axial socket, 1 gang	EM	-
NBS63*	NPC63*	NPB63*	NBN63*	Isolated co-axial socket, 2 gang	EM	-
NBS64*	NPC64*	NPB64*	NBN64*	Satellite socket, 1 gang	EM	-
NBS65*	NPC65*	NPB65*	NBN65*	Satellite and co-axial socket, 2 gang	EM	-
NBS66*	NPC66*	NPB66*	NBN66*	Diplex TV/FM socket, 2 gang	EM	-
NBS67*	NPC67*	NPB67*	NBN67*	Triplex TV/FM/Sat - Screened	EM	-
NBS68*	NPC68*	NPB68*	NBN68*	Triplex TV/FM/Sat + Return & 1 gang Tel - Screened	EM	-
NBS69*	NPC69*	NPB69*	NBN69*	Quadplex TV/FM/Sat (x2) + Return & 1 gang Tel - Screened	EM	-

- EM = Euro Module configuration
- * Supplied as kit of Euro Module components
- Co-axial and satellite minimum mounting box depth 25mm

- Insert colours -
Polished Chrome = White, Brushed Steel = Grey
Black Nickel = Black, Polished Brass = Black
- Triplex minimum mounting box depth 35mm

* See our Euro module range, for further Telecom, Data and Co-axial Options



Telephone and Data Outlets						
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel			
NBSBTM1	NPCBTM1	NPBBTM1	NBNBTM1	Telephone master, 1 gang	5	50
NBSBTM2*	NPCBTM2*	NPBBTM2*	NBNBTM2*	Telephone master, 2 gang	EM	-
NBSBTS1	NPCBTS1	NPBBTS1	NBNBTS1	Telephone slave, 1 gang	5	50
NBSBTS2*	NPCBTS2*	NPBBTS2*	NBNBTS2*	Telephone slave, 2 gang	EM	-
NBSRJ111	NPCRJ111	NPBRJ111	NBNRJ111	RJ11 socket, 1 gang	5	50
NBSRJ112*	NPCRJ112*	NPBRJ112*	NBNRJ112*	RJ11 socket, 2 gang	EM	-
NBSRJ451	NPCRJ451	NPBRJ451	NBNRJ451	RJ45 data outlet socket, 1 gang	5	50
NBSRJ452*	NPCRJ452*	NPBRJ452*	NBNRJ452*	RJ45 data outlet socket, 2 gang	EM	-

- EM = Euro Module configuration
- * Supplied as kit of Euro Module components

- Minimum mounting box depth 35mm



Nexus Metal

Cat No.	Description			Inner Carton	Outer Carton
Fan Controller					
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel		
NBS87	NPC87	NPB87	NBN87	1 gang, 1 way rotary, 400W	5 50




- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 35mm


Dimmer Switches - Push On/Off					
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel		
NBS81P	NPC81P	NPB81P	NBN81P	1 gang, 2 way, 400W	5 50
NBS82P	NPC82P	NPB82P	NBN82P	2 gang, 2 way, 400W	5 50
NBS83P	NPC83P	NPB83P	NBN83P	3 gang, 2 way, 400W	5 50
NBS84P	NPC84P	NPB84P	NBN84P	4 gang, 2 way, 400W	5 50
NBS85P	NPC85P	NPB85P	NBN85P	1 gang, 1,000W - square plate (export only)	5 50

- Suitable for tungsten lamps, low voltage transformers & mains GU10 halogen*
- * De-rating required

- Manufactured to BS EN 60669-2-1
- Minimum mounting box depth 25mm

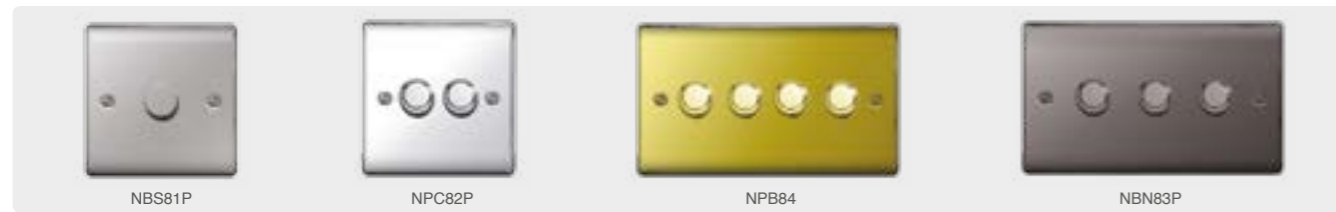

Shaver Socket					
Brushed Steel	Polished Chrome	Polished Brass	Black Nickel		
NBS20G	NPC20W	NPB20B	NBN20B	Shaver socket 115/230V dual voltage	5 50
NBS20W	-	-	-		5 50
NBS20B	-	-	-		

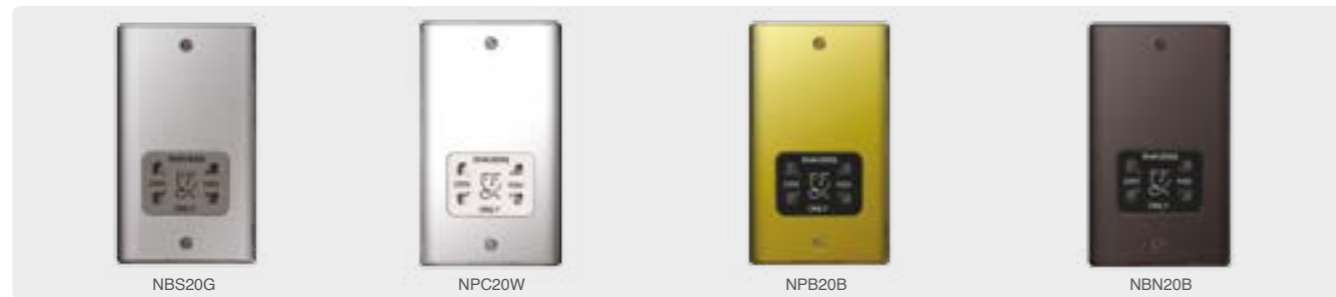

INSERT COLOURS:

Polished Chrome = White, Brushed Steel = Grey (G), White (W) & Black (B), Black Nickel = Black, Polished Brass = Black

Blank Plates					
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass		
NBS94	NPC94	NPB94	NBN94	1 gang	5 50
NBS95	NPC95	NPB95	NBN95	2 gang	5 50

- Manufactured to BS 5733



Nexus Metal

Cat No.	Description				Inner Carton	Outer Carton
Euro Module Front Plates						
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
NBSEMS1	NPCEMS1	NBNEMS1	NPBEMS1	Single euro module, single plate	10	100
NBSEMS2	NPCEMS2	NBNEMS2	NPBEMS2	Twin euro module, single plate	10	100
NBSEMR4	NPCEMR3	NBNEMR4	NPBEMR4	Quad euro module, double plate	5	50



16 Amp Hotel Key Card Switch						
Brushed Steel	Polished Chrome	Black Nickel	Polished Brass			
NBSKYCSG*	NPCKYCSW*	NBNKYCSB*	NPBKYCSB*	16 amp, hotel key card switch	EM	-



- 50 x 50mm Euro module
- Load Rating - 1800W for resistive 800W for inductive
- 30 second power-off delay
- Locator LED
- Suitable for 32mm mounting boxes
- Colour coded terminals with backed-out and captive screws
- Designed and manufactured to BS EN60669-4
- * Supplied as kit of Euro Module components

Cat No.	Description	Inner Carton	Outer Carton
13 Amp Double Pole Key Controlled Socket Outlet			
NBSKYWSG*	13 amp, double pole key controlled socket outlet	EM	-



- Lockable socket, supplied with two keys
- DP switch
- * Supplied as kit of Euro Module components

Spare Accessories			
NFS19/10	M3.5 x 19mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS28/10	M3.5 x 28mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS38/10	M3.5 x 38mm screws, pack of 10 (For Chrome + Steel)	100pks	1000
NFS19/10BN	M3.5 x 19mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS28/10BN	M3.5 x 28mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS38/10BN	M3.5 x 38mm screws, pack of 10 (For Black Nickel)	100pks	1000
NFS19/10BR	M3.5 x 19mm screws, pack of 10 (For Brass)	100pks	1000
NFS28/10BR	M3.5 x 28mm screws, pack of 10 (For Brass)	100pks	1000
NFS38/10BR	M3.5 x 38mm screws, pack of 10 (For Brass)	100pks	1000



Nexus Metal

Euro Module - Range Extension

A flexible solution of power, data, telephone, television and audio combinations to suit the wide ranging needs of the customer.


- Select the desired combination of front-plate and module(s).
- Simple installation, wire the module through the front-plate aperture then push click the module in place.



Grid - Range Extension

A customisable selection of power grid modules that provide a seamless appearance with the associated wiring accessories.

- Firstly, screw the grid frame to the mounting box and wire the modules
- Then slot the module on to the frame and click into place
- Finally, fit the finished plate

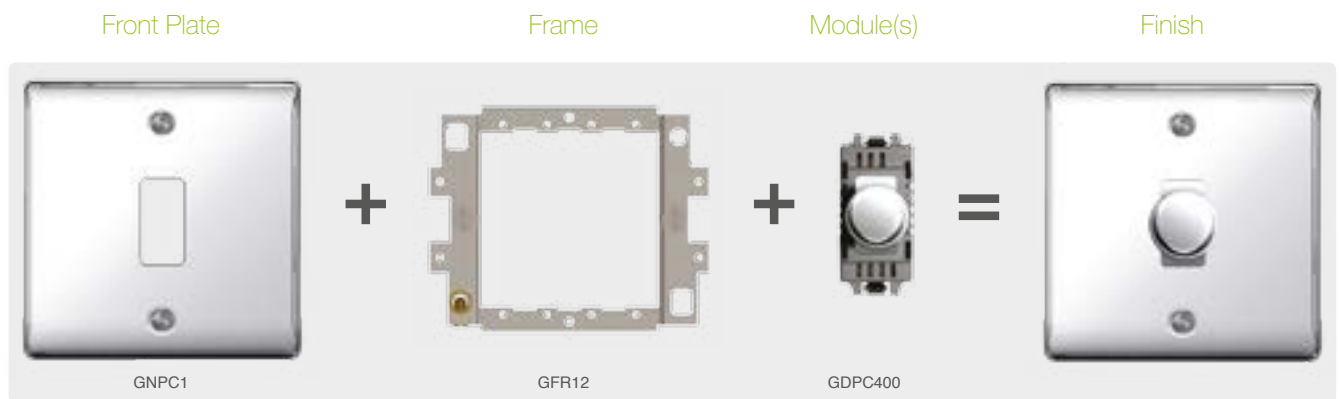

UK Technical Support

Tel: 0845 194 7584

Email: technical.support@bgelectrical.co.uk

UK & European Sales
& Distribution Centre

Stafford Park 1
Telford
Shropshire
England
TF3 3BD

Tel: +44 (0) 1952 238 100
Fax: +44 (0) 1952 238180
Email: sales@bgelectrical.co.uk

Asia Sales, Manufacturing
& Distribution

No 1438, Jiachuang Road,
Xiuzhou Industrial Park,
Jiaxing, Zhejiang
China
P.C. 314031

Tel: +86 (0) 573 8357 0200
Fax: +86 (0) 573 8357 0248
Email: sales@nexus.cn

US Sales
& Distribution

Nexus Innovations Inc
8300 FM 1960
West Suite 450
Houston, Texas
77070, United States

Tel: +1 281 671 6802
Fax: +1 281 671 6605
Email: us_sales@nexusinds.com

Middle East
Sales

Room 114
Mohd. Abdulla Latif Al Mulla Bldg
Al Muteena Street
Deira Dubai, UAE
PO Box 118704

Tel: +971 4 236 6890
Fax: +971 4 236 6857
Email: mea_sales@nexusinds.com