



Separate mounting overload relay

Part no. ZB32-XEZ
Article no. 278473
Catalog No. XTOBXDINC

Delivery programme

Product range			Accessories
Accessories			Base
Function			For separate mounting
For use with			ZB32
Notes			
Can be snap fitted on a top-hat rail to IEC/EN 60715 or can be screw fitted.			
For ZB32-38 use additional contactor BK25/3-PKZ0.			
Information relevant for export to North America			
Product Standards UL 508; CSA-C22.2 No. 14; IEC/EN 60947-4-1; CE marking			
UL File No. E29184			
UL CCN NKCR			
CSA File No. 12528			
CSA Class No. 3211-03			
NA Certification UL listed, CSA certified			
Max. Voltage Rating 600 V AC			
Degree of Protection IEC: IP20, UL/CSA Type: -			


Approvals

Product Standards	UL 508; CSA-C22.2 No. 14; IEC/EN 60947-4-1; CE marking
UL File No.	E29184
UL CCN	NKCR
CSA File No.	12528
CSA Class No.	3211-03
NA Certification	UL listed, CSA certified
Specially designed for NA	No
Max. Voltage Rating	600 V AC
Degree of Protection	IEC: IP20, UL/CSA Type: -

Technical data ETIM 4.0

Type of accessory			Base
-------------------	--	--	------

Dimensions

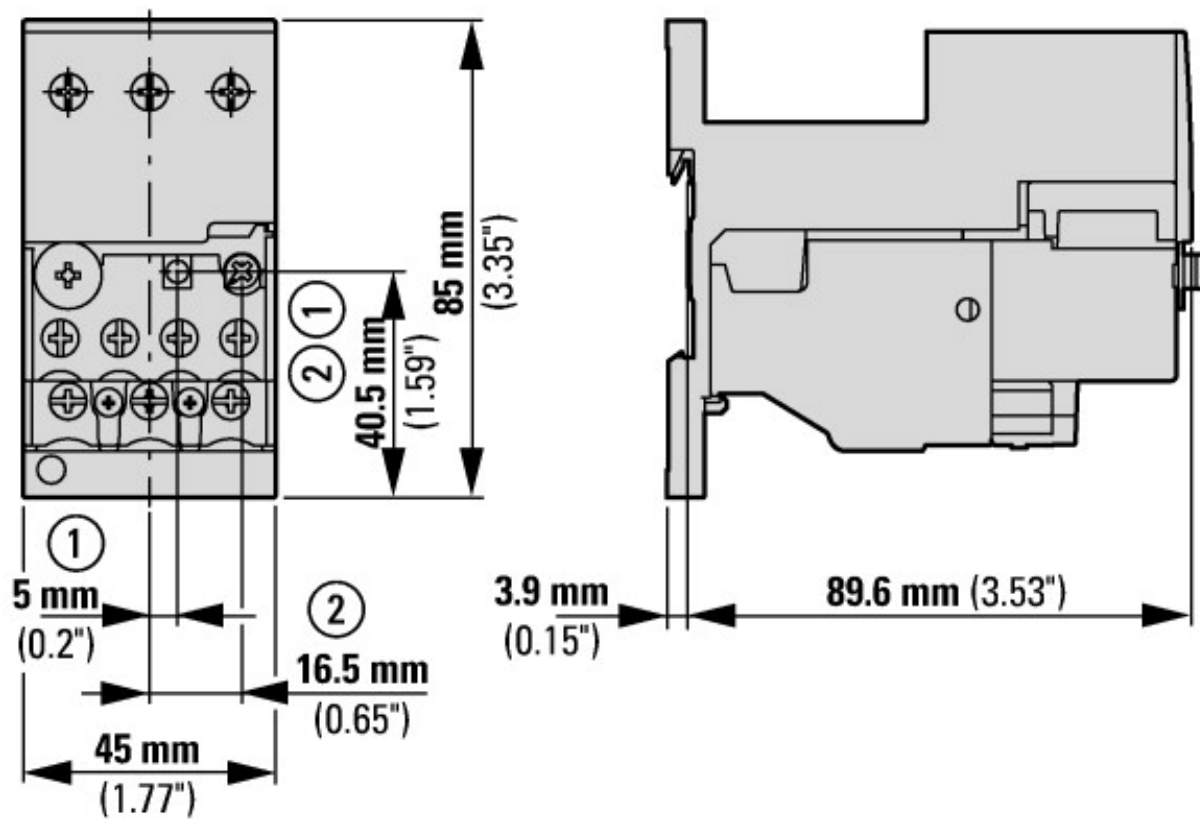

- ① OFF
- ② Reset/ON

Additional product information (links)

IL03407015Z (AWA2300-2114) Overload relay

IL03407015Z (AWA2300-2114) Overload relay

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407015Z2013_01.pdf