



**Contactor,4kW/400V,DC-operated**



Powering Business Worldwide™

**Part no. DILM9-10(24VDC)**

**Article no. 276705**

**Delivery programme**

|   |                |    |  |
|---|----------------|----|--|
| Product range   |                |    | Contactors   |
| Application   |                |    | Contactors for Motors  |
| Subrange  |                |    | Contactors up to 170 A, 3 pole   |
| Utilization category                                      |                |    | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>AC-3: Squirrel-cage motors: starting, switching off during running<br>AC-4: Squirrel-cage motors: starting, plugging, reversing, inching |
| Connection technique                                      |                |    | Screw terminals  |
| Pole  |                |    | 3 pole   |
| Rated operational current                                 |                |    |  |
| AC-3  |                |    |  |
| 380 V 400 V   | $I_e$          | A  | 9  |
| AC-1  |                |    |  |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |    |  |
| Open  |                |    |  |
| at 40 °C  | $I_{th} = I_e$ | A  | 22   |
| enclosed  | $I_{th}$       | A  | 18   |
| Conventional free air thermal current, 1 pole             |                |    |  |
| open  | $I_{th}$       | A  | 50   |
| enclosed  | $I_{th}$       | A  | 45   |
| Max. rating for three-phase motors, 50 - 60 Hz            |                |    |  |
| AC-3  |                |    |  |
| 220 V 230 V   | P              | kW | 2.5  |
| 380 V 400 V   | P              | kW | 4  |
| 660 V 690 V   | P              | kW | 4.5  |
| AC-4  |                |    |  |
| 220 V 230 V   | P              | kW | 1.5  |
| 380 V 400 V   | P              | kW | 2.5  |
| 660 V 690 V   | P              | kW | 3.6  |
| Contacts  |                |    |  |
| N/O = Normally open                                       |                |    | 1 N/O  |
| Contact sequence  |                |    |  |
| Instructions  |                |    | Contacts to EN 50012.<br>Integrated varistor suppressor circuit.   |
| Can be combined with auxiliary contact                    |                |    | DILM32-XHI..<br>DILA-XHI(V)..  |
| Voltage AC/DC   |                |    | DC operation   |

**Approvals**

Product Standards  
UL File No.  
UL CCN  
CSA File No.  
CSA Class No.  
NA Certification  
Specially designed for NA

IEC/EN 60947-4-1; UL 508; CSA-C22.2 No. 14-05; CE marking  
E29096  
NLDX  
012528  
2411-03, 3211-04  
UL listed, CSA certified  
No

**General**

|                      |  |  |                                 |
|----------------------|--|--|---------------------------------|
| Standards            |  |  | IEC/EN 60947, VDE 0660, UL, CSA |
| Lifespan, mechanical |  |  |                                 |

|   |              |                      |  |
|---|--------------|----------------------|--|
| AC operated   | Operations   | x<br>10 <sup>6</sup> | 10   |
| DC operated   | Operations   | x<br>10 <sup>6</sup> | 10   |
| Operating frequency, mechanical                                       |              |                      |  |
| AC operated   | Operations/h |                      | 5000   |
| DC operated   | Operations/h |                      | 5000   |
| Climatic proofing   |              |                      |  |
|   |              |                      | Damp heat, constant to IEC 60068-2-78<br>Damp heat, cyclic to IEC 60068-2-30 |
| Ambient temperature   |              |                      |  |
| Open  |              | °C                   | - 25 - 60  |
| Enclosed  |              | °C                   | - 25 - 40  |
| Storage   |              | °C                   | - 40 - 80  |
| Mounting position, AC- and DC operated                                |              |                      |  |
|   |              |                      |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |              |                      |  |
| Half-sinusoidal shock, 10 ms  |              |                      |  |
| Main contacts   |              |                      |  |
| N/O contact   |              | g                    | 10   |
| Auxiliary contacts  |              |                      |  |
| N/O contact   |              | g                    | 7  |
| N/C contact   |              | g                    | 5  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted |              |                      |  |
| Half-sinusoidal shock, 10 ms  |              |                      |  |
| Main contacts   |              |                      |  |
| N/O contact   |              | g                    | 5.7  |
| Auxiliary contacts  |              |                      |  |
| N/O contact   |              | g                    | 3.4  |
| N/C contact   |              | g                    | 3.4  |
| Protection type   |              |                      |  |
| Protection against direct contact when actuated from front (EN 50274) |              |                      | Finger- and back-of-hand proof   |
| Weight  |              |                      |  |
| AC operated   |              | kg                   | 0.23   |
| DC operated   |              | kg                   | 0.28   |
| Terminal capacity main cable  |              |                      |  |
| Solid   |              | mm <sup>2</sup>      | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule   |              | mm <sup>2</sup>      | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)   |
| Also without ferrule.   |              |                      |  |
| Solid or stranded   |              | AWG                  | 18 - 10  |
| Main cable connection screw/bolt                                      |              |                      |  |
| Tightening torque   |              |                      | M3.5   |
| Terminal capacity control circuit cables                              |              |                      | 1.2  |
| Solid   |              | mm <sup>2</sup>      | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule   |              | mm <sup>2</sup>      | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5)   |
| Solid or stranded   |              | AWG                  | 18 - 14  |
| Control circuit cable connection screw/bolt                           |              |                      |  |
| Tightening torque   |              |                      | M3.5   |
| Tool  |              |                      | 1.2  |

|   |  |                 |                                      |
|---|--|-----------------|--------------------------------------|
| <b>Main cable</b>                               |  |                 |                                      |
| Pozidriv screwdriver                            |  | Size            | 2                                    |
| Standard screwdriver                            |  | mm              | 0.8 x 5.5<br>1 x 6                   |
| <b>Control circuit cables</b>                   |  |                 |                                      |
| Pozidriv screwdriver                            |  | Size            | 2                                    |
| Standard screwdriver                            |  | mm              | 0.8 x 5.5<br>1 x 6                   |
| <b>Terminal capacity main cable</b>             |  |                 |                                      |
| Solid   |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| flexible  |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| flexible with ferrules                          |  | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5) |
| Solid or stranded                               |  | AWG             | 18 - 14                              |
| <b>Terminal capacity control circuit cables</b> |  |                 |                                      |
| Solid   |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Flexible  |  | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Flexible with ferrule                           |  | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5) |
| Solid or stranded                               |  | AWG             | 18 - 14                              |
| <b>Tool</b>                                     |  |                 |                                      |
| Stripping length                                |  | mm              | 10                                   |
| Screwdriver blade width                         |  | mm              | 3.5                                  |

### Main conducting paths

|   |                |         |       |
|---|----------------|---------|-------|
| Rated impulse withstand voltage                     | $U_{imp}$      | V<br>AC | 8000  |
| Overvoltage category/pollution degree               |                |         | III/3 |
| Rated insulation voltage                            | $U_i$          | V<br>AC | 690   |
| Rated operational voltage                           | $U_e$          | V<br>AC | 690   |
| Safe isolation to VDE 0106 Part 101 and Part 101/A1 |                |         |       |
| between coil and contacts                           |                | V<br>AC | 400   |
| between the contacts                                |                | V<br>AC | 400   |
| Making capacity (p.f. to IEC/EN 60947)              |                |         |       |
|   | Up to 690 V    | A       | 112   |
| Breaking capacity                                   |                |         |       |
| 220 V 230 V   |                | A       | 90    |
| 380 V 400 V AC                                      |                | A       | 90    |
| 500 V   |                | A       | 70    |
| 660 690 V AC  |                | A       | 50    |
| Short-circuit rating                                |                |         |       |
| Short-circuit protection maximum fuse               |                |         |       |
| Type "2" coordination                               |                |         |       |
| 400 V   | gG/gL<br>500 V | A       | 20    |
| 690 V   | gG/gL<br>690 V | A       | 16    |
| Type "1" coordination                               |                |         |       |
| 400 V   | gG/gL<br>500 V | A       | 35    |
| 690 V   | gG/gL<br>690 V | A       | 20    |

### AC

|                           |  |  |  |
|---------------------------|--|--|--|
| <b>AC-1</b>               |  |  |  |
| Rated operational current |  |  |  |

|   |                |     |     |
|---|----------------|-----|-----|
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |     |     |
| Open  |                |     |     |
| at 40 °C  | $I_{th} = I_e$ | A   | 22  |
| at 50 °C  | $I_{th} = I_e$ | A   | 21  |
| at 55 °C  | $I_{th} = I_e$ | A   | 21  |
| at 60 °C  | $I_{th} = I_e$ | A   | 20  |
| enclosed  | $I_{th}$       | A   | 18  |
| Conventional free air thermal current, 1 pole             |                |     |     |
| open  | $I_{th}$       | A   | 50  |
| enclosed  | $I_{th}$       | A   | 45  |
| <b>AC-3</b>   |                |     |     |
| Rated operational current                                 |                |     |     |
| Open, 3-pole: 50 – 60 Hz                                  |                |     |     |
| 220 V 230 V   | $I_e$          | A   | 9   |
| 240 V   | $I_e$          | A   | 9   |
| 380 V 400 V   | $I_e$          | A   | 9   |
| 415 V   | $I_e$          | A   | 9   |
| 440V  | $I_e$          | A   | 9   |
| 500 V   | $I_e$          | A   | 7   |
| 660 V 690 V   | $I_e$          | A   | 5   |
| Motor rating  | P              | kWh |     |
| 220 V 230 V   | P              | kW  | 2.5 |
| 240V  | P              | kW  | 3   |
| 380 V 400 V   | P              | kW  | 4   |
| 415 V   | P              | kW  | 5.5 |
| 440 V   | P              | kW  | 5.5 |
| 500 V   | P              | kW  | 4.5 |
| 660 V 690 V   | P              | kW  | 4.5 |
| <b>AC-4</b>   |                |     |     |
| Open, 3-pole: 50 – 60 Hz                                  |                |     |     |
| 230 V   | $I_e$          | A   | 6   |
| 240 V   | $I_e$          | A   | 6   |
| 400 V   | $I_e$          | A   | 6   |
| 415 V   | $I_e$          | A   | 6   |
| 440 V   | $I_e$          | A   | 6   |
| 500 V   | $I_e$          | A   | 5   |
| 690 V   | $I_e$          | A   | 4.5 |
| Motor rating  | P              | kWh |     |
| 230 V   | P              | kW  | 1.5 |
| 240 V   | P              | kW  | 1.6 |
| 400 V   | P              | kW  | 2.5 |
| 415 V   | P              | kW  | 2.8 |
| 440 V   | P              | kW  | 3   |
| 500 V   | P              | kW  | 2.8 |
| 690 V   | P              | kW  | 3.6 |

## DC

|                                 |       |   |     |
|---------------------------------|-------|---|-----|
| Rated operational current, open |       |   |     |
| DC-1                            |       |   |     |
| 60 V                            | $I_e$ | A | 20  |
| 110 V                           | $I_e$ | A | 20  |
| 220 V                           | $I_e$ | A | 15  |
| 440 V                           | $I_e$ | A | 1.3 |
| DC-3                            |       |   |     |

|       |                |   |     |
|-------|----------------|---|-----|
| 60 V  | I <sub>e</sub> | A | 20  |
| 110 V | I <sub>e</sub> | A | 20  |
| 220 V | I <sub>e</sub> | A | 1.5 |
| 440 V | I <sub>e</sub> | A | 0.2 |
| DC-5  |                |   |     |
| 60 V  | I <sub>e</sub> | A | 20  |
| 110 V | I <sub>e</sub> | A | 20  |
| 220 V | I <sub>e</sub> | A | 1.5 |
| 440 V | I <sub>e</sub> | A | 0.2 |

### Current heat loss

|   |  |    |     |
|---|--|----|-----|
| 3-pole at I <sub>th</sub>                         |  | W  | 3   |
| Current heat loss at I <sub>e</sub> to AC-3/400 V |  | W  | 0.6 |
| Impedance per pole                                |  | mΩ | 2.5 |

### Magnet systems

|  |          |                  |   |
|--|----------|------------------|---|
| Voltage tolerance  |          | x U <sub>c</sub> |   |
| AC operated  | Pick-up  | x U <sub>c</sub> | 0.8 - 1.1   |
| Drop-out voltage AC operated   | Drop-out | x U <sub>c</sub> | 0.3 - 0.6   |
| Notes  |          |                  | 0.7 – 1.3 without auxiliary contact module and at ambient air temperature + +40 °C  |
| DC operated  | Pick-up  | x U <sub>c</sub> | 0.7 - 1.2   |
| Notes  |          |                  | at least smoothed two-phase bridge rectifier or three-phase rectifier               |
| DC operated  | Drop-out | x U <sub>c</sub> | 0.15 - 0.6  |
| Power consumption of the coil in a cold state and 1.0 x U <sub>c</sub> |          |                  |   |
| 50 Hz  | Pick-up  | VA               | 24  |
| 50 Hz  | Sealing  | VA               | 3.4   |
| 50 Hz  | Sealing  | W                | 1.2   |
| 60 Hz  | Pick-up  | VA               | 30  |
| 60 Hz  | Sealing  | VA               | 4.4   |
| 60 Hz  | Sealing  | W                | 1.4   |
| 50/60 Hz   | Pick-up  | VA               | 27<br>25  |
| 50/60 Hz   | Sealing  | VA               | 4.2<br>3.3  |
| 50/60 Hz   | Sealing  | W                | 1.4<br>1.2  |
| DC operated  | Pick-up  | W                | 3   |
| DC operated  | Sealing  | W                | 3   |
| Duty factor  |          | %<br>DF          | 100   |
| Switching times at 100 % U <sub>c</sub> (approximate values)           |          |                  |   |
| Main contacts  |          |                  |   |
| AC operated  |          |                  |   |
| Closing delay  |          | ms               | 15 - 21   |
| Opening delay  |          | ms               | 9 - 18  |
| DC operated  |          | ms               |   |
| Closing delay  |          | ms               | 31  |
| Opening delay  |          | ms               | 12  |
| Arcing time  |          | ms               | 10  |
| Lifespan, mechanical; Coil 50/60 Hz                                    | at 50 Hz |                  | Mechanical lifespan at 50 Hz approx. 30% lower than under "Technical data, general" |

### Electromagnetic compatibility (EMC)


|                       |  |  |               |
|-----------------------|--|--|---------------|
| Emitted interference  |  |  | to EN 60947-1 |
| Interference immunity |  |  | to EN 60947-1 |

### Technical data ETIM 4.0


|   |  |  |    |
|---|--|--|----|
| Number of main contacts as N/Os                       |  |  | 3  |
| Rated operation current I <sub>e</sub> at AC-1, 400 V |  |  | 14 |

|  |     |                  |
|--|-----|------------------|
| Connection type main circuit                 |     | Screw connection |
| Rated control voltage $U_s$ at AC 60HZ       | V   | 0                |
| Number of auxiliary contacts as N/Os         |     | 1                |
| Rated control voltage $U_s$ at AC 50HZ       | V   | 0                |
| Number of auxiliary contacts as N/Cs         |     | 0                |
| Suitable for rail-mounting                   |     | No               |
| Rated control voltage $U_s$ at DC            | V   | 24               |
| Voltage type for actuation                   |     | DC               |
| Rated operation current $I_e$ at AC-3, 400 V | A   | 9                |
| Number of N/Cs as main contact               |     | 0                |
| Motor rating at AC-3, 400 V                  | kWh | 4                |


## Characteristics

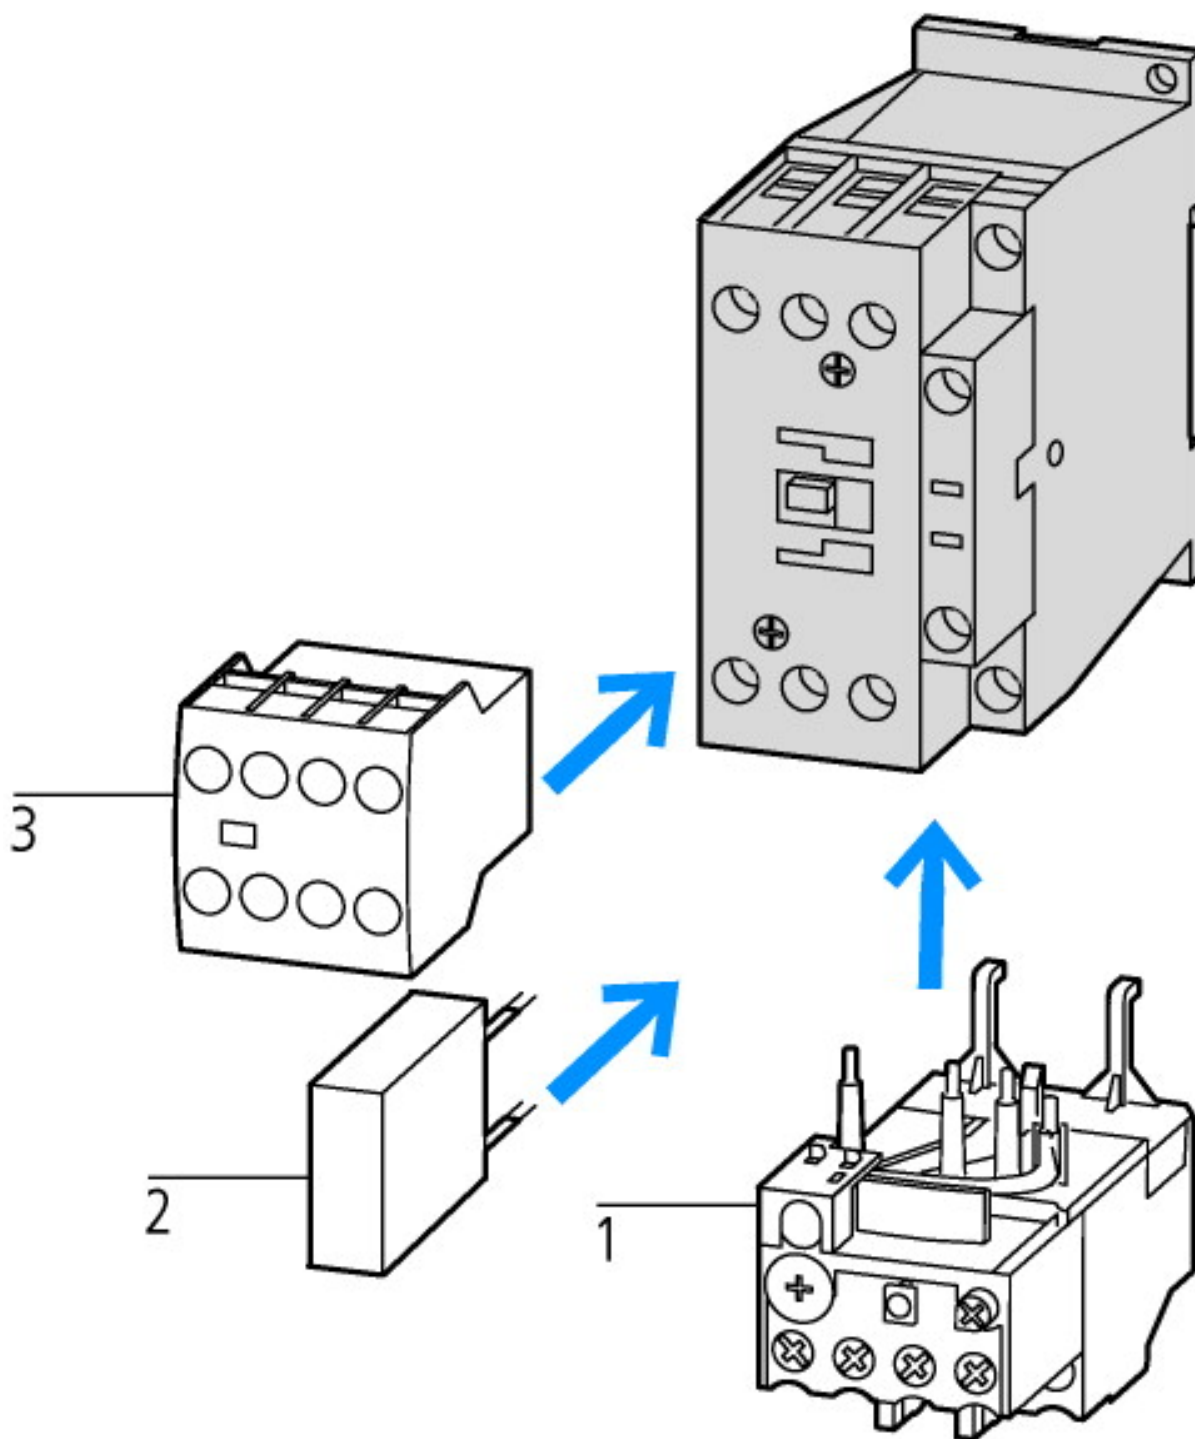

- 1: Overload relay
- 2: Suppressor
- 3: Auxiliary contact modules

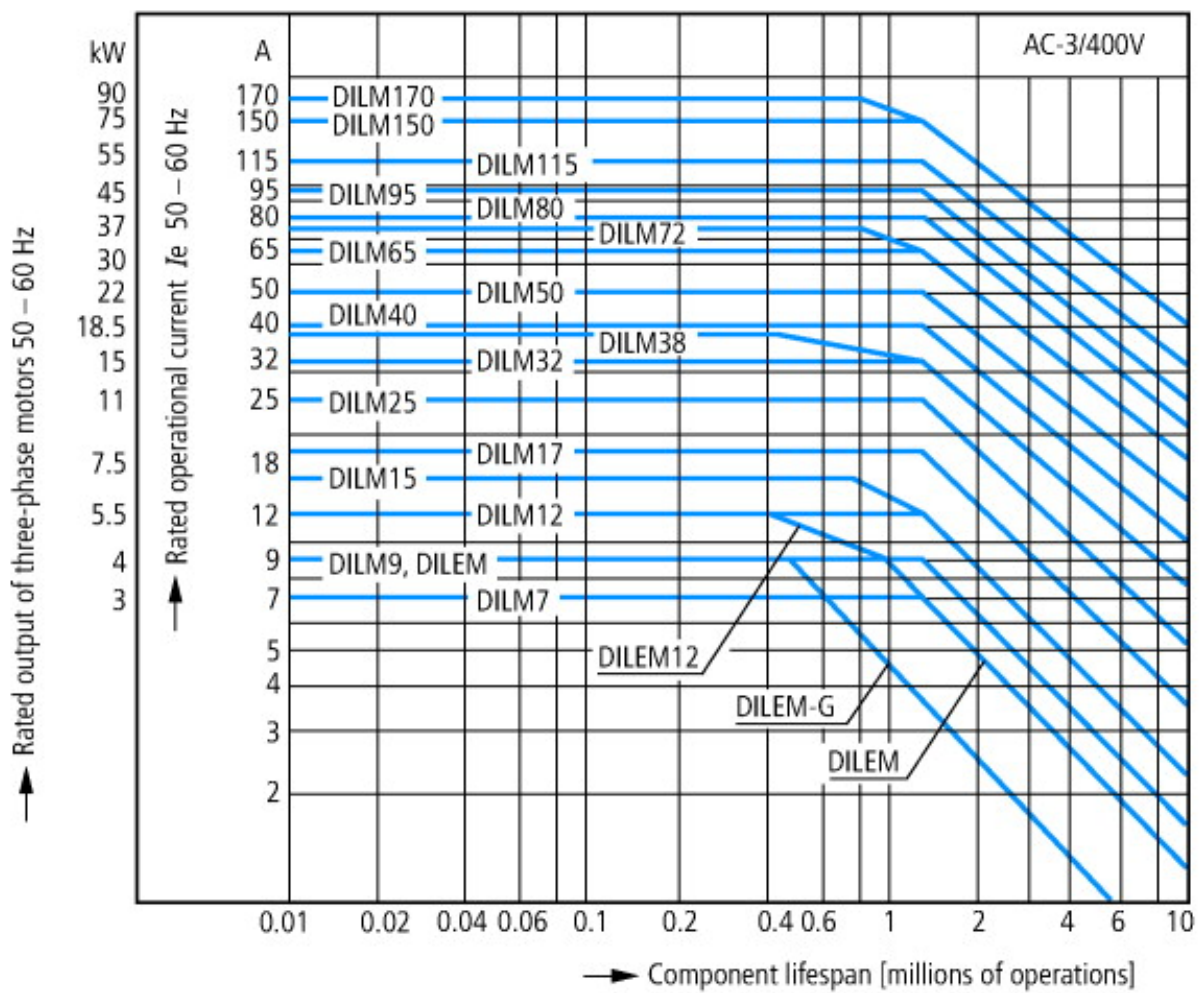


- Squirrel-cage motor
- Operating characteristics
- Starting: from rest
- Stopping: after attaining full running speed
- Electrical characteristics
- Make: up to 6 x rated motor current
- Break: up to 1 x rated motor current
- Utilization category
- 100 % AC-3
- Typical applications
- Compressors
- Lifts
- Mixers
- Pumps
- Escalators
- Agitators
- Fans
- Conveyor belts
- Centrifuges
- Hinged flaps
- Bucket-elevators
- Air conditioning system
- General drives in manufacturing and processing machines

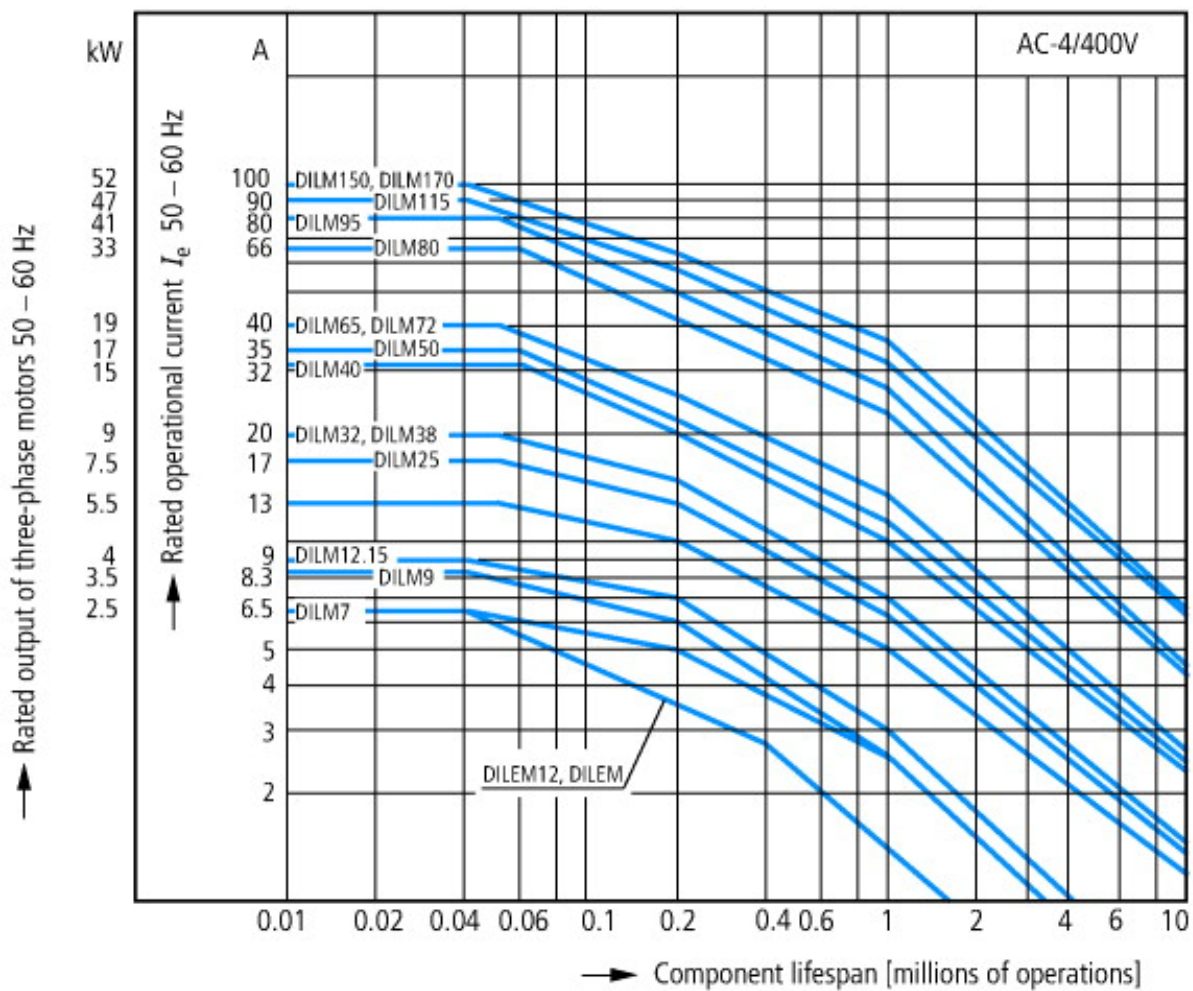


- Extreme switching duty
- Squirrel-cage motor
- Operating characteristics
- Inching, plugging, reversing
- Electrical characteristics
- Make: up to 6 x rated motor current
- Break: up to 6 x rated motor current
- Utilization category
- 100 % AC-4
- Typical applications
- Printing presses
- Wire-drawing machines
- Centrifuges
- Special drives for manufacturing and processing machines

## Dimensions



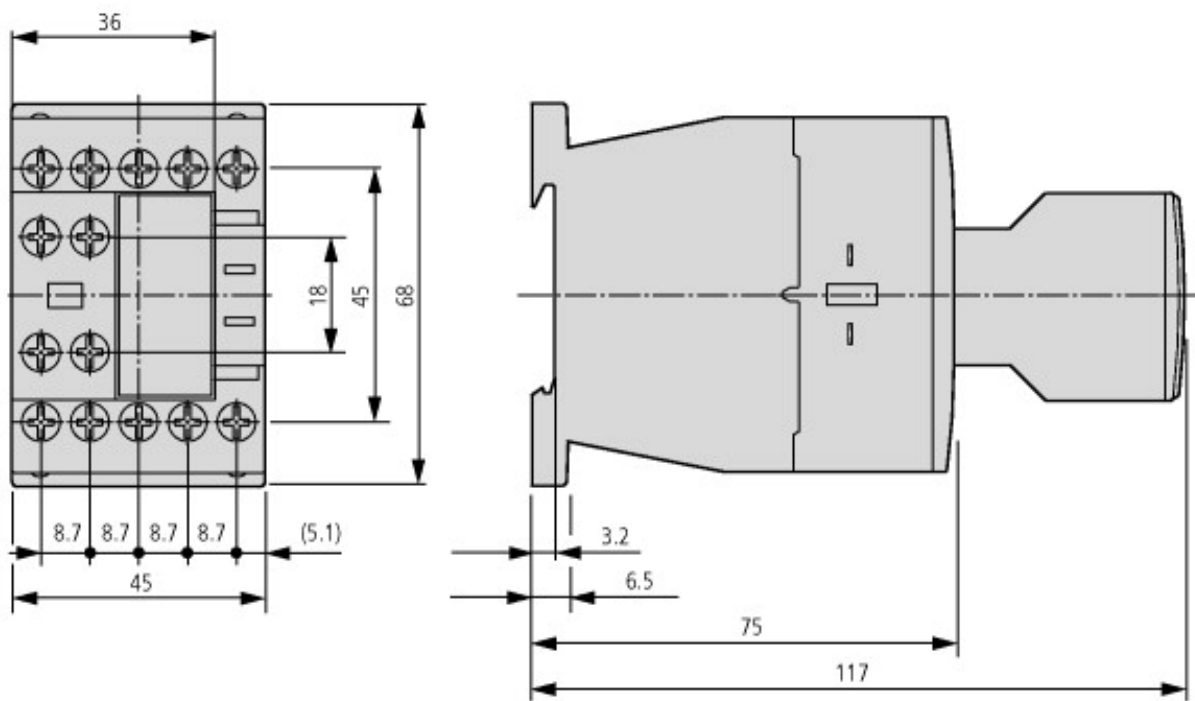

Contacteur avec module de contact auxiliaire

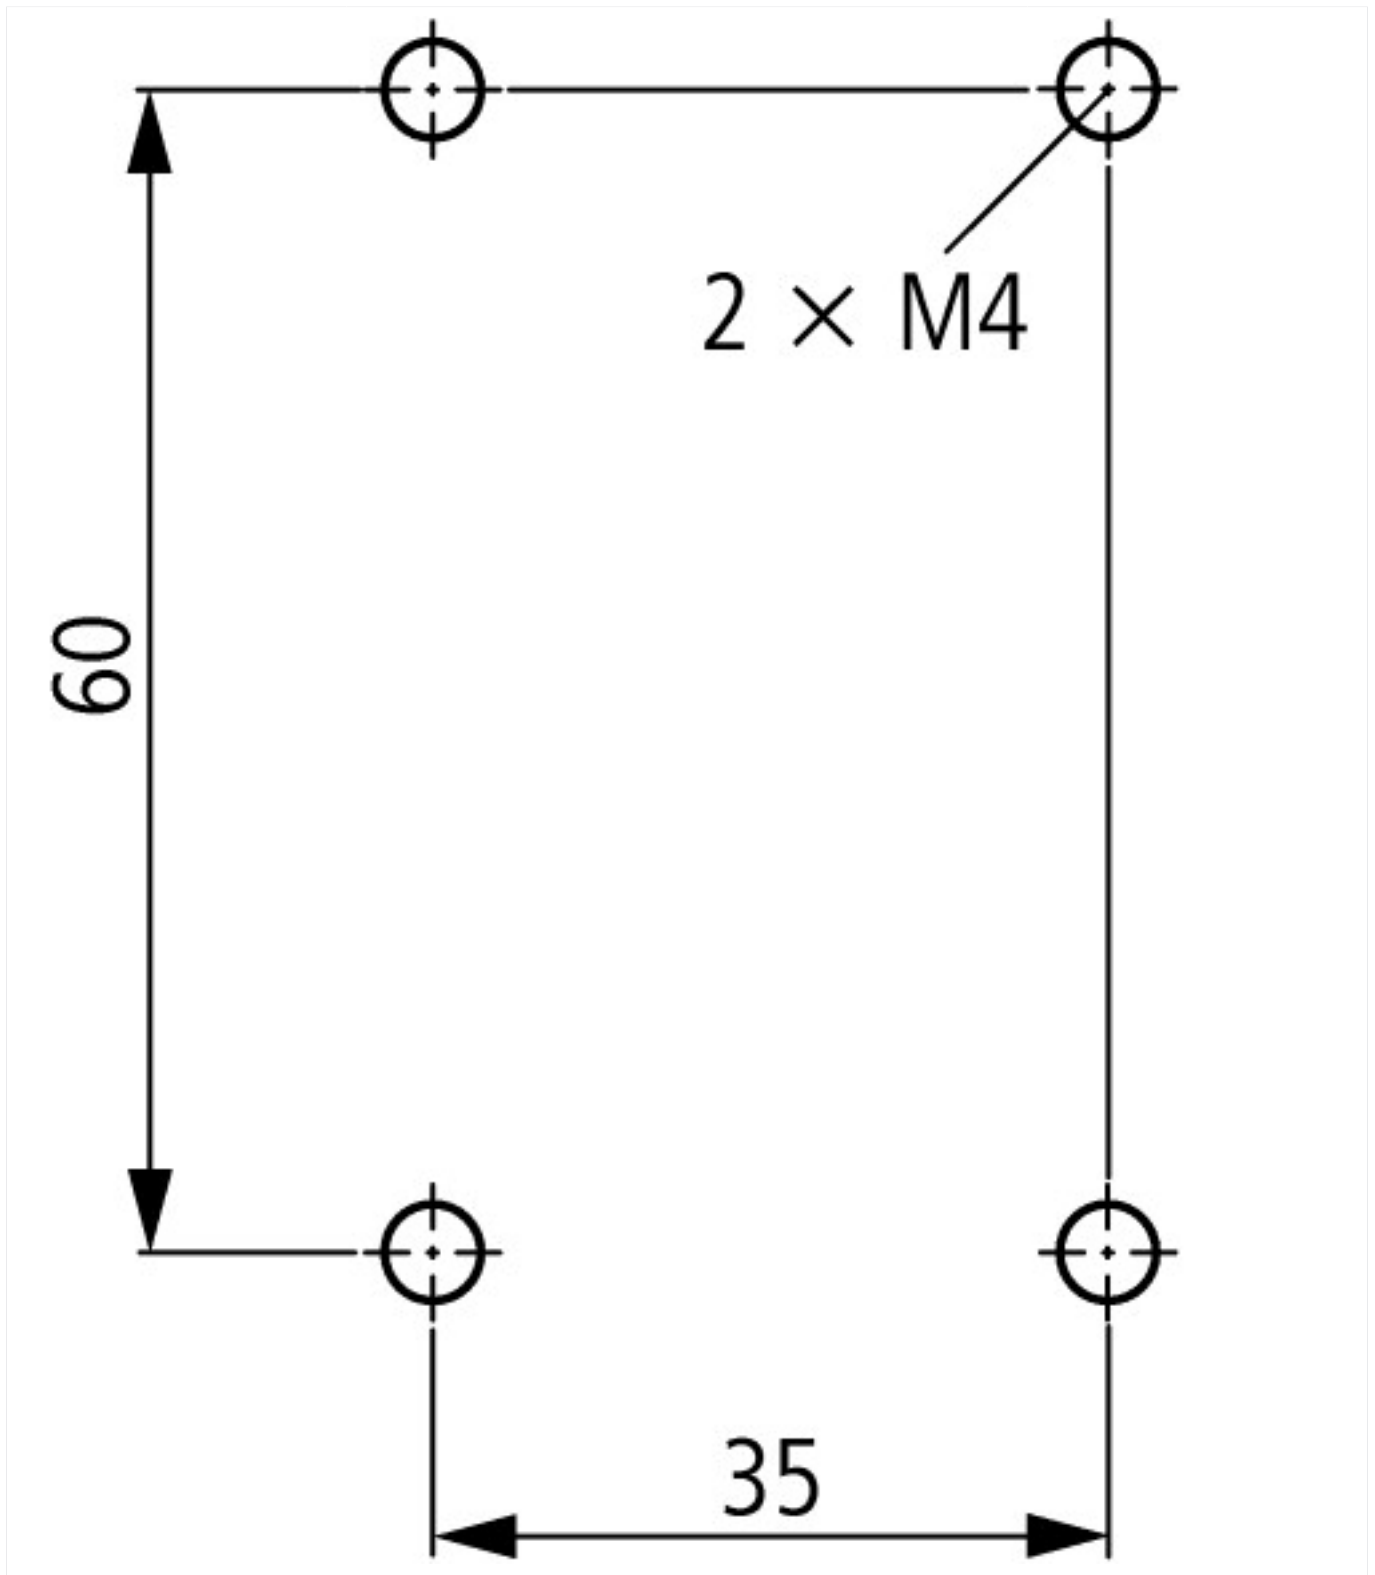

#### Additional product information (links)

|   |   |
|---|---|
| <b>IL03407013Z (AWA2100-2126) Contactors</b>                                    |   |
| IL03407013Z (AWA2100-2126)<br>Contactors  | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2012_03.pdf</a> |
|   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.84">http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.84</a>             |
|   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.85">http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.85</a>             |
|   | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.86">http://de.ecat.moeller.net/flip-cat/?edition=HPLTE&amp;startpage=5.86</a>             |
| Switchgear of Power Factor Correction Systems                                   | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>                                     |
| X-Start - New Generation:100 years of Moeller contactors - Continuous Progress- | <a href="http://www.moeller.net/binary/ver_techpapers/ver937en.pdf">http://www.moeller.net/binary/ver_techpapers/ver937en.pdf</a>                                     |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely  | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>                                     |

|  |   |
|--|---|
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions   | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a> |
| Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors          | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a> |
| Motor starters and "Special Purpose Ratings" for the North American market                     | <a href="http://www.moeller.net/binary/ver_techpapers/ver953en.pdf">http://www.moeller.net/binary/ver_techpapers/ver953en.pdf</a> |
| Switchgear for Luminaires  | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs  | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |