



Overload relay 16 - 24A

Part no.
Article no.

ZB32-24
278453





Catalog No.

XT0B024CC1



Powering Business Worldwide™

Delivery programme

| | | | |
|--|-------|---|---|
| Product range | | | Overload relay ZB up to 150 A |
| Product range | | | Accessories |
| Accessories | | | Overload relays |
| Frame size | | | ZB32 |
| Phase-failure sensitivity | | | IEC/EN 60947, VDE 0660 Part 102 |
| Description | | | Test/off button Reset pushbutton manual/auto Trip-free release |
| Mounting type | | | Direct mounting |
|  | I_r | A | 16 - 24 |
| Contact sequence | | |  |
| Auxiliary contacts | | | |
| N/O = Normally open | | | 1 N/O |
| N/C = Normally closed | | | 1 N/C |
| For use with | | | DILM17, DILM25, DILM32, DILM38, DILMF8, DILMF11, DILMF14, DILMF17, DILMF25, DILMF32, DIULM17, DIULM25, DIULM32, SDAINLM30, SDAINLM45, SDAINLM55 DS7-34...SX024... |
| Short-circuit protection | | | |
| Type "1" coordination  | gG/gL | A | 50 |
| Type "2" coordination  | gG/gL | A | 125 |

Notes

Overload release: tripping class 10 A

Short-circuit protection: Observe the maximum permissible fuse of the contactor with direct device mounting.

Suitable for protection of Ex e-motors.




II (2) GD

PTB 10 ATEX 3010

Observe manual MN03407004Z-DE/EN.


Notes

Fitted directly to the contactor

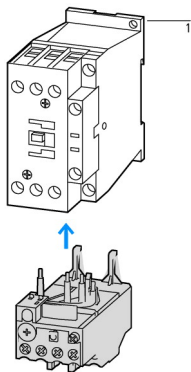

1 Contactor
2 Bases

Separate mounting

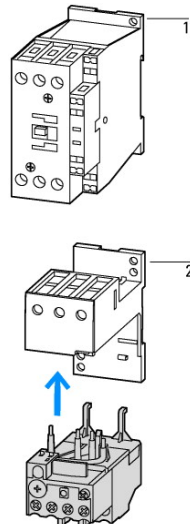

Approvals

Product Standards
UL File No.
UL CCN
CSA File No.
CSA Class No.
NA Certification
Specially designed for NA
Suitable for
Max. Voltage Rating
Degree of Protection

UL 508; CSA-C22.2 No. 14; IEC/EN 60947-4-1; IEC/EN 60947-5-1; CE marking
E29184
NKCR
12528
3211-03
UL listed, CSA certified
No
Branch circuits
600 V AC
IEC: IP20, UL/CSA Type: -

General

| | | | |
|---|--|----|--|
| Standards | | | IEC/EN 60947, VDE 0660, UL, CSA |
| Climatic proofing | | | Damp heat, constant, to IEC 60068-2-78 Damp heat, cyclic, to IEC 60068-2-30 |
| Ambient temperature | | °C | |
| | | | Operating range to IEC/EN 60947 PTB: -5 °C - +55 °C |
| Open | | °C | - 25 - 55 |
| Enclosed | | °C | - 25 - 40 |
| Temperature compensation | | | Continuous |
| Weight | | kg | 0.15 |
| Mechanical shock resistance | | g | 10 Sinusoidal Shock duration 10 ms |
| Protection type | | | IP00 |
| Protection against direct contact when actuated from front (EN 50274) | | | Finger- and back-of-hand proof |

Main conducting paths

| | | | |
|--|-----------|-----------------|----------------|
| Rated impulse withstand voltage | U_{imp} | V AC | 6000 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated insulation voltage | U_i | V | 690 |
| Rated operational voltage | U_e | V AC | 690 |
| Safe isolation to EN 61140 | | | |
| Between auxiliary contacts and main contacts | | V AC | 440 |
| Between main circuits | | V AC | 440 |
| Temperatur compensation residual error > 40 °C | | | \leq 0.25%/K |
| Current heat loss (3 conductors) | | | |
| Lower value of the setting range | | W | 2.5 |
| Maximum setting | | W | 6 |
| Terminal capacities | | mm ² | |

| | | | |
|-----------------------|--|-----------------|---|
| Solid | | mm ² | 2 x (1 - 6) |
| Flexible with ferrule | | mm ² | 2 x (1 - 4) With ferrules to DIN 46228 |
| Solid or stranded | | AWG | 14 - 8 |
| Terminal screw | | | M4 |
| Tightening torque | | Nm | 1.8 |
| Tools | | | |
| Pozidriv screwdriver | | Size | 2 |
| Standard screwdriver | | mm | 1 x 6 |

Auxiliary and control circuits

| | | | |
|---------------------------------------|------------------|-----------------|------------------|
| Rated impulse withstand voltage | U _{imp} | V | 4000 |
| Overvoltage category/pollution degree | | | III/3 |
| Terminal capacities | | mm ² | |
| Solid | | mm ² | 2 x (0.75...4) |
| Flexible with ferrule | | mm ² | 2 x (0.75 - 2.5) |
| Solid or stranded | | AWG | 2 x (18 - 12) |
| Terminal screw | | | M3.5 |
| Tightening torque | | Nm | 0.8 - 1.2 |
| Tools | | | |
| Pozidriv screwdriver | | Size | 2 |
| Standard screwdriver | | mm | 1 x 6 |
| Rated insulation voltage | U _i | V AC | 500 |
| Rated operational voltage | U _e | V AC | 500 |
| Safe isolation to EN 61140 | | | |
| between the auxiliary contacts | | V AC | 240 |
| Conventional thermal current | I _{th} | A | 6 |
| Rated operational current | I _e | A | |
| AC-15 | | | |
| Make contact | | | |
| 120 V | I _e | A | 1.5 |
| 240 V | I _e | A | |
| 230 V | I _e | A | 1.5 |
| 415 V | I _e | A | |
| 400 V | I _e | A | 0.5 |
| 500 V | I _e | A | 0.5 |
| Break contact | | | |
| 120 V | I _e | A | 1.5 |
| 240 V | I _e | A | |
| 230 V | I _e | A | 1.5 |
| 415 V | I _e | A | 0.9 |
| 415 V | I _e | A | |
| 400 V | I _e | A | 0.9 |
| 500 V | I _e | A | 0.8 |
| DC-13 L/R - 15 ms | | | |
| 24 V | I _e | A | 0.9 |
| 60 V | I _e | A | 0.75 |
| 110 V | I _e | A | 0.4 |
| 220 V | I _e | A | 0.2 |
| Short-circuit rating without welding | | | |
| max. fuse | | A gG/ gL | 6 |


Notes

Notes Ambient air temperature: Operating range to IEC/EN 60947, PTB: -5°C to +55°C
 Rated operational current: Making and breaking conditions to DC-13, time constant as stated
 Main circuits terminal capacity solid and flexible conductors with ferrules: When using 2 conductors use equal cross-sections
 See overlay "Fuses" for short-circuit strength time/current characteristic (please enquire)
 6 mm flexible with ferrules to DIN 46228
 Rated operational current DC-13, 60 V: N/O auxiliary contact 0.6 A

Technical data ETIM 4.0



| | | | |
|---|--|---|-------------------|
| Adjustable current range | | A | 16 - 24 |
| Mounting method | | | Direct attachment |
| Connection type main current circuit | | | Screw connection |
| Number of auxiliary contacts as normally closed contact | | | 1 |
| Number of auxiliary contacts as normally open contact | | | 1 |
| Number of auxiliary contacts as change-over contact | | | 0 |
| Release class | | | CLASS 10 |

Characteristics

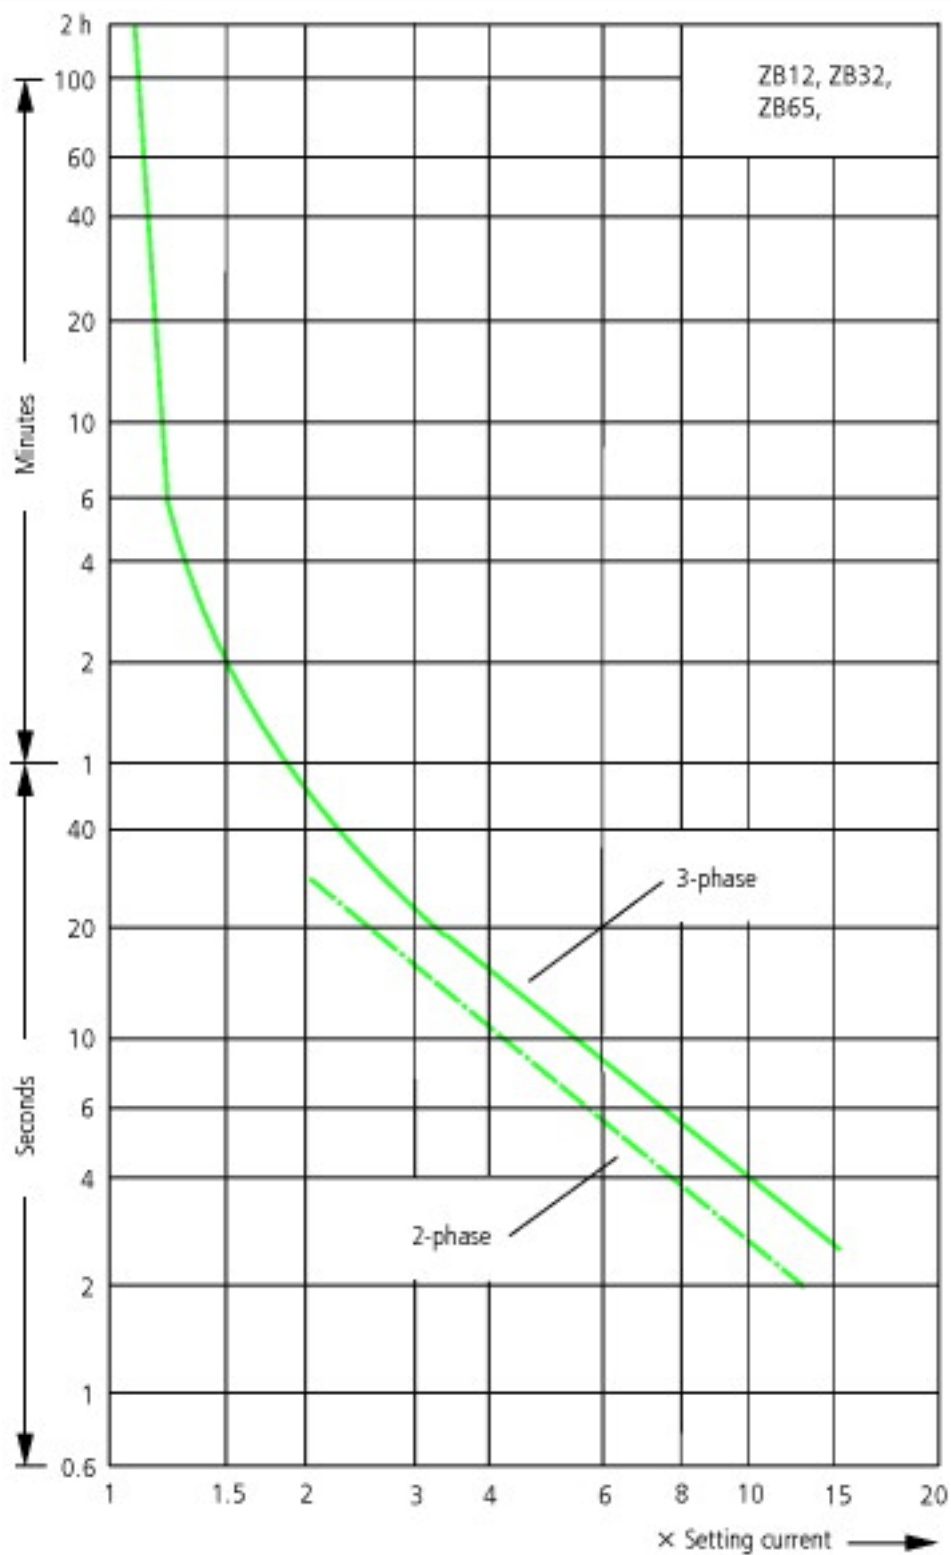

These tripping characteristics are mean values of the spread at 20 °C ambient temperature in a cold state. Tripping time depends on response current. On devices at operating temperature the tripping time of the overload relay drops to approx. 25 % of the read value. Specific characteristics for each individual setting range can be found in the manual.

Dimensions

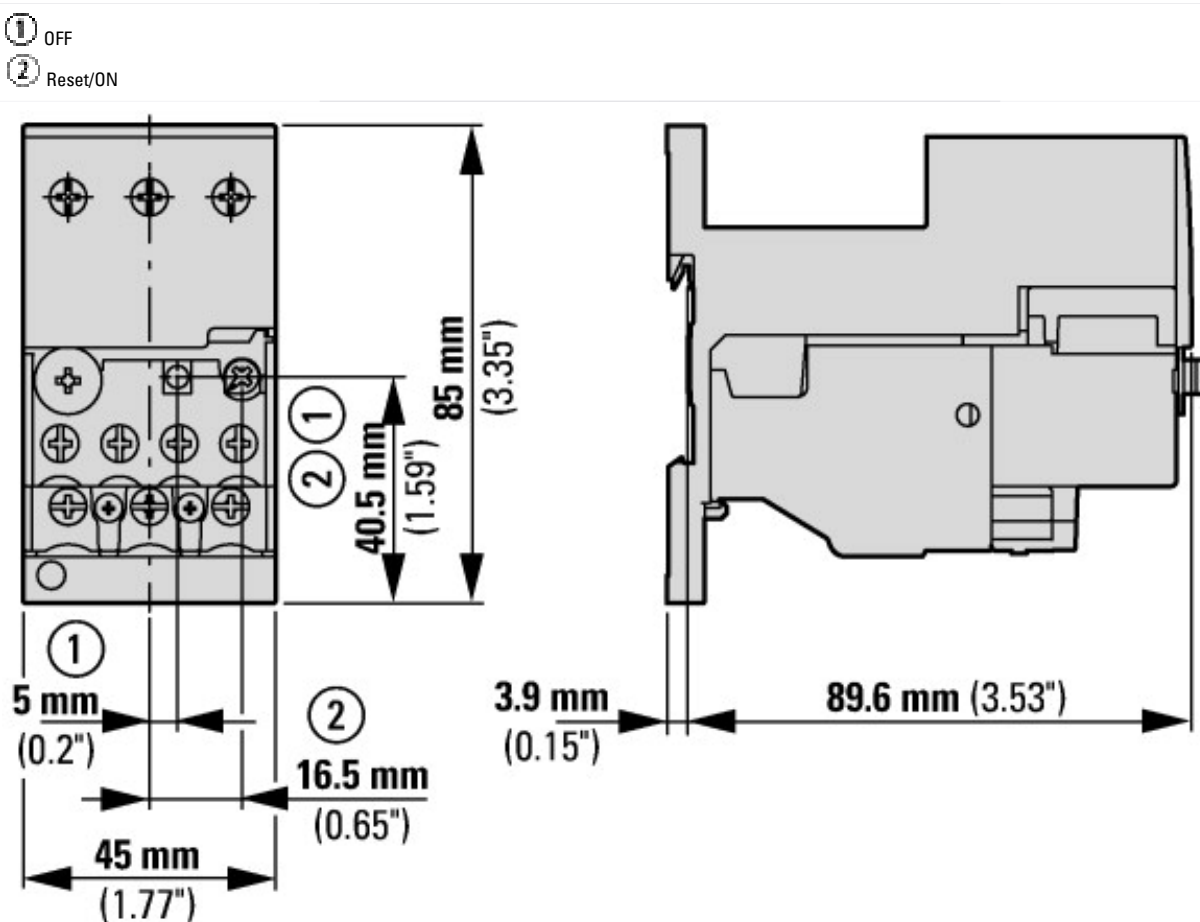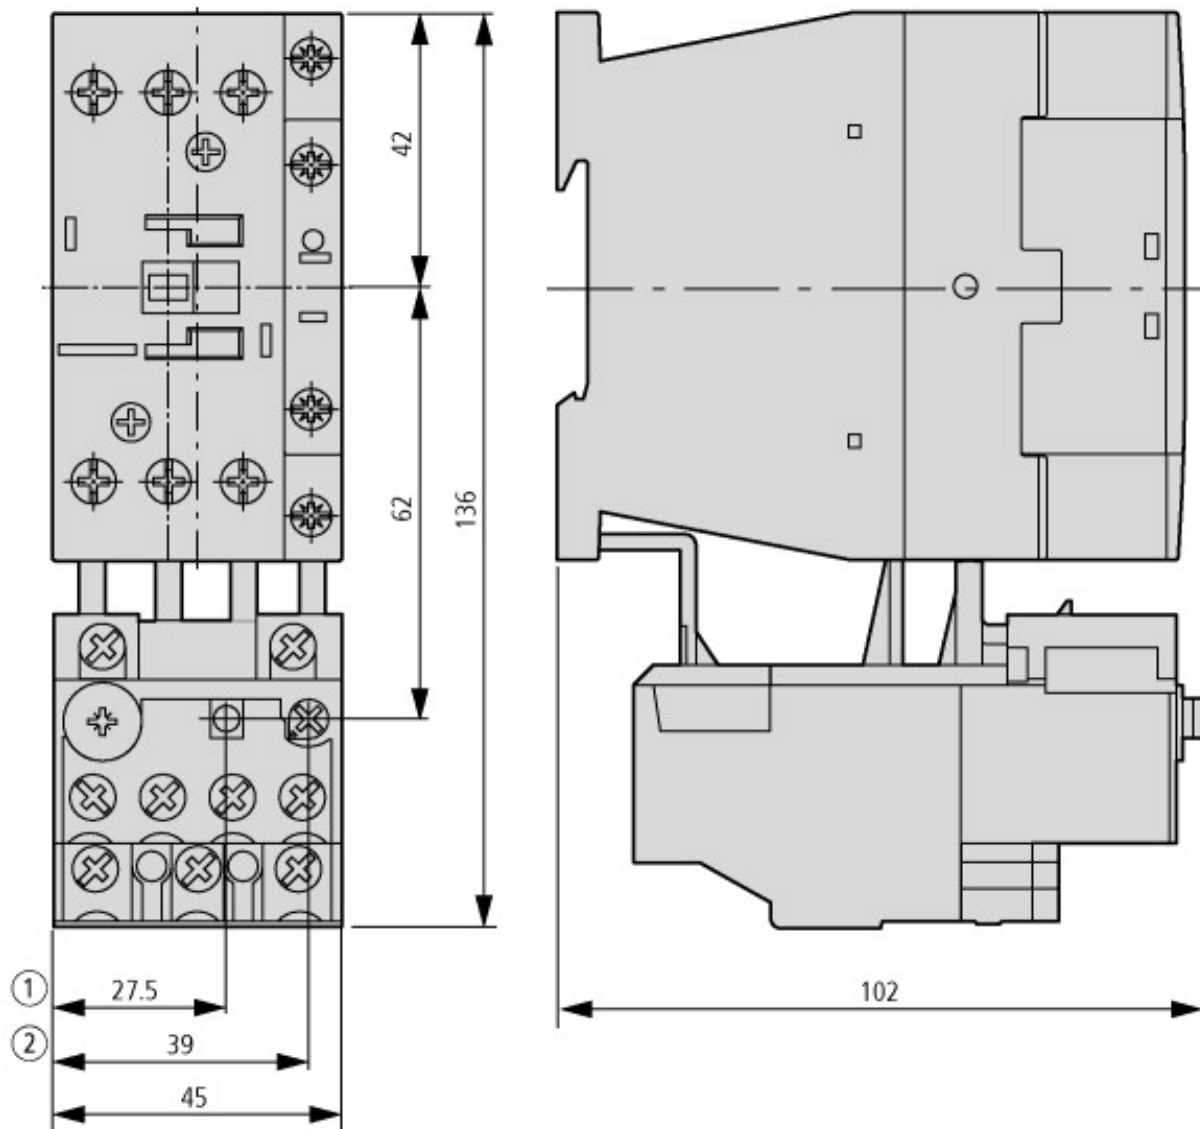

With base ZB32-XEZ

Additional product information (links)

IL03407015Z (AWA2300-2114) Overload relay

IL03407015Z (AWA2300-2114) Overload relay

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407015Z2013_01.pdf