

Incoming terminal PKZM0

Part no.
Article no.

BK25/3-PKZ0
032720

Delivery programme

Product range			Accessories
Accessories			Incoming terminal
For use with			PKZM0 PKE
Notes For three-phase commoning link, protected against accidental contact, $U_g = 690 \text{ V}$, $I_u = 63 \text{ A}$ For conductor cross-sections: 2.5 - 25 mm ² stranded 2.5 - 16 mm ² flexible with ferrules AWG 14 - 6, for use on terminals 1, 3, 5			



Approvals

Product Standards	UL 508; CSA-C22.2 No. 14; IEC60947-4-1; CE marking
UL File No.	E36332
UL CCN	NLRV
CSA File No.	12528
CSA Class No.	3211-05
NA Certification	UL listed, CSA certified
Specially designed for NA	No

Technical data ETIM 4.0

Suitable for			-
Max. conductor cross-section		mm ²	25
Width of terminal		mm	45
Busbar width		mm	0
Busbar thickness		mm	0
Suitable for flat cable connection			No
Suitable for round cable connection			YES
Suitable for sector cable connection			No
Max. rated operational current I _e		A	63

Dimensions

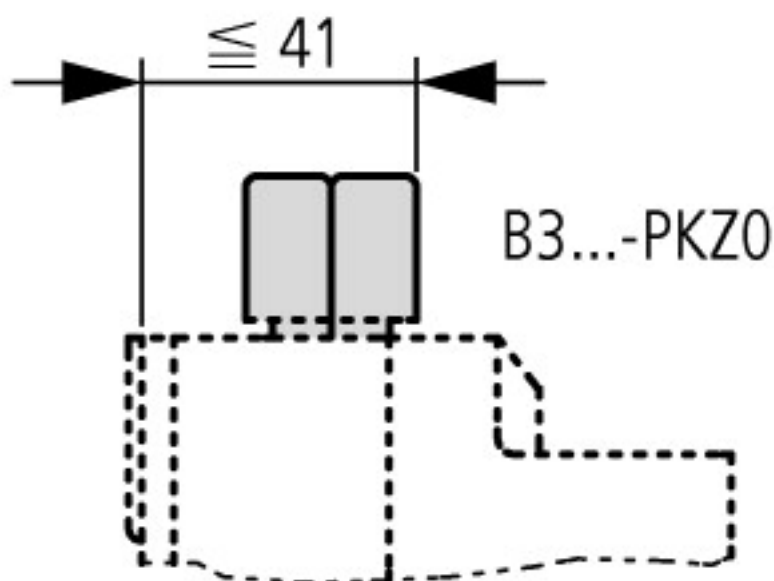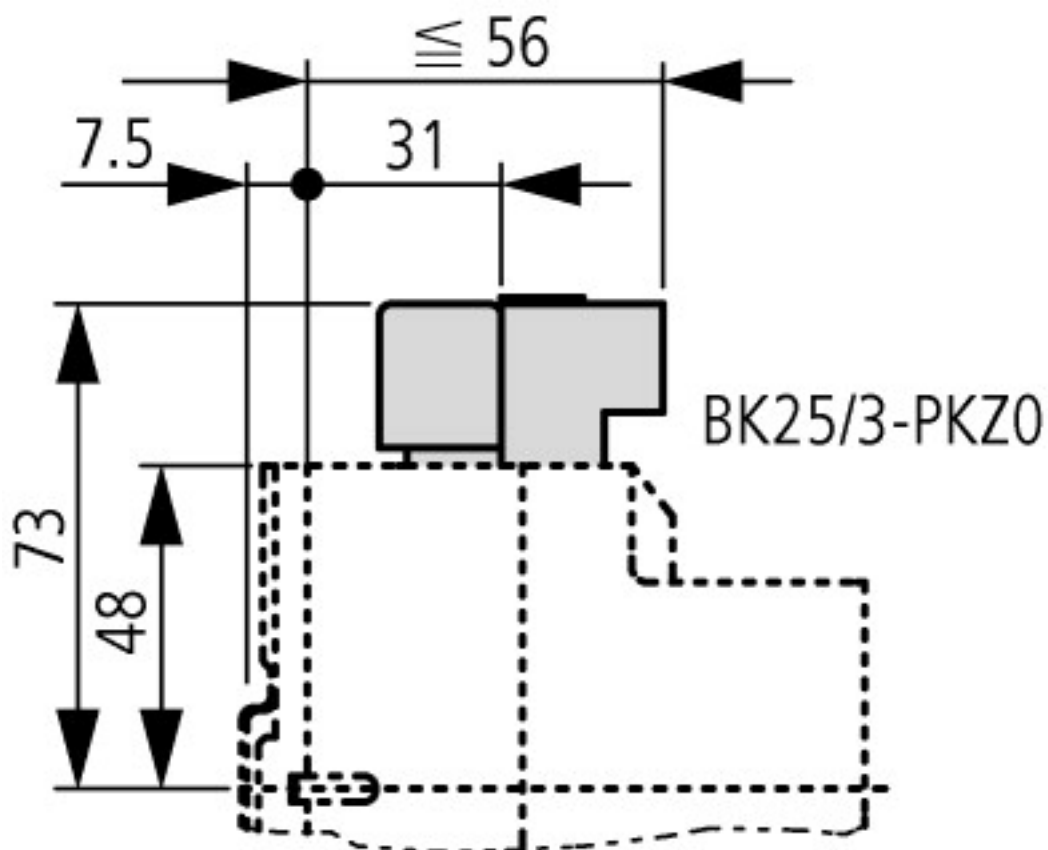

Overlapping mounting to extend the three-phase commoning link

Additional product information (links)

AWA1210-2295 Three-phase commoning link

AWA1210-2295 Three-phase commoning link

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/22950506.pdf

Motor starters and "Special Purpose Ratings" for the North American market

http://www.moeller.net/binary/ver_techpapers/ver953en.pdf

Busbar Component Adapters for modern Industrial control panels

http://www.moeller.net/binary/ver_techpapers/ver960en.pdf