



Module Finishes

All GridPro® modules featured in this brochure are available in eleven distinctive, quality finishes, with black or white inserts, excluding antique brass and black nickel finishes, which are available with black inserts only.

The GridPro® module rockers are styled to match the existing range of Click® wiring accessories to complement any existing Click® installation.

A simple code structure signifies the module colour and product finish...

GM

GridPro® Module

2001

Product

BK

Module Colour

CH

Product Finish

*UK Design Registration 3015621.



Brushed Steel*
(BS)



Polished Brass
(BR)



Stainless Steel
(SS)



Satin Brass*
(SB)



Satin Chrome*
(SC)



Polished Chrome
(CH)



Pearl Nickel
(PN)



Black
(BK)



White
(PW)



Black Nickel
(BN)



Antique Brass*
(AB)



GM2017PW



GM2017PWP



GM2017PWS



GM2017PWS



GM2017BK



GM2017BKCH



GM2017BKSC



MODULE BACK

20A Flex Outlet Module

[GM2017PW](#)

20A Flex Outlet Module - White

[GM2017BK](#)

20A Flex Outlet Module - Black

[GM2017PWCH](#)

20A Flex Outlet Module - White - Polished Chrome

[GM2017PWSC](#)

20A Flex Outlet Module - White - Satin Chrome

[GM2017PWBR](#)

20A Flex Outlet Module - White - Polished Brass

[GM2017PWP](#)

20A Flex Outlet Module - White - Pearl Nickel

[GM2017PWSB](#)

20A Flex Outlet Module - White - Satin Brass

[GM2017PWS](#)

20A Flex Outlet Module - White - Brushed Stainless

[GM2017PWS](#)

20A Flex Outlet Module - White - Stainless Steel

[GM2017BKCH](#)

20A Flex Outlet Module - Black - Polished Chrome

[GM2017BKSC](#)

20A Flex Outlet Module - Black - Satin Chrome

[GM2017BKBR](#)

20A Flex Outlet Module - Black - Polished Brass

[GM2017BKBN](#)

20A Flex Outlet Module - Black - Black Nickel

[GM2017BKPN](#)

20A Flex Outlet Module - Black - Pearl Nickel

[GM2017BKAB](#)

20A Flex Outlet Module - Black - Antique Brass

[GM2017BKSB](#)

20A Flex Outlet Module - Black - Satin Brass

[GM2017BKBS](#)

20A Flex Outlet Module - Black - Brushed Stainless


[GM2017BKSS](#)

20A Flex Outlet Module - Black - Stainless Steel


Standards: Flex Outlet Module: BS5733

Back Box Depth: 25mm Minimum **Cable Size:** 2 x 4mm, 4 x 2.5mm, 1 x 6mm

DIMENSIONS (mm)

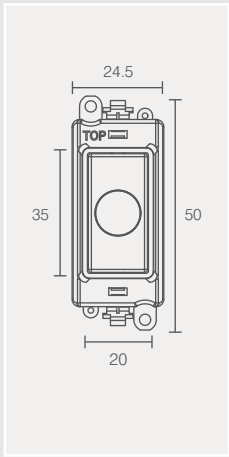

TYPICAL WIRING DIAGRAM

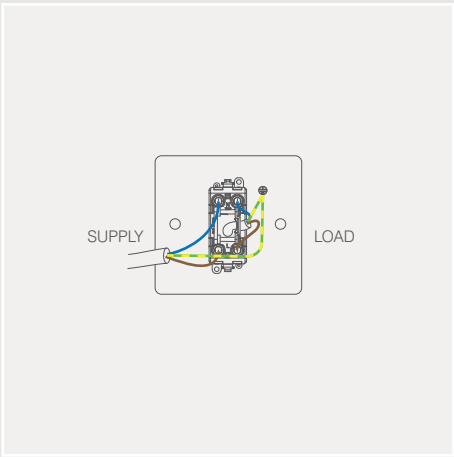

Material Composition	Module Front: Urea or Urea + Stainless Steel Cover (Ingot) Cover, Insert & Rear Housing: Nylon Terminals: Brass Terminal Screws: Steel & Yellow Passivated
Voltage	250V ~ 50Hz
Current Rating	20A
Terminal Size	5mm Ø
Torque Value	1.2Nm
Cable Size	2 x 4mm ² , 3 x 2.5mm ² or 1 x 6mm ²
Back Box Depth	25mm - 47mm (Deco [™] , Deco Plus, Mode [™] , Polar [™]) 35mm - 47mm (Define [™] , Definity [™])
Modular	Yes
Warranty	10 Years
Anti Microbial Certified	Yes (Non Ingot Modules Only)
IP Rating	IP20
Operational Temperature	-5°C to +40°C
Standards	The Low Voltage Directive 2014/35/EU BS 5733: 2010

Additional Information:
Ensure that the mains supply is isolated before commencing installation and refer to the circuit diagram supplied with the relevant product. These products are rated at 20A; therefore all terminals should not exceed the stated amperage.
Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
All white moulded accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products were independently tested and achieved a 99.9% kill rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella, and Klebsiella Pneumoniae.