


Fully adjustable assembly

 Fit and secure appropriate Back Box and Yoke with tabs removed. Pull the cable through Yoke and strip insulation accordingly. Ensure an earth connection between frame and Yoke (if required). The fixing screws are backed off to allow adjustment for Yoke.



- 2. Systematically terminate cables into each module. Clip modules into Yoke with a pivot motion.
- 3. Attach the Frontplate using the fixing screws provided. The Yokes containing the modules sit behind the Frontplate until the captive fixing screws tighten up and pull them forward into place.

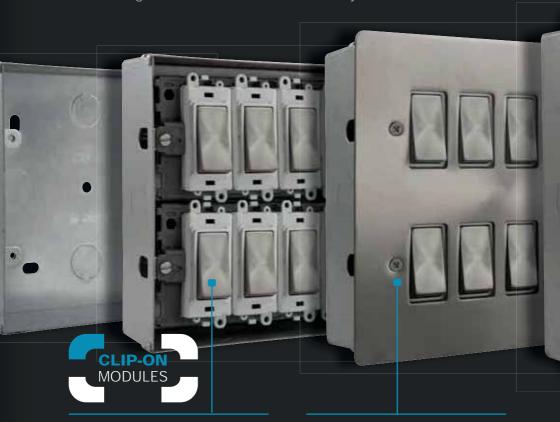

essentials* define*



4. The position of the Frontplate in relation to the wall can be adjusted by the captive fixing screws. If the Back Box is not recessed level with the wall then the Yoke will adjust so that the Frontplate mounts flush to the wall.


To accommodate

Metal Clad and Define®

Frontplates there is an adjustment in the

Yoke feature.

GRIDPRO



define[®]

For more information on Back Boxes and Yokes see from page 117.

Define® 18 Gang GridPro® Frontplates

FPCH20518 18 Gang GridPro® Frontplate - Polished Chrome FPBN20518 18 Gang GridPro® Frontplate - Black Nickel FPPN20518 18 Gang GridPro® Frontplate - Pearl Nickel 18 Gang GridPro® Frontplate - Brushed Stainless FPBS20518 FPSS20518 18 Gang GridPro® Frontplate - Stainless Steel





Back Box Depth: 56mm Minimum Cable Size: Dependant on module used Dimensions: 196mm x 206mm x 1.3mm *Excluding gasket

Understanding the code:

FP - Plate Style BN - Plate Finish 20518 - Product No.

CH Polished Chrome, BN Black Nickel, PN Pearl Nickel, BS Brushed Steel, SS Stainless Steel.