

AURORA®

www.aurora.eu.com/firerated

SOLA®

FIRE RATED DOWNLIGHTING

***“Safe, energy saving solutions for
TODAY's lighting requirements”***



NEW AU-DLM841
240V 13W SGU10

NEW AU-DLM843
240V 13W SGU10

NEW AU-DLT222
240V 13W GX53



powered by **LUNA®**
SGU10 & GX53
40 Lumens p/W lamps

13W GX53



13W SGU10



EUROPEAN HEAD OFFICE

Aurora Limited
16 Alban Park, Hatfield Road
St. Albans, Hertfordshire
United Kingdom, AL4 0JJ
e-mail: info@aurora.eu.com
Tel: +44 (0) 870 444 11 06
Fax: +44 (0) 870 444 11 07

USA SALES & DISTRIBUTION

Aurora Lighting Inc.
Suite 100
19329 US Highway 19 N
Clearwater, Florida 33764, USA
e-mail: info@aurora.us.com
Tel: +1 (727) 524 4270
Fax: +1 (727) 524 4271


INTERNATIONAL SALES

Aurora International Lighting Corp.
No. 172 Ta Lung Road
Taichung, Taiwan 407
Republic Of China
e-mail: sales@aurorachina.com
Tel: +886 (4) 231 090 46
Fax: +886 (4) 231 090 47

SOLA® & LUNA®
Aurora brands

FEATURES AND BENEFITS

- REGISTERED COMMUNITY DESIGN
- UK PATENT GB2426321
- F-MARK
- INTEGRATED INTUMESCENT MATERIAL
- MAINTAINS THE CEILING FIRE BARRIER INTEGRITY
- MAINTAINS THE CEILING ACOUSTIC PROPERTIES
- MAINTAINS THE DWELLINGS AIR LEAKAGE REQUIREMENTS
- SIMPLE & VERSATILE INSTALLATION
- FULL RANGE OF COMPATIBLE ACCESSORIES

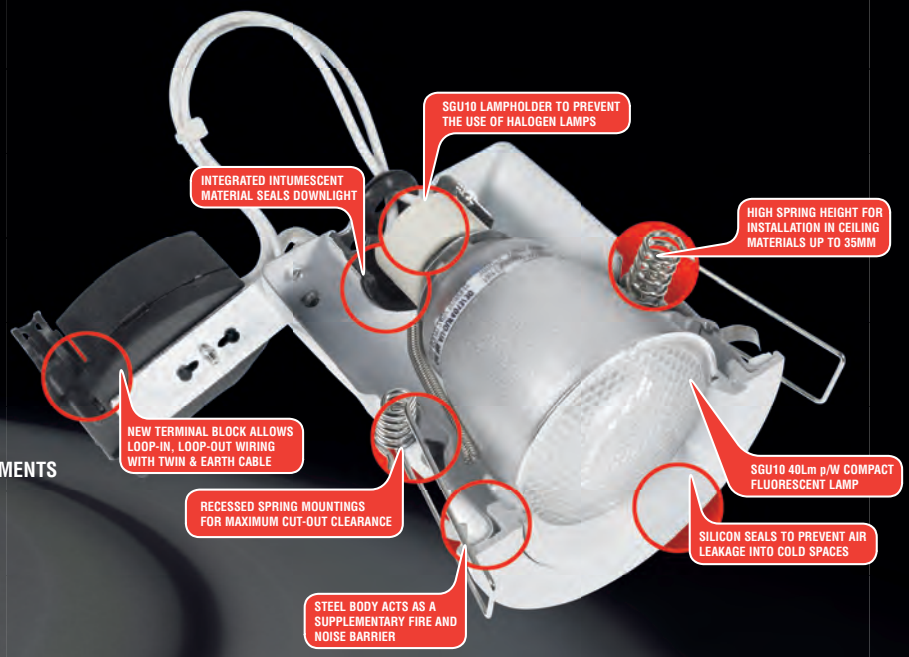

NEW AU-DLM841

240V 13W SGU10



Cat.No.	Model	Watts	Base	Lumens	Input	Overall [Ø]	Cutout [Ø]	Recess	Horz.Adj.
AU-DLM841*	Fixed	13W	SGU10	520	240V	100mm	90mm	130mm	N/A
AU-DLM842*	Adjust	13W	SGU10	520	240V	110mm	100mm	147mm	15°
AU-DLM843*	IP65	13W	SGU10	520	240V	100mm	85mm	130mm	N/A



NEW AU-DLT222

240V 13W GX53



Cat.No.	Model	Watts	Base	Lumens	Input	Overall [Ø]	Cutout [Ø]	Recess	Horz.Adj.
AU-DLT221*	Fixed	13W	GX53	520	240V	130mm	115mm	115mm	N/A
AU-DLT222*	Adjust	13W	GX53	520	240V	140mm	125mm	120mm	15°
AU-DLT225*	IP65	13W	GX53	520	240V	130mm	115mm	115mm	N/A



NEW AU-DLL993

12V 50W MR16



Cat.No.	Model	Watts	Base	Input	Overall [Ø]	Cutout [Ø]	Recess	Horz.Adj.
AU-DLL991*	Fixed	50W	MR16	12V	85mm	75mm	139mm	N/A
AU-DLL992*	Adjust	50W	MR16	12V	95mm	85mm	144mm	30°
AU-DLL993*	IP65	50W	MR16	12V	86mm	72mm	145mm	N/A



NEW AU-DLL691


12V 35W MR11



Cat.No.	Model	Watts	Base	Input	Overall [Ø]	Cutout [Ø]	Recess	Horz.Adj.
AU-DLL691*	Fixed	35W	MR11	12V	64mm	50mm	115mm	N/A
AU-DLL692*	Adjust	35W	MR11	12V	75mm	60mm	115mm	15°
AU-DLL693*	IP65	35W	MR11	12V	72mm	55mm	115mm	N/A



*Add suffix W, MW¹, PB, PC, SN or SS² to catalogue number for these available finishes:



¹Available with AU-DLL991/992/993 only

²Available with AU-DLL691/692/693 & AU-DLL991/992/993 only

AURORA[®]

For full range of Aurora Fire Rated downlights please see Aurora V1 Fire Rated catalogue or visit our website:

www.aurora.eu.com/firerated