


# BLC Pew Heaters



BLC-300B

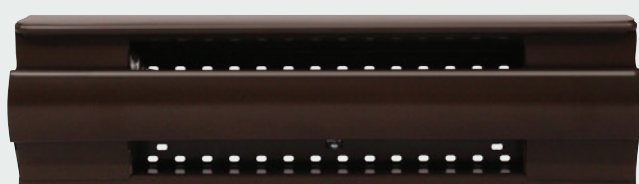

BLC-500B



BLC-750B

BLC Series - ideal for unobtrusive installation under a church pew

- An economic means of heating a church congregation
- Minimal pre-heating required ensuring low running costs
- Visually unobtrusive

## Features

- Robust all-steel construction
- Dark brown paint finish
- Fixed directly to a pew's backboard or mounted on floor or suspension brackets
- Optional guards available

## Heater Range

Model	Length (mm)	kW
BLC-300	566	0.3
BLC-500	691	0.5
BLC-750	945	0.75

## Heater Technical Data

Model	kW	Volts	Dimensions (mm)			Weight (kg)
			L	D	H	
BLC-300	0.3	230	566	62	148	3.0
BLC-500	0.5	230	691	62	148	4.0
BLC-750	0.75	230	945	62	148	5.0



BLC with guard installed under a choir stall in a Somerset church



BLC-EXG6 optional safety guard can be retro-fitted



BLC-HB optional suspension brackets for BLC range

BLC-FB Floor Mounting Brackets - For use where pews do not have a conventional back-board




## Optional Accessories

Type	Description	Model
Guard	For BLC-300 610 x 135 x 160	BLC-EXG6
Guard	For BLC-500 740 x 135 x 160	BLC-EXG7
Guard	For BLC-750 1020 x 135 x 160	BLC-EXG10
Bracket	Floor (pair) assembled height 153mm	BLC-FB
Bracket	Suspension (pair) assembled height 234mm	BLC-HB

## Pew Heater Section Table

Space Between Seat Supports (mm)		Recommended Heater
Minimum	Maximum	
650	750	BLC-300
750	1000	BLC-500
1000	1500	BLC-750
1500+		Multiple Heaters

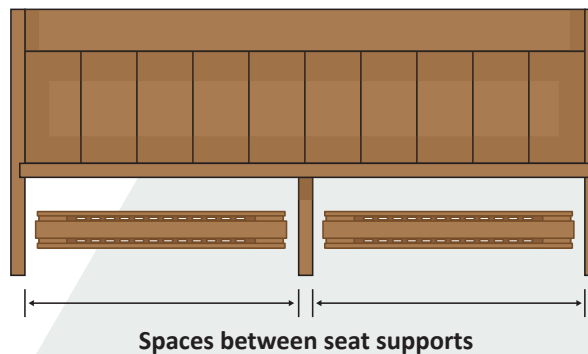

Pew heaters installed in a Worcestershire church



BLC heaters installed under pews in St Bartholomew's Church Notgrove



Pew heaters with suspension brackets and guards