



OUTDOOR LIGHTING



The Fumagalli collection of high quality outdoor lighting products provides the ultimate 'fix and forget' solution to a host of outdoor lighting requirements.

The MODERN range provides a contemporary alternative to the long established traditional style of fittings which have proved so popular with installers across the World over many years.

The unique resin formulation used in all Fumagalli products allows us to offer a lifetime guarantee against corrosion. No matter what the installation - public parks, shopping arcades, children's play areas or even seaside promenades - Fumagalli outdoor lighting products are designed to last regardless of the environment.

Manufactured in a modern, state-of-the-art production facility in Northern Italy Fumagalli lighting products are produced using only the highest quality raw materials and components.


The special resin formulation is self-coloured, and UV stabilised. This means that these fittings are virtually maintenance free and will not discolour or fade, even in the brightest sunlight. This unique construction allows us to offer an unconditional lifetime warranty against corrosion.

Public safety has also been taken fully into account - all fittings are fire resistant and double insulated.

RESIN MATERIAL ADVANTAGES



MAINTENANCE

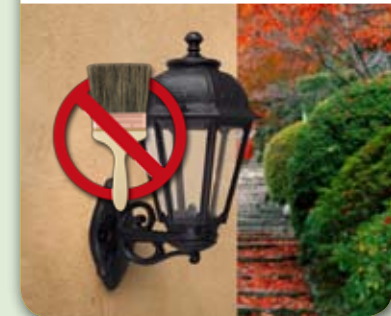

ANTI-CORROSION



DOUBLE INSULATION



NOT AFFECTED BY CHEMICAL FERTILIZERS



UV-RAY STABILIZED



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Clear (X) Opal (Y)

LED Lamps



Power (W)
110/240 V
50/60 Hz

11w **28w** **40w**

Luminous Flux

900Lm **2800Lm** **4000Lm**

Colour Temperature (K)

4.000K (daylight white)
3.000K (warm white)

Lifetime (Hours)

25.000h

LED modules details at pag. 52-53



NEW PRODUCT 2015!



GX53 LED:
LAMP INCLUDED




GX53 LED:
LAMP INCLUDED

GIUSEPPE




Power	Socket	4000K Ref. code	3000K Ref. code
11W LED	GX53	4P1.000.B1L	4P1.000.B1R
11W LED	GX53	4P1.000.BSL	4P1.000.BSR
4x 7W 28W LED	GX53	4P2.000.C4L	4P2.000.C4R
4x 10W 40W LED	GX53	4P2.000.D4L	4P2.000.D4R



GABRI/GIUSEPPE 1L




Power	Socket	4000K Ref. code	3000K Ref. code
11W LED	GX53	4P1.613.010.B1L	4P1.613.010.B1R
11W LED	GX53	4P1.613.010.BSL	4P1.613.010.BSR
4x 7W 28W LED	GX53	4P2.613.010.C4L	4P2.613.010.C4R
4x 10W 40W LED	GX53	4P2.613.010.D4L	4P2.613.010.D4R



GABRI/GIUSEPPE 2L



Power	Socket	4000K Ref. code	3000K Ref. code
11W LED	GX53	4P1.613.020.B1L	4P1.613.020.B1R
11W LED	GX53	4P1.613.020.BSL	4P1.613.020.BSR
4x 7W 28W LED	GX53	4P2.613.020.C4L	4P2.613.020.C4R
4x 10W 40W LED	GX53	4P2.613.020.D4L	4P2.613.020.D4R

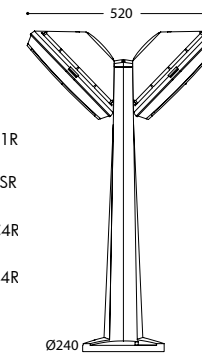

* WITH MOTION SENSOR 220-240V



Resin body



PMMA diffuser



LED Lamps



Power (W)
110/240 V
50/60 Hz

11w
100W INCANDESCENT

28w
100W HOISON

40w
150W HOISON

Luminous Flux

900Lm **2800Lm** **4000Lm**

Colour Temperature (K)

4.000K (daylight white)
3.000K (warm white)

Lifetime (Hours)

25.000h

LED modules details at pag. 52-53



NEW PRODUCT 2015!




GX53 LED: LAMP INCLUDED






GX53 LED: LAMP INCLUDED

GIOVA/GIUSEPPE



Power	Socket	4000K Ref. code	3000K Ref. code
11W LED	GX53	4P1.702.B1L	4P1.702.B1R
11W LED	GX53	4P1.702.BSL	4P1.702.BSR
4x 7W 28W LED	GX53	4P2.702.C4L	4P2.702.C4R
4x 10W 40W LED	GX53	4P2.702.D4L	4P2.702.D4R



*) WITH MOTION SENSOR 220-240V

COMING SOON

GIUSEPPE POST VERSION




NEWS 2015

Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)



GX53 LED:
LAMP INCLUDED



NEW EMERGENCY VERSION
more details
www.fumagalli.it



1B3.000.EM1

	Bertina lamps			Berta-Umberta lamps
LED Lamps				
Power (W)	3w	7w	10w	11w
110/240 V 50/60 Hz				
Luminous Flux	350 Lm	700 Lm	1000 Lm	900 Lm
Colour Temperature (K)	4.000K (daylight white)			3.000K (warm white)
Lifetime (Hours)	25.000h			


LED modules details at pag.52-53

BERTINA



NEW NO SCREWS AT SIGHT

Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	1B1.000.G1L	1B1.000.G1R
7W LED	GX53	1B1.000.C1L	1B1.000.C1R
10W LED	GX53	1B1.000.D1L	1B1.000.D1R




BERTA



NEW NO SCREWS AT SIGHT

Power	Socket	4000K Ref.code	3000K Ref. code
11W LED	GX53	1B2.000.B1L	1B2.000.B1R
Max 160mm	E27	1B2.000.P27	




UMBERTA



NEW NO SCREWS AT SIGHT

Power	Socket	4000K Ref.code	3000K Ref. code
11W LED	GX53	1B3.000.B1L	1B3.000.B1R
11W LED	GX53	1B3.000.BSL	1B3.000.BSR
	E27	1B3.000.E27	
	2xE27	1B3.000.E28	
	E27	1B3.000.ES7	
	2xE27	1B3.000.ES8	

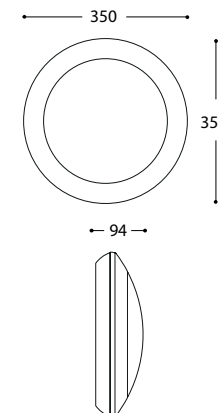


*) WITH MOTION SENSOR
220-240V

MADE IN ITALY

Resin body

Grey (L) White (W) Black (A)



LED Lamp



GU10 LED

Power (W)
110/240 V
50/60 Hz

4,5W
= (35W)

Luminous Flux

300 Lm
75 lm/W

Colour Temperature (K)

4.000K
3.000K

Lifetime (hours)

25.000h

LED modules details at pag. 52-53



**GU10 LED:
LAMP INCLUDED**



PC diffuser




MINITOMMY

Power Socket 4000K Ref.code 3000K Ref. code



	4,5W LED	GU10	1M1.000.U1L	1M1.000.U1R
--	-----------------	------	-------------	-------------



MINITOMMY SPIKE

Power Socket 4000K Ref.code 3000K Ref. code


	4,5W LED	GU10	1M1.001.U1L	1M1.001.U1R
--	-----------------	------	-------------	-------------

MINITOMMY-EL

Power Socket 4000K Ref.code 3000K Ref. code



	4,5W LED	GU10	1M2.000.U1L	1M2.000.U1R
--	-----------------	------	-------------	-------------



MINITOMMY-EL SPIKE

Power Socket 4000K Ref.code 3000K Ref. code


	4,5W LED	GU10	1M2.001.U1L	1M2.001.U1R
--	-----------------	------	-------------	-------------

MINITOMMY 2L

Power Socket 4000K Ref.code 3000K Ref. code



	2x4,5W LED	GU10	3M1.000.U2L	3M1.000.U2R
--	-------------------	------	-------------	-------------



MINITOMMY 2L SPIKE

Power Socket 4000K Ref.code 3000K Ref. code


	2x4,5W LED	GU10	3M1.001.U2L	3M1.001.U2R
--	-------------------	------	-------------	-------------

MINITOMMY-EL 2L

Power Socket 4000K Ref.code 3000K Ref. code



	2x4,5W LED	GU10	3M2.000.U2L	3M2.000.U2R
--	-------------------	------	-------------	-------------






MINITOMMY-EL 2L SPIKE

Power Socket 4000K Ref.code 3000K Ref. code


	2x4,5W LED	GU10	3M2.001.U2L	3M2.001.U2R
--	-------------------	------	-------------	-------------

Resin body

Grey (L) White (W) Black (A)

LED Lamps	 GX53 LED	 GX53 LED	 GX53 LED
Power (W) 110/240 V 50/60 Hz	3w <small>(40W)</small>	7w <small>(75W)</small>	10w <small>(100W)</small>
Luminous Flux	350Lm	700Lm	1000Lm
Colour Temperature (K)	4.000K (daylight white)		
	3.000K (warm white)		
Lifetime (Hours)	25.000h		

LED modules details at pag. 52-53



PC diffuser

FROSTED (X)

GREEN (N)

BLUE (U)

ORANGE (R)


GX53 LED: LAMP INCLUDED



NEW SQUARE SHAPE







TOMMY-SQ

Power	Socket	4000K Ref. code	3000K Ref. code
 3W LED	GX53	5M1.000.G1L	5M1.000.G1R
 7W LED		5M1.000.C1L	5M1.000.C1R
 10W LED		5M1.000.D1L	5M1.000.D1R



TOMMY-SQ SPIKE

Power	Socket	4000K Ref. code	3000K Ref. code
 3W LED	GX53	5M1.001.G1L	5M1.001.G1R
 7W LED		5M1.001.C1L	5M1.001.C1R
 10W LED		5M1.001.D1L	5M1.001.D1R





TOMMY EL

Power	Socket	4000K Ref. code	3000K Ref. code
 3W LED	GX53	2M2.000.G1L	2M2.000.G1R
 7W LED		2M2.000.C1L	2M2.000.C1R
 10W LED		2M2.000.D1L	2M2.000.D1R



TOMMY EL SPIKE

Power	Socket	4000K Ref. code	3000K Ref. code
 3W LED	GX53	2M2.001.G1L	2M2.001.G1R
 7W LED		2M2.001.C1L	2M2.001.C1R
 10W LED		2M2.001.D1L	2M2.001.D1R




TOMMY

Power	Socket	4000K Ref. code	3000K Ref. code
 3W LED	GX53	2M1.000.G1L	2M1.000.G1R
 7W LED		2M1.000.C1L	2M1.000.C1R
 10W LED		2M1.000.D1L	2M1.000.D1R






TOMMY SPIKE

Power	Socket	4000K Ref. code	3000K Ref. code
 3W LED	GX53	2M1.001.G1L	2M1.001.G1R
 7W LED		2M1.001.C1L	2M1.001.C1R
 10W LED		2M1.001.D1L	2M1.001.D1R




Resin body

Grey (L) White (W) Black (A)

LED Lamps	 GX53 LED	 GX53 LED	 GX53 LED
Power (W) 110/240 V 50/60 Hz	3w <small>(40W)</small>	7w <small>(75W)</small>	10w <small>(100W)</small>
Luminous Flux	350Lm	700Lm	1000Lm
Colour Temperature (K)	4.000K (daylight white)		
	3.000K (warm white)		
Lifetime (Hours)	25.000h		



LED modules details at pag. 52-53






NEW SQUARE SHAPE




TOMMY-SQ 2L




Power	Socket	4000K Ref. code	3000K Ref. code
 2x3W LED	GX53	6M1.000.G2L	6M1.000.G2R
 2x7W LED		6M1.000.C2L	6M1.000.C2R
 2x10W LED		6M1.000.D2L	6M1.000.D2R

TOMMY-SQ 2L SPIKE




Power	Socket	4000K Ref. code	3000K Ref. code
 2x3W LED	GX53	6M1.001.G2L	6M1.001.G2R
 2x7W LED		6M1.001.C2L	6M1.001.C2R
 2x10W LED		6M1.001.D2L	6M1.001.D2R




TOMMY EL




Power	Socket	4000K Ref. code	3000K Ref. code
 2x3W LED	GX53	4M2.000.G2L	4M2.000.G2R
 2x7W LED		4M2.000.C2L	4M2.000.C2R
 2x10W LED		4M2.000.D2L	4M2.000.D2R

TOMMY EL SPIKE




Power	Socket	4000K Ref. code	3000K Ref. code
 2x3W LED	GX53	4M2.001.G2L	4M2.001.G2R
 2x7W LED		4M2.001.C2L	4M2.001.C2R
 2x10W LED		4M2.001.D2L	4M2.001.D2R




TOMMY 2L

Power	Socket	4000K Ref. code	3000K Ref. code
 2x3W LED	GX53	4M1.000.G2L	4M1.000.G1R
 2x7W LED		4M1.000.C2L	4M1.000.C2R
 2x10W LED		4M1.000.D2L	4M1.000.D2R

TOMMY 2L SPIKE

Power	Socket	4000K Ref. code	3000K Ref. code
 2x3W LED	GX53	4M1.001.G2L	4M1.001.G2R
 2x7W LED		4M1.001.C2L	4M1.001.C2R
 2x10W LED		4M1.001.D2L	4M1.001.D2R



Resin body



White (W) Black (A)

PMMA diffuser




Clear (X) Opal (Y)



BISSO/ANNA




	Power	Socket	Ref. code
 MAX 160mm	-	E27	E22.131.E27



MIKROLOT/ANNA




	Power	Socket	Ref. code
 MAX 160mm	-	E27	E22.110.E27



SICHEM/ANNA




	Power	Socket	Ref. code
 MAX 160mm	-	E27	E22.120.E27



IESSE



	Power	Socket	Ref. code
 MAX 160mm	-	E27	M22.000.E27



Resin body



White (W) Black (A)

PMMA diffuser




Clear (X) Opal (Y)



MIZAR/ANNA




Power	Socket	Ref. code
MAX 160mm	E27	E22.151.E27



ARTU'/ANNA




Power	Socket	Ref. code
MAX 160mm	E27	E22.158.E27



GIGI BISSO/ANNA 2L




Power	Socket	Ref. code
MAX 160mm	E27	E22.156.S20.E27

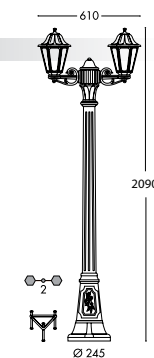

GIGI BISSO/ANNA 3L



Power	Socket	Ref. code
MAX 160mm	E27	E22.156.S30.E27

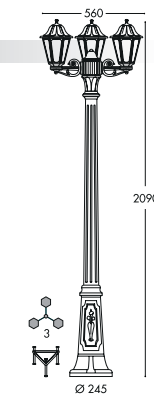

Resin body



White (W) Black (A)

PMMA diffuser



Clear (X) Opal (Y)



GIGI/RUT



Power


-

Socket

E27

Ref.code

E26.156.E27



RICU/RUT



Power


-

Socket

E27

Ref.code

E27.157.E27



EXCLUSIVE TECHNOLOGY
STEEL POST COVERED BY RESIN

STEEL STRUCTURE

EXPANSE

OUTER RESIN



Resin body

Grey (L) Black (A)

LED Lamp



GU10 LED

Power (W) **4,5W**
110/240 V
50/60 Hz

Luminous Flux **300 Lm**
75 lm/W

Colour Temperature (K) **4.000K**
3.000K

Lifetime (hours) **25.000h**

LED modules details at pag. 52-53



GU10 LED:
LAMP INCLUDED





PC diffuser



CECI 90





Power	Socket	4000K Ref. code	3000K Ref. code
4,5W LED	GU10	1F1.000.U1L	1F1.000.U1R



CECI 90-2L




Power	Socket	4000K Ref. code	3000K Ref. code
4,5W LED	GU10	1F2.000.U1L	1F2.000.U1R



CECI 90-3L





Power	Socket	4000K Ref. code	3000K Ref. code
4,5W LED	GU10	1F3.000.U1L	1F3.000.U1R



CECI 90 SQUARE



Power	Socket	4000K Ref. code	3000K Ref. code
4,5W LED	GU10	1F4.000.U1L	1F4.000.U1R



Resin body



LED Lamp



Power (W)
110/240 V
50/60 Hz

3W
= (40W)

Luminous Flux

350 Lm
115 lm/W

Colour Temperature (K)

4.000K
3.000K

Lifetime (Hours)

25.000h

LED modules details at pag. 52-53



GX53 LED:
LAMP INCLUDED





PC diffuser



CECI 120





Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2F1.000.G1L	2F1.000.G1R



CECI 120-2L





Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2F2.000.G1L	2F2.000.G1R



CECI 120-3L





Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2F3.000.G1L	2F3.000.G1R



CECI 120 SQUARE



Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2F4.000.G1L	2F4.000.G1R



Resin body

Grey (L) Black (A)



LED Lamps	GX53 LED	GX53 LED
Power (W)	7w	10w
	110/240 V 50/60 Hz	110/240 V 50/60 Hz
Luminous Flux	700 Lm 100 lm/W	1000 Lm 100 lm/W
Colour Temperature (K)	4.000K	3.000K
Lifetime (Hours)	25.000h	

LED modules details at pag. 52-53



GX53 LED:
LAMP INCLUDED


PC diffuser



CECI 160




Power	Socket	4000K Ref. code	3000K Ref. code
7W LED	GX53	3F1.000.C1L	3F1.000.C1R
10W LED	GX53	3F1.000.D1L	3F1.000.D1R



CECI 160-2L




Power	Socket	4000K Ref. code	3000K Ref. code
7W LED	GX53	3F2.000.C1L	3F2.000.C1R
10W LED	GX53	3F2.000.D1L	3F2.000.D1R



CECI 160-3L




Power	Socket	4000K Ref. code	3000K Ref. code
7W LED	GX53	3F3.000.C1L	3F3.000.C1R
10W LED	GX53	3F3.000.D1L	3F3.000.D1R



CECI 160 SQUARE



Power	Socket	4000K Ref. code	3000K Ref. code
7W LED	GX53	3F4.000.C1L	3F4.000.C1R
10W LED	GX53	3F4.000.D1L	3F4.000.D1R



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

LED Lamp



11w

Power (W)
110/240 V
50/60 Hz

Luminous Flux

900lm

Colour Temperature (K)

4.000K

3.000K

Lifetime (Hours)


25.000h



GELMI




Power	Socket	4000K Ref. code	3000K Ref. code
LED 11W LED	GX53	1G3.000.B1L	1G3.000.B1R
Power	Socket	Ref. code	
MAX 180mm	E27	1G3.000.E27	



GELMI-EL




Power	Socket	4000K Ref. code	3000K Ref. code
LED 11W LED	GX53	2G3.000.B1L	2G3.000.B1R
Power	Socket	Ref. code	
MAX 180mm	E27	2G3.000.E27	



GELMI-GR



Power	Socket	4000K Ref. code	3000K Ref. code
LED 11W LED	GX53	3G3.000.B1L	3G3.000.B1R
Power	Socket	Ref. code	
MAX 180mm	E27	3G3.000.E27	



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

PCB + Driver



9W

Power (W)
110/240 V
50/60 Hz

Luminous
Flux

900 Lm
100 lm/W

Colour
Temperature
(K)

4.000K
6.000K

Lifetime
(Hours)


50.000h



DANZI




LED	Power	Socket	4000K Ref.code	6000K Ref. code
	9W	LED	1D3.000.L11	1D3.000.L12
	-	E27	1D3.000.E27	



DANZI-VE




LED	Power	Socket	4000K Ref.code	6000K Ref. code
	9W	LED	2D3.000.L11	2D3.000.L12
	-	E27	2D3.000.E27	



DANZI-GR



LED	Power	Socket	4000K Ref.code	6000K Ref. code
	9W	LED	3D3.000.L11	3D3.000.L12
	-	E27	3D3.000.E27	



Resin body



PMMA diffuser



LED Lamps

	LED PLATE	GX53 LED
Power (W) 110/240 V 50/60 Hz	9w = (100w)	11w = (100w)
Luminous Flux	900Lm	900Lm
Colour Temperature (K)	4.000K 6.000K	4.000K 3.000K
Lifetime (Hours)	50.000h	25.000h



Modular LED System



Backlit Colours



RITA

Resin body




PMMA diffuser



STUCCHI




Power	Socket	4000K Ref.code	3000K Ref. code
LED 11W LED	GX53	1U3.000.B1L	1U3.000.B1R
Power	Socket	Ref. code	
MAX 180mm	E27	1U3.000.E27	



CECCHI




Power	Socket	4000K Ref.code	6000K Ref. code
LED 9W	LED	1H3.000.L11	1H3.000.L12
Power	Socket	Ref. code	
MAX 180mm	E27	1H3.000.E27	



RITA



Power	Socket	4000K Ref.code	3000K Ref. code
LED 11W LED	GX53	1T3.000.B1L	1T3.000.B1R
Power	Socket	Ref. code	
MAX 180mm	E27	1T3.000.E27	



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

LED Lamp



GXS3 LED

Power (W)
110/240 V
50/60 Hz

11w
= (100W)

Luminous Flux

900Lm

Colour Temperature (K)

4.000K

3.000K

Lifetime (Hours)


25.000h




Backlit Colours



LUCIA




LED	Power	Socket	4000K Ref.code	3000K Ref. code
	11W LED	GX53	1R3.000.B1L	1R3.000.B1R
	Power	Socket	Ref.code	
	-	E27	1R3.000.E27	



REMI/LUCIA




LED	Power	Socket	4000K Ref.code	3000K Ref. code
	11W LED	GX53	1R3.602.B1L	1R3.602.B1R
	Power	Socket	Ref.code	
	-	E27	1R3.602.E27	



LUCIA-EL




LED	Power	Socket	4000K Ref.code	3000K Ref. code
	11W LED	GX53	2R3.000.B1L	2R3.000.B1R
	Power	Socket	Ref.code	
	-	E27	2R3.000.E27	



REMI/LUCIA-EL




LED	Power	Socket	4000K Ref.code	3000K Ref. code
	11W LED	GX53	2R3.602.B1L	2R3.602.B1R
	Power	Socket	Ref.code	
	-	E27	2R3.602.E27	



LUCIA-GD




LED	Power	Socket	4000K Ref.code	3000K Ref. code
	11W LED	GX53	3R3.000.B1L	3R3.000.B1R
	Power	Socket	Ref.code	
	-	E27	3R3.000.E27	



REMI/LUCIA-GD



LED	Power	Socket	4000K Ref.code	3000K Ref. code
	11W LED	GX53	3R3.602.B1L	3R3.602.B1R
	Power	Socket	Ref.code	
	-	E27	3R3.602.E27	



Resin body



PMMA diffuser



PCB + Driver



Power (W)
110/240 V
50/60 Hz

9W
= 100W

Luminous Flux

900 Lm
100 lm/W

Colour Temperature (K)

4.000K
6.000K

Lifetime (Hours)

50.000h



Backlit Colours



MADDI



Power
9W

Socket
LED

4000K
Ref.code
1V3.000.L11


6000K
Ref. code
1V3.000.L12



-

E27

1V3.000.E27



REMI/MADDI



Power
9W

Socket
LED

4000K
Ref.code
1V3.602.L11


6000K
Ref. code
1V3.602.L12



-

E27

1V3.602.E27



MADDI-VE



Power
9W

Socket
LED

4000K
Ref.code
2V3.000.L11


6000K
Ref. code
2V3.000.L12



-

E27

2V3.000.E27



REMI/MADDI-VE



Power
9W

Socket
LED

4000K
Ref.code
2V3.602.L11


6000K
Ref. code
2V3.602.L12



-

E27

2V3.602.E27



MADDI-HL



Power
9W

Socket
LED

4000K
Ref.code
3V3.000.L11


6000K
Ref. code
3V3.000.L12



-

E27

3V3.000.E27



REMI/MADDI-HL



Power
9W

Socket
LED

4000K
Ref.code
3V3.602.L11


6000K
Ref. code
3V3.602.L12



-

E27

3V3.602.E27



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

LED Lamp



GX53 LED

Power (W)
110/240 V
50/60 Hz

11w
= (100w)

Luminous Flux

900 Lm

Colour Temperature (K)

4.000K

3.000K

Lifetime (Hours)

25.000h



Modular LED System



Backlit Colours



	LUCIA 1R3.	LUCIA-EL 2R3.	LUCIA-GD 3R3.	
GABRI/LUCIA 1L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.613.010.B1L	3000K Ref. code 1R3.613.010.B1R
	Power -	Socket E27	Ref. code 1R3.613.010.E27	
GABRI/LUCIA 2L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.613.020.B1L	3000K Ref. code 1R3.613.020.B1R
	Power -	Socket E27	Ref. code 1R3.613.020.E27	
MINIGABRI/LUCIA 1L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.612.010.B1L	3000K Ref. code 1R3.612.010.B1R
	Power -	Socket E27	Ref. code 1R3.612.010.E27	
MINIGABRI/LUCIA 2L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.612.020.B1L	3000K Ref. code 1R3.612.020.B1R
	Power -	Socket E27	Ref. code 1R3.612.020.E27	

	LUCIA 1R3.	LUCIA-EL 2R3.	LUCIA-GD 3R3.	
GABRI REMI/LUCIA 1L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.613.X10.B1L	3000K Ref. code 1R3.613.X10.B1R
	Power -	Socket E27	Ref. code 1R3.613.X10.E27	
GABRI REMI/LUCIA 2L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.613.X20.B1L	3000K Ref. code 1R3.613.X20.B1R
	Power -	Socket E27	Ref. code 1R3.613.X20.E27	
MINIGABRI REMI/LUCIA 1L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.612.X10.B1L	3000K Ref. code 1R3.612.X10.B1R
	Power -	Socket E27	Ref. code 1R3.612.X10.E27	
MINIGABRI REMI/LUCIA 2L				
	Power 11W LED	Socket GX53	4000K Ref. code 1R3.612.X20.B1L	3000K Ref. code 1R3.612.X20.B1R
	Power -	Socket E27	Ref. code 1R3.612.X20.E27	

Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

PCB + Driver



Power (W)
110/240 V
50/60 Hz

9W
= 100lm

Luminous Flux

900 Lm
100 lm/W

Colour Temperature (K)

4.000K
6.000K

Lifetime (Hours)

50.000h



Backlit Colours





	MADDI 1V3.	MADDI-VE 2V3.		
GABRI/MADDI 1L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.613.010.L11	1V3.613.010.L12
	Power	Socket	Ref. code	
	-	E27	1V3.613.010.E27	
GABRI/MADDI 2L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.613.020.L11	1V3.613.020.L12
	Power	Socket	Ref. code	
	-	E27	1V3.613.020.E27	
MINIGABRI/MADDI 1L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.612.010.L11	1V3.612.010.L12
	Power	Socket	Ref. code	
	-	E27	1V3.612.010.E27	
MINIGABRI/MADDI 2L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.612.020.L11	1V3.612.020.L12
	Power	Socket	Ref. code	
	-	E27	1V3.612.020.E27	
GABRI REMI/MADDI 1L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.613.X10.L11	1V3.613.X10.L12
	Power	Socket	Ref. code	
	-	E27	1V3.613.X10.E27	
GABRI REMI/MADDI 2L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.613.X20.L11	1V3.613.X20.L12
	Power	Socket	Ref. code	
	-	E27	1V3.613.X20.E27	
MINIGABRI REMI/MADDI 1L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.612.X10.L11	1V3.612.X10.L12
	Power	Socket	Ref. code	
	-	E27	1V3.612.X10.E27	
MINIGABRI REMI/MADDI 2L				
	Power	Socket	4000K Ref. code	6000K Ref. code
	11W LED	GX53	1V3.612.X20.L11	1V3.612.X20.L12
	Power	Socket	Ref. code	
	-	E27	1V3.612.X20.E27	

Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Clear (X) Opal (Y)

LED Lamps		
Power (W) 110/240 V 50/60 Hz	7w = (75W)	10w = (100W)
Luminous Flux	700 Lm 100 lm/W	1000 Lm 100 lm/W
Colour Temperature (K)	4.000K	3.000K
Lifetime (Hours)	25.000h	

LED modules details at pag. 52-53



GX53 LED:
LAMP INCLUDED



LED VERSION



**GX53 LED
10W**

(power consumption)

Area: 6x6mt
Height: 1,1mt

20 lux

E27 VERSION



**SON
70W**

(power consumption)

Area: 6x6mt
Height: 1,1mt

20 lux






*To order the aluminium chrome cone version use the CMS (instead of CRB) suffix at the end of the code.



SAURO 1100 LED






Power	Socket	4000K Ref.code	3000K Ref. code
 7W LED	GX53	D15.555.C1LCRB	D15.555.C1RCRB
 10W LED	GX53	D15.555.D1LCRB	D15.555.D1RCRB



SAURO 800 LED






Power	Socket	4000K Ref.code	3000K Ref. code
 7W LED	GX53	D15.554.C1LCRB	D15.554.C1RCRB
 10W LED	GX53	D15.554.D1LCRB	D15.554.D1RCRB



SAURO 500 LED






Power	Socket	4000K Ref.code	3000K Ref. code
 7W LED	GX53	D15.553.C1LCRB	D15.553.C1RCRB
 10W LED	GX53	D15.553.D1LCRB	D15.553.D1RCRB



MIRELLA LED



Power	Socket	4000K Ref.code	3000K Ref. code
 7W LED	GX53	D15.505.C1LCRB	D15.505.C1RCRB
 10W LED	GX53	D15.505.D1LCRB	D15.505.D1RCRB



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

LED Lamp



GX53 LED

Power (W)
110/240 V
50/60 Hz

3w
= (40W)

Luminous Flux

350Lm
115 lm/W

Colour Temperature (K)

4.000K
3.000K

Lifetime (Hours)

25.000h

LED modules details at pag. 52-53



EXTRALETI 100 surface version



GX53 LED:
LAMP INCLUDED




GX53 LED:
LAMP INCLUDED

LETI 100 recessed version

LETI 100 ROUND




Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2C1.000.G1L	2C1.000.G1R



EXTRALETI 100 ROUND




Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2S1.000.G1L	2S1.000.G1R



LETI 100 ROUND-GR




Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2C2.000.G1L	2C2.000.G1R



EXTRALETI 100 ROUND-GR




Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2S2.000.G1L	2S2.000.G1R



LETI 100 ROUND-EL




Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2C3.000.G1L	2C3.000.G1R



EXTRALETI 100 ROUND-EL




Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2S3.000.G1L	2S3.000.G1R



LETI 100 ROUND-ST




Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2C4.000.G1L	2C4.000.G1R



EXTRALETI 100 ROUND-ST



Power	Socket	4000K Ref. code	3000K Ref. code
3W LED	GX53	2S4.000.G1L	2S4.000.G1R



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

LED Lamp



Power (W)
110/240 V
50/60 Hz

3w
= 40W

Luminous Flux

350 Lm
115 lm/W

Colour Temperature (K)

4.000K
3.000K

Lifetime (Hours)

25.000h

LED modules details at pag. 52-53



LETI 100 recessed version



GX53 LED:
LAMP INCLUDED




GX53 LED:
LAMP INCLUDED

EXTRALETI 100 surface version

LETI 100 SQUARE




Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3C1.000.G1L	3C1.000.G1R



EXTRALETI 100 SQUARE




Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3S1.000.G1L	3S1.000.G1R



LETI 100 SQUARE-GR




Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3C2.000.G1L	3C2.000.G1R



EXTRALETI 100 SQUARE-GR




Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3S2.000.G1L	3S2.000.G1R



LETI 100 SQUARE-EL




Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3C3.000.G1L	3C3.000.G1R



EXTRALETI 100 SQUARE-EL




Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3S3.000.G1L	3S3.000.G1R



LETI 100 SQUARE-ST




Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3C4.000.G1L	3C4.000.G1R



EXTRALETI 100 SQUARE-ST



Power	Socket	4000K Ref.code	3000K Ref. code
3W LED	GX53	3S4.000.G1L	3S4.000.G1R



Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

LED Lamp



Power (W)
110/240 V
50/60 Hz

3w
= (40w)

Luminous Flux

350Lm
115 lm/W

Colour Temperature (K)

4.000K
3.000K

Lifetime (Hours)

25.000h


LED modules details at pag. 52-53



EXTRALETI 200 surface version



GX53 LED:
LAMP INCLUDED

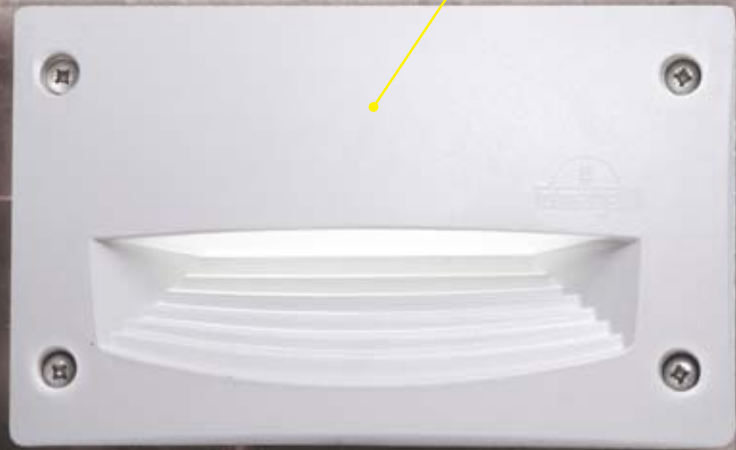

GX53 LED:
LAMP INCLUDED

LETI 200 recessed version

LETI 200

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4C1.000.G1L	4C1.000.G1R	188	98

EXTRALETI 200

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4S1.000.G1L	4S1.000.G1R	200	65

LETI 200-GL

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4C2.000.G1L	4C2.000.G1R	188	98

EXTRALETI 200-GL

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4S2.000.G1L	4S2.000.G1R	200	65

LETI 200-RS

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4C3.000.G1L	4C3.000.G1R	188	98

EXTRALETI 200-RS

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4S3.000.G1L	4S3.000.G1R	200	65

LETI 200-HS

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4C4.000.G1L	4C4.000.G1R	188	98

EXTRALETI 200-HS

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4S4.000.G1L	4S4.000.G1R	200	85

LETI 200-VP

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4C5.000.G1L	4C5.000.G1R	113	98

EXTRALETI 200-VP

	Power	Socket	4000K Ref. code	3000K Ref. code		
	3W LED	GX53	4S5.000.G1L	4S5.000.G1R	120	85

Resin body

Grey (L) White (W) Black (A)

PMMA diffuser

Opal (Y)

LED Lamps



2xGX53 LED

Power (W)
110/240 V
50/60 Hz

2x3W
= 75W

Luminous Flux

2,350 lm
115 lm/W

Colour Temperature (K)

4,000K
3,000K

Lifetime (Hours)

20,000h


LED modules details at pag. 52-53



EXTRALETI 300 surface version



2xGX53 LED
LAMP INCLUDED

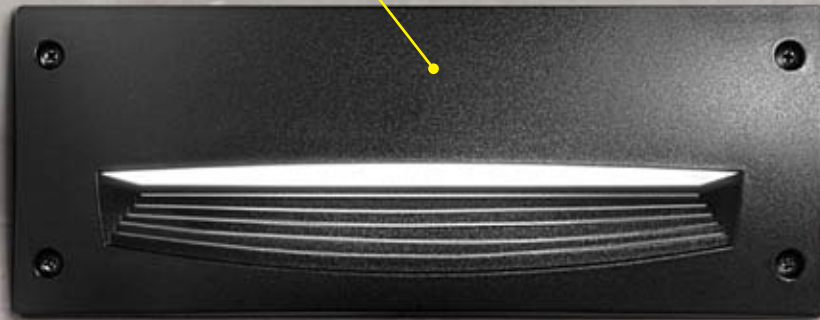

2xGX53 LED
LAMP INCLUDED

LETI 300 recessed version

LETI 300




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5C1.000.G2L

3000K
Ref. code
5C1.000.G2R



EXTRALETI 300




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5S1.000.G2L

3000K
Ref. code
5S1.000.G2R



LETI 300-GL




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5C2.000.G2L

3000K
Ref. code
5C2.000.G2R



EXTRALETI 300-GL




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5S2.000.G2L

3000K
Ref. code
5S2.000.G2R



LETI 300-RS




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5C3.000.G2L

3000K
Ref. code
5C3.000.G2R



EXTRALETI 300-RS




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5S3.000.G2L

3000K
Ref. code
5S3.000.G2R



LETI 300-HS




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5C4.000.G2L

3000K
Ref. code
5C4.000.G2R



EXTRALETI 300-HS




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5S4.000.G2L

3000K
Ref. code
5S4.000.G2R



LETI 300-VP




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5C5.000.G2L

3000K
Ref. code
5C5.000.G2R



EXTRALETI 300-VP




Power
2x3W LED

Socket
GX53

4000K
Ref. code
5S5.000.G2L


3000K
Ref. code
5S5.000.G2R



MODULAR LED SYSTEM

BENEFITS:

- **Cost saving:** long-life and efficient LED light sources
- **Built-in driver:** quick lamp replacement for an easy maintenance after installation
- **Great flexibility:** LED modules available in different wattages and color temperature
- **TÜV certified quality:** production monitored and safety tested
- **Future-proofed luminaries:** performances easy to upgrade to latest technology developments
- **Suitable for outdoor:** driver fully protected against heat and humidity by silicone paste.



4,5W - GU10 LED LAMP

Lamp	Power	Luminous Flux	Colour Temperature	Voltage Range	Equivalent	Savings
	4,5W	300Lm 75 lm/W	4.000K 3.000K	100-240V 50/60 Hz	35W HALOGEN	SAVE -90%

LVD tested

EMC tested

ERP tested

TUV SUD

PRODUCTION MONITORED SAFETY TESTED

high performance **NICHIA LED**

4,5W	4000K Daylight white	H.LED.GU10
	3000K Warm white	H.LED.GU10.3K

3W - GX53 LED LAMP

Lamps	Power	Luminous Flux	Colour Temperature	Voltage Range	Equivalent	Savings
	3W	350Lm 115 lm/W	4.000K 3.000K	100-240V 50/60 Hz	40W INCANDESCENT	SAVE -93%

LVD tested

EMC tested

ERP tested

TUV SUD

PRODUCTION MONITORED SAFETY TESTED

3W	4000K Daylight white	H.LED.G53
	3000K Warm white	H.LED.G53.3K

7W - GX53 LED LAMP

Lamp	Power	Luminous Flux	Colour Temperature	Voltage Range	Equivalent	Savings
	7W	700Lm 100 lm/W	4.000K 3.000K	100-240V 50/60 Hz	75W INCANDESCENT	SAVE -90%

LVD tested

EMC tested

ERP tested

TUV SUD

PRODUCTION MONITORED SAFETY TESTED

7W	4000K Daylight white	H2.LED.G53
	3000K Warm white	H2.LED.G53.3K

10W - GX53 LED LAMP

Lamp	Power	Luminous Flux	Colour Temperature	Voltage Range	Equivalent	Savings
	10W	1.000Lm 100 lm/W	4.000K 3.000K	100-240V 50/60 Hz	100W INCANDESCENT	SAVE -90%

LVD tested

EMC tested

ERP tested

TUV SUD

PRODUCTION MONITORED SAFETY TESTED

10W	4000K Daylight white	H3.LED.G53
	3000K Warm white	H3.LED.G53.3K

11W - GX53 LED LAMP

Lamps	Power	Luminous Flux	Colour Temperature	Voltage Range	Equivalent	Savings
	11W	900Lm	4.000K 3.000K	100-240V 50/60 Hz	100W INCANDESCENT	SAVE -89%

LVD tested

EMC tested

ERP tested

TUV SUD

PRODUCTION MONITORED SAFETY TESTED

NEW GX53 LED MODULE

11W	4000K Daylight white	H4.LED.G53
	3000K Warm white	H4.LED.G53.3K



NEW FILAMENT LED LAMP




for Classic Lantern

- Clear **LED filament lamp** with the look and feel of an incandescent bulb.
- Perfect **matching with classic lanterns.**
- **Suitable for outdoor use:** driver fully protected against heat and humidity by silicone paste.
- **Omnidirectional light:** 360° light output.
- **High efficiency:** 90% energy saving.

SUITABLE FOR OUTDOOR




Power	5 W
Socket Type	E27
Luminous Flux	500Lm
Colour Temperature	2.700K
Voltage Range	220-240V 50/60 Hz
Working Temperature	-30 °C / +80 °C



If you would like to find out more about Scolmore products, have a look at our catalogues:

CLICK

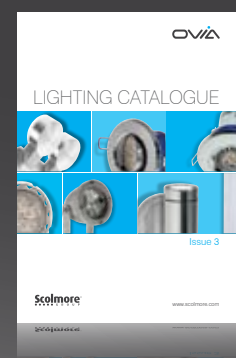

OVIA



or visit www.scolmore.com

The Scolmore website showcases the full range of quality, cost effective products currently on offer. With regular updates on new products and details of developments within our business the site is a great source of information, keeping you fully up to date with the CLICK of a button.

Having recently updated the site to include links to product and service specific micro sites we aim to give you access to new information in a timely fashion. You can access these sites via links on the main site or by connecting directly. Either way you can be sure you will have the latest information at your fingertips.



United Kingdom

Scolmore[®]
G R O U P

Scolmore Park, Landsberg,
Lichfield Road Industrial Estate,
Tamworth, Staffordshire
B79 7XB United Kingdom

T: +44 (0)1827 63454
F: +44 (0)1827 63362
E: sales@scolmore.com

www.scolmore.com

Southern Ireland

CLICK[®] Litehouse

18 Corrig Road,
Sandyford,
Dublin 18,
Ireland

T: +353 (1) 2811 122
F: +353 (1) 2811 224
E: sales@clicklighthouse.ie

www.clicklighthouse.ie