

07

Interior & Exterior Wall Lights



127
RADIOLED®
OPTIMUM 8W



128
RADIOLED®
OPTIMUM 14W

NEW



129
RADIOLED®
OPTIMUM 19W



130
RADIOLED®
OPTIMUM RIMS



133
RADIOLED®
UTILITY



135
RADIOLED®
STYLE 16W & 21W

NEW



136
RADIOLED®
STYLE 32W

NEW



137
RADIOLED®
STYLE SLIM



139
RADIOLED®
VOGUE



141
RADIOLED®
ELEMENT



142
NITELED™
WALL SPHERE



143
ASTRA
WALL LIGHTS



145
NITELED™
QUARTER SPHERE



146
NITELED™
WALL CURVE



147
NITELED™
WALL SLIM



148
NITELED™
WALL BAR



149
NITELED™
WALL WEDGE



150
NITELED™
WALL ARC



151
NITELED™
WALL CRESCENT



152
NITELED™
DOME
WALL LIGHTS

NEW



154
CERAMIC
UPLIGHTS



156
ELEGENTI LED
SURFACE



157
BODO
WALL LIGHT



158
DORCHESTER
WALL LIGHT



159
BERKELEY
WALL LIGHT

RadiaLED® Optimum

Same light level, 50% energy saving

UP TO

84 LPCW

LUMENS PER CIRCUIT WATT

UP TO

1,600

LUMENS

EXTENDED

10 YEAR

WARRANTY



RadiaLED® Optimum rim options

High quality rim accessories for RadiaLED® Optimum are available in a number of different finishes. See page 130 for more information.

✓ BLACK



✓ WHITE



✓ SATIN CHROME



✓ CHROME

✓ ANTIQUE BRASS



✓ SATIN SILVER



✓ BLACK NICKEL



CONDUIT ENTRY POINTS

The polycarbonate base for RadiaLED® has been specifically designed with side and rear conduit entry points into the base and help maintain the units' IP rating.



ANTI-TAMPER

The anti-tamper added security screw on RadiaLED® Optimum ensures peace of mind. Simply twist and lock the diffuser into place and then secure screw in fitting.



MICROWAVE SENSING

Microwave on/off and step dimming variants are available for RadiaLED® Optimum, which offers additional energy and cost savings.

CLASSIFICATION

Class 1 
IP65 | 240V | IK09

LED



4000K | CRI: Ra (80)


FINISH

See rim options on page 130




CONSTRUCTION

Body - Polycarbonate
Diffuser - Opal polycarbonate



86mm



Ø220mm

RadiaLED Optimum

50% energy saving against 16W 2D fluorescent



10 year
Extended warranty*



Emergency
Versions available



Microwave
Sensor available



Photocell
Options available

- 83 lumens per circuit Watt
- IP65 weather resistant, anti-vandal construction
- IK09 impact rating
- Instant start up time, no warm up time
- Twin conduit side entry points
- Designed to be used in conjunction with 14W and 19W RadiaLED® Optimum
- Available with seven rim accessories
- **NEW** dusk to dawn on/off photocell

✓ JC23331



CODE	DESCRIPTION	WATT	LUMENS
JC23331WOP	RadiaLED® Optimum	8W	660
JC23331WOPPC	RadiaLED® Optimum c/w on/off photocell	8W	660
JC23333WOP	RadiaLED® Optimum c/w microwave dimming	8W	660
JC23332WOP	RadiaLED® Optimum emergency	8W	660
JC23332WOPPC	RadiaLED® Optimum c/w on/off photocell emergency	8W	660
JC23334WOP	RadiaLED® Optimum c/w microwave on/off sensor emergency	8W	660

*10 year for domestic dwellings, 5 year for commercial properties. Requires online registration.

RadiaLED Optimum

NEW
VARIANTS

50% energy saving against 28W 2D fluorescent

- ✓ **10 year**
Extended warranty*
- ✓ **Emergency**
Versions available
- ✓ **Microwave**
Sensor available
- ✓ **Photocell**
Options available

- 79 lumens per circuit Watt
- IP65 weather resistant, anti-vandal construction
- IK09 impact rating
- Instant start up time, no warm up time
- Twin conduit side entry points
- Designed to be used in conjunction with 8W and 19W RadiaLED® Optimum
- Available with seven rim accessories
- **NEW** dusk to dawn on/off photocell

✓ JC23341



CODE	DESCRIPTION	WATT	LUMENS
JC23341WOP	RadiaLED® Optimum	14W	1100
JC23341WOPPC	RadiaLED® Optimum c/w on/off photocell	14W	1100
JC23343WOP	RadiaLED® Optimum c/w microwave dimming	14W	1100
JC23342WOP	RadiaLED® Optimum emergency	14W	1100
JC23342WOPPC	RadiaLED® Optimum c/w on/off photocell emergency	14W	1100
JC23344WOP	RadiaLED® Optimum c/w microwave on/off sensor emergency	14W	1100

*10 year for domestic dwellings, 5 year for commercial properties. Requires online registration.

CLASSIFICATION

Class 1
IP65 | 240V | IK09

LED

4000K

4000K | CRI: Ra (80)


FINISH

See rim options on page 130



CONSTRUCTION

Body - Polycarbonate
Diffuser - Opal polycarbonate

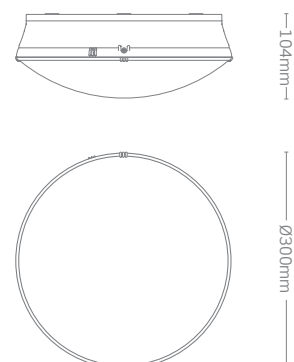

CLASSIFICATION

Class 1 
IP65 | 240V | IK09

LED



4000K | CRI: Ra (80)


FINISH

See rim options on page 130




CONSTRUCTION

Body - Polycarbonate
Diffuser - Opal polycarbonate



104mm



Ø300mm

RadiaLED Optimum

50% energy saving against 38W 2D fluorescent



10 year
Extended warranty*



Emergency
Versions available



Microwave
Sensor available



Photocell
Options available

- 84 lumens per circuit Watt
- IP65 weather resistant, anti-vandal construction
- IK09 impact rating
- Instant start up time, no warm up time
- Twin conduit side entry points
- Designed to be used in conjunction with 8W and 14W RadiaLED® Optimum
- Available with seven rim accessories
- **NEW** dusk to dawn on/off photocell

✓ JC23351



CODE	DESCRIPTION	WATT	LUMENS
JC23351WOP	RadiaLED® Optimum	19W	1600
JC23351WOPPC	RadiaLED® Optimum c/w on/off photocell	19W	1600
JC23353WOP	RadiaLED® Optimum c/w microwave on/off sensor	19W	1600
JC23352WOP	RadiaLED® Optimum emergency	19W	1600
JC23352WOPPC	RadiaLED® Optimum c/w on/off photocell emergency	19W	1600
JC23354WOP	RadiaLED® Optimum c/w microwave on/off sensor emergency	19W	1600

*10 year for domestic dwellings, 5 year for commercial properties. Requires online registration.

RadiaLED Optimum Rims

NEW
VARIANTS

Rim accessories to compliment RadiaLED® Optimum

- Rim options for final colour and decoration of RadiaLED® Optimum bulkheads
- Matching finish and construction for both 8W, 14W and 19W versions
- Twin conduit entry points

✓ BLACK



✓ CHROME



✓ WHITE



✓ SATIN CHROME



✓ ANTIQUE BRASS



✓ SATIN SILVER




✓ BLACK NICKEL




CODE	DESCRIPTION	FINISH
JC23330BLK	RadiaLED® Optimum 8W accessory rim	Black
JC23330CH	RadiaLED® Optimum 8W accessory rim	Chrome
JC23330WH	RadiaLED® Optimum 8W accessory rim	White
JC23330SCH	RadiaLED® Optimum 8W accessory rim	Satin Chrome
JC23330BLN	RadiaLED® Optimum 8W accessory rim	Black Nickel
JC23330AB	RadiaLED® Optimum 8W accessory rim	Antique Brass
JC23330SAS	RadiaLED® Optimum 8W accessory rim	Satin Silver
JC23340BLK	RadiaLED® Optimum 14W & 19W accessory rim	Black
JC23340CH	RadiaLED® Optimum 14W & 19W accessory rim	Chrome
JC23340WH	RadiaLED® Optimum 14W & 19W accessory rim	White
JC23340SCH	RadiaLED® Optimum 14W & 19W accessory rim	Satin Chrome
JC23340BLN	RadiaLED® Optimum 14W & 19W accessory rim	Black Nickel
JC23340AB	RadiaLED® Optimum 14W & 19W accessory rim	Antique Brass
JC23340SAS	RadiaLED® Optimum 14W & 19W accessory rim	Satin Silver

14W/19W RIM



8W RIM





RadiaLED® Utility

Reliability & performance that exceeds traditional 2D

UP TO

60 LPCW

LUMENS PER CIRCUIT WATT

UP TO

1,370

LUMENS

EXTENDED

5 YEAR

WARRANTY

BASE

The RadiaLED® polycarbonate base has been specifically designed to accommodate the JCC emergency unit.

LIGHT REFLECTOR PANEL

The radial reflector ensures that the light is distributed evenly across the fitting.

DURABLE POLYCARBONATE DIFFUSER

Our RadiaLED® products come with the highest quality polycarbonate diffusers for maximum durability.



HEAT SINK

RadiaLED® Utility's specially engineered aluminium heat sink effectively draws heat away from the LED chips and helps prolong the life of the fitting.

RADIAL LED ARRAY

The unique LED array creates even light transmission and avoids any unsightly 2D lamps or hotspots.



✓ Even light distribution




✗ No LED hotspots



✗ No unsightly 2D lamp

The light emitted from RadiaLED®, spreads evenly across the reflector before being dispersed smoothly through the polycarbonate diffuser, giving a completely uniform light transmission.

CLASSIFICATION

Class 1 
IP65 | 240V | IK09

LED



4000K | CRI: Ra (80)

FINISH

White



WOP - Opal diffuser
WPR - Prismatic diffuser

CONSTRUCTION


Body - Polycarbonate
Diffuser - Polycarbonate

TWIN CONDUIT ENTRY POINTS FOR EASE OF INSTALLATION


WHEN ORDERING PHOTOCELL

Please select 'WOP' or 'WPR' and
then add 'PC' suffix to the code

14W



23W



RadiaLED Utility

The direct 16W and 28W 2D replacements

NEW
VARIANTS



5 year
Extended warranty*



Emergency
Versions available



Microwave
Sensor available



Dimmable
Options

- Outperforms 16W and 28W CFL
- IP65 weather resistant, anti-vandal construction
- Instant start up, no warm up time
- LED not affected by on/off switching
- Corrosion resistant suitable for coastal locations
- Opal or prismatic polycarbonate diffuser options
- IK09 impact rating
- **NEW** dusk to dawn on/off photocell

✓ JC23201WPR



✓ JC23202WOP



CODE	DESCRIPTION	WATT	LUMENS (WOP)	LUMENS (WPR)
JC23201	RadiaLED® Utility	14W	560	790
JC23201PC	RadiaLED® Utility dusk to dawn on/off photocell	14W	560	790
JC23211	RadiaLED® Utility c/w microwave on/off sensor	14W	560	790
JC23221	RadiaLED® Utility c/w microwave dimming	14W	560	790
JC23202	RadiaLED® Utility	23W	915	1370
JC23202PC	RadiaLED® Utility dusk to dawn on/off photocell	23W	915	1370
JC23212	RadiaLED® Utility c/w microwave on/off sensor	23W	915	1370
JC23222	RadiaLED® Utility c/w microwave dimming	23W	915	1370
JC23210	RadiaLED® Utility emergency	14W	560	790
JC23210PC	RadiaLED® Utility dusk to dawn on/off photocell emergency	14W	560	790
JC23214	RadiaLED® Utility c/w microwave on/off sensor emergency	14W	560	790
JC23203	RadiaLED® Utility emergency	23W	915	1370
JC23203PC	RadiaLED® Utility dusk to dawn on/off photocell emergency	23W	915	1370
JC23213	RadiaLED® Utility c/w microwave on/off sensor emergency	23W	915	1370
JC23223	RadiaLED® Utility c/w microwave dimming emergency	23W	915	1370

*Requires online registration.

RadiaLED® Style

Up to 3 times as efficient as traditional 2D

UP TO

91 LPCW

LUMENS PER CIRCUIT WATT

UP TO

2,900

LUMENS

EXTENDED

5 YEAR

WARRANTY



**PATENTED RADIALED®
LED TECHNOLOGY**

UK patent No. 1209256.5

**CONTINUOUS GASKET
FOR IP44 RATING**

PRESSED STEEL BODY

The practical solution to the issues of 2D



LONG LIFE

The life of traditional 2D lamps is shortened by continuous switching on and off. The 30,000 hour life of RadiaLED® is not affected by frequent switching.



EMERGENCY

RadiaLED® products have been specifically designed to accommodate the JCC emergency unit.



INSTANT START-UP

RadiaLED® produces light as soon as it's switched on. Traditional 2D lamps have a much lower start-up time and will ultimately fail with frequent switching.



MICROWAVE

For optimum energy saving, RadiaLED® is available with an integral microwave sensor. Activated by both movement and daylight, RadiaLED® remains on only when required, switching off or dimming when the room is unoccupied or when daylight increases.



✓ **Even light distribution**




✗ **No unsightly 2D lamp**



✗ **No LED hotspots**

CLASSIFICATION

Class 1 
IP44 | 240V | IK09

LED



4000K | CRI: Ra (80)

FINISH

White



CONSTRUCTION

Body - Mild steel
Diffuser - Opal polycarbonate

RadiaLED® Style

High performance LED wall & ceiling lights

-  **5 year**
Extended warranty*
-  **Emergency**
Versions available
-  **Microwave**
Sensor available
-  **Dimmable**
Options

- 16W and 28W CFL replacements
- Outstanding efficiency with up to 64 lumens per circuit watt
- IP44 protection against dust and moisture
- Performs well at low temperatures
- Ideal for corridors and stairwells
- Suitable for corridor and stairwell applications
- IK09 impact rating


✓ JC23205WOP




✓ JC23207WOP



16W



21W



CODE	DESCRIPTION	WATT	LUMENS
JC23205	RadiaLED® Style	16W	1025
JC23215	RadiaLED® Style c/w microwave on/off sensor	16W	1025
JC23225	RadiaLED® Style c/w microwave dimming	16W	1025
JC23207	RadiaLED® Style	21W	1250
JC23217	RadiaLED® Style c/w microwave on/off sensor	21W	1250
JC23227	RadiaLED® Style c/w microwave dimming	21W	1250
JC23209	RadiaLED® Style emergency	21W	1250
JC23219	RadiaLED® Style c/w microwave on/off sensor emergency	21W	1250
JC23229	RadiaLED® Style c/w microwave dimming emergency	21W	1250

*Requires online registration.

RadiaLED® Style

High performance LED wall light

NEW
VARIANT
Available Nov '16

CLASSIFICATION
Class 1
IP44 | 240V | IK09

-  **5 year**
Extended warranty*
-  **Emergency**
Versions available
-  **Microwave**
Sensor available
-  **Dimmable**
Options

- Outperforms traditional 38W CFL
- Up to 90 lumens per circuit Watt
- IK09 impact rating
- Ideal for mounting on high ceilings, in corridors and stairwells
- IP44 protection against dust and moisture
- Available in emergency variants
- Available with microwave on/off sensors

✓ JC23231WOP



LED



4000K | CRI: Ra (80)

FINISH

White




CONSTRUCTION

Body - Mild steel
Diffuser - Opal polycarbonate

CODE	DESCRIPTION	WATT	LUMENS
JC23232	RadiaLED® Style	32W	2900
JC23232EM	RadiaLED® Style emergency	32W	2900
JC23232MW	RadiaLED® Style c/w microwave on/off sensor	32W	2900
JC23232MWEM	RadiaLED® Style c/w microwave on/off sensor emergency	32W	2900

*Requires online registration.



CLASSIFICATION

Class 1 ⚡

IP20 | 240V | IK09

LED



4000K | CRI: Ra (80)

FINISH

White



CONSTRUCTION

Body - Mild steel

Diffuser - Opal polycarbonate

RadiaLED® Style Slim

High performance, slim profile LED wall light

NEW
PRODUCT

Available Nov '16



5 year
Extended warranty*



Emergency
Versions available


- 16W, 28W and 38W CFL replacements
- Outstanding efficiency with up to 90 lumens per circuit watt
- Like-for-like retrofit
- Suitable for corridor and stairwell applications
- IK09 impact rating

✓ JC23230




12W

95mm




18W

102mm



32W

110mm



CODE	DESCRIPTION	WATT	LUMENS
JC23240	RadiaLED® Style Slim	12W	1050
JC23241	RadiaLED® Style Slim	18W	1500
JC23242	RadiaLED® Style Slim	32W	2900
JC23240EM	RadiaLED® Style Slim emergency	12W	1050
JC23241EM	RadiaLED® Style Slim emergency	18W	1500
JC23242EM	RadiaLED® Style Slim emergency	32W	2900

*Requires online registration.

RadiaLED® Vogue

Up to twice as bright as traditional CFL

UP TO

58 LPCW

LUMENS PER CIRCUIT WATT

UP TO

2,080

LUMENS

EXTENDED

5 YEAR

WARRANTY



Stylish design

With RadiaLED® Vogue's decorative chrome and white rims, it makes it the ideal fitting to illuminate corridors, stairwells and other amenity areas.



Even light distribution



No unsightly 2D lamp



No LED hotspots

Backlit halo illumination

RadiaLED® Vogue's back illuminated feature emits a halo of light behind the rim, which allows you to accent walls with soft pools of light.

CLASSIFICATION

Class 1 ⚡
IP40 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Chrome, white



CONSTRUCTION


Body - Polycarbonate
Diffuser - Opal polycarbonate
Rim - Pressed steel

WHITE


Use WH suffix
when ordering



23W



36W



RadiaLED Vogue

High performance LED wall and ceiling light



5 year
Extended warranty*



Emergency
Versions available



Microwave
Sensor available

- 38W 2D and 2x26W CFL equivalents
- Stylish high output wall or ceiling light
- Surface luminaire with high quality decorative rim
- Twin conduit entry points
- Ideal for corridors, stairwells and other amenity applications
- Available in chrome or white finishes

✓ JC96311CH
(Chrome)



CODE	DESCRIPTION	WATT	LUMENS
JC96311	RadiaLED® Vogue	23W	1215
JC96313	RadiaLED® Vogue	36W	2080
JC96317	RadiaLED® Vogue c/w microwave on/off sensor	36W	2080
JC96312	RadiaLED® Vogue emergency	23W	1215
JC96314	RadiaLED® Vogue emergency	36W	2080

*Requires online registration.

RadiaLED® Element

Up to 30% energy saving against 28W 2D

UP TO

51 LPCW

LUMENS PER CIRCUIT WATT

UP TO

1,015

LUMENS

EXTENDED

5 YEAR

WARRANTY

Stylish design with a range of accessories

High quality rim and eyelid accessories for RadiaLED® Element

BASE

Code - JC23026

EYELID ACCESSORIES

Codes - JC23016/17

SILVER ACCESSORIES

Codes - JC23018/19

CHROME ACCESSORY

Code - JC23019



Two depths

Eyelid and silver accessories are available in shallow and deep sizes

Shallow rims allow for use with conduit entry points

The practical solution to the issues of 2D



LONG LIFE

The life of traditional 2D lamps is shortened by continuous on and off switching. The 30,000 hour life of RadiaLED® is not affected by switching frequently.



INSTANT START-UP

RadiaLED® produces light as soon as it's switched on. Traditional 2D lamps have a much longer start-up time and will ultimately fail with frequent switching.



EMERGENCY


RadiaLED® products have been specifically designed to accommodate the JCC emergency unit.



MICROWAVE

For optimum energy saving, RadiaLED® products are available with an integral microwave sensor. Activated by both movement and daylight.

CLASSIFICATION

Class 1 
IP65 | 240V

LED



4000K | CRI: Ra (80)


FINISH

See decorative rims


CONSTRUCTION

Body - Polycarbonate
Diffuser - Opal polycarbonate
Rim - Polycarbonate textured finish
UV stabilised

JC23016



JC23017



JC23018



JC23019



JC23026



RadiaLED Element

28W 2D replacement



5 year
Extended warranty*



Emergency
Version available



Microwave
Sensor available



Dimmable
Options

- Stylish high output wall or ceiling light
- IP65 weather resistant
- Twin conduit entry points
- Ideal for corridors, stairwells and other amenity applications
- Decorative rims available

✓ JC23026



CODE	DESCRIPTION	WATT	LUMENS
JC23026	RadiaLED® Element	20W	1015
JC23027	RadiaLED® Element emergency	20W	1015
JC23028	RadiaLED® Element c/w microwave sensor	20W	1015
JC23029	RadiaLED® Element c/w microwave dimming	20W	1015
JC23016BLK	RadiaLED® Element deep eyelid attachment	-	-
JC23017BLK	RadiaLED® Element shallow eyelid attachment	-	-
JC23018SIL	RadiaLED® Element deep decorative rim	-	-
JC23019CH	RadiaLED® Element shallow decorative rim	-	-
JC23019SIL	RadiaLED® Element shallow decorative rim	-	-

*Requires online registration.

NiteLED Wall Sphere

Ultra durable exterior LED lighting

✓ **2 year**
Product guarantee

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- 40% energy saving against 16W 2D CFL
- Low energy 10W LED
- IP54 protection against dust and moisture
- Ultra durable aluminium construction

✓ JC39418



CLASSIFICATION

⊕ Class 1
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION


Body - Die-cast aluminium
Diffuser - Opal polycarbonate

CODE
JC39418

DESCRIPTION
NiteLED™ Wall Sphere

WATT
10W

LUMENS
600



CLASSIFICATION

Class 1 ⚡
IP65 | 240V

LAMP (NOT INCLUDED)

Halogen 42W E27 (GLS) MAX
TC-S 9W G23

FINISH

Grey



CONSTRUCTION

Body - Aluminium
Diffuser - Prismatic polycarbonate

Note: When mounting horizontally,
do not exceed 42W halogen

Astra Wall Light


Cost effective bulkhead light with IP65 protection

✓ 2 year
Product guarantee

- Impact resistant construction
- Available with photocell

✓ JC40007CL

✓ JC40007RD



CODE	DESCRIPTION	LAMP
JC40007CL	Astra with clear diffuser	Halogen 42W (GLS) MAX
JC40007RD	Astra with red diffuser	Halogen 42W (GLS) MAX
JC40009CL	Astra low energy with clear diffuser	TC-S 9W x2
JC40010CL	Astra low energy with clear diffuser c/w photocell	TC-S 9W

NiteLED™

Ultra durable exterior LED lighting

UP TO

90 LPCW

LUMENS PER CIRCUIT WATT

UP TO

900

LUMENS



MATCHING FITTINGS

The NiteLED™ range offers matching bollards, wall lights and ground lights, whilst offering matching colour temperatures and finishes.



INSTANT START-UP

NiteLED™ produces light as soon as it's switched on. Traditional lamps have a much slower startup time and will ultimately fail with frequent switching.



ALL WEATHER PROTECTION

The supreme quality of the NiteLED™ range is shown through a minimum IP44 rating, which provides excellent protection against dust and moisture, combined with a high quality paint finish.



PERFORMS WELL AT LOW TEMPERATURES

NiteLED™ starts instantly even in the coldest conditions. The life of many traditional lamps are not only shortened by low temperatures but the start-up time is also increased.



DURABLE CONSTRUCTION

The NiteLED™ range has been designed using high quality die cast aluminium and marine grade, low carbon stainless steel in order to minimise corrosion and extend product life.



SENSOR COMPATIBLE

Suitable for connection to PIR, microwave sensors or photocells.

CLASSIFICATION

Class 1 ⚡
IP65 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite




CONSTRUCTION

Body - Aluminium
Diffuser - Polycarbonate



MATCHING BOLLARD

See page 210



NiteLED Quarter Sphere

High efficiency LED exterior lighting



2 year
Product guarantee



Matching bollard
See page 210

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- Low energy 10.5W LED
- IP65 weather resistant
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp
- Can be used as an uplight or downlight

✓ JC39408



CODE

JC39408

DESCRIPTION

NiteLED™ Quarter Sphere wall light

WATT

10.5W

LUMENS

900

NiteLED Wall Curve

High efficiency LED exterior lighting



2 year
Product guarantee



Matching bollard
See page 212

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 5W LED
- IP54 protection against dust and moisture
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39409



CLASSIFICATION

Class 1
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION

Body - Aluminium
Diffuser - Frosted polycarbonate



MATCHING BOLLARD


See page 212

CODE
JC39409


DESCRIPTION
NiteLED™ Wall Curve

WATT
5W

LUMENS
350



CLASSIFICATION

Class 1 
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite




CONSTRUCTION

Body - Aluminium
Diffuser - Frosted polycarbonate



MATCHING BOLLARD

See page 213



NiteLED Wall Slim

High efficiency LED exterior lighting



2 year
Product guarantee



Matching bollard
See page 213

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 6W LED
- IP54 protection against dust and moisture
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp



✓ JC39410

CODE
JC39410

DESCRIPTION
NiteLED™ Wall Slim

WATT
6W

LUMENS
420

NiteLED Wall Bar

High efficiency LED exterior lighting

-  **2 year**
Product guarantee
-  **Matching bollard**
See page 212

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 5W LED
- IP54 protection against dust and moisture
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39411



CLASSIFICATION

⚡ Class 1
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION


Body - Aluminium
Diffuser - Frosted polycarbonate



MATCHING BOLLARD

See page 212

CODE	DESCRIPTION	WATT	LUMENS
JC39411	NiteLED™ Wall Bar	5W	320



CLASSIFICATION

Class 1 ⚡
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite




CONSTRUCTION

Body - Aluminium
Diffuser - Frosted polycarbonate



MATCHING BOLLARD

See page 213



NiteLED Wall Wedge

High efficiency LED exterior lighting



2 year
Product guarantee



Matching bollard
See page 213

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 3W LED
- IP54 protection against dust and moisture
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39406



CODE
JC39406

DESCRIPTION
NiteLED™ Wall Wedge

WATT
3W

LUMENS
150

NiteLED Wall Arc

High efficiency LED exterior lighting



2 year
Product guarantee



Matching bollard
See page 213

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 3W LED
- IP54 protection against dust and moisture
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39407



CLASSIFICATION

⚡ Class 1
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION

Body - Aluminium
Diffuser - Clear polycarbonate



MATCHING BOLLARD


See page 213

CODE
JC39407

DESCRIPTION
NiteLED™ Wall Arc

WATT
3W

LUMENS
150



CLASSIFICATION

Class 1 ⚡
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION

Body - Aluminium
Diffuser - Opal polycarbonate

NiteLED Wall Crescent



High efficiency LED exterior lighting



2 year
Product guarantee

- LED wall light with matching colour temperature and finish to the NiteLED™ range
- Low energy 8.5W LED
- IP54 protection against dust and moisture
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39416



CODE

JC39416

DESCRIPTION

NiteLED™ Wall Crescent

WATT

8.5W

LUMENS

300

NiteLED Dome Wall Light

High efficiency LED exterior lighting

-  **2 year**
Product guarantee
-  **Matching bollard**
See page 216-217

- Direct 42W halogen GLS replacement
- 8.5W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Louvered diffuser configuration ideal for highlighting in car parks and illuminating walkways
- Plain diffuser for a wider spread of light
- Modern wall light range, ideal for both domestic and commercial amenity lighting

✓ JC39428SS



✓ JC39429SS



CODE	DESCRIPTION	WATT	LUMENS
JC39428SS	NiteLED™ Dome wall light louvred	8.5W	200
JC39429SS	NiteLED™ Dome wall light plain	8.5W	200

CLASSIFICATION

⊕ Class 1
IP44 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Stainless steel




CONSTRUCTION


Body - AISI 316L Stainless steel
Diffuser - Opal polycarbonate



MATCHING BOLLARD
See page 216-217

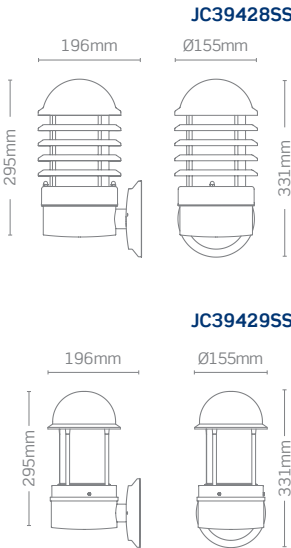

CLASSIFICATION

Class 1 
IP44 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Black



CONSTRUCTION


Body - Die-cast aluminium
Diffuser - Opal polycarbonate




MATCHING BOLLARD

See page 214-215

JC39428BLK



JC39429BLK



NiteLED Dome Wall Light

High efficiency LED exterior lighting



2 year
Product guarantee



Matching bollard
See page 214-215

- Direct 42W halogen GLS replacement
- 8.5W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Louvered diffuser configuration ideal for highlighting in car parks and illuminating walkways
- Plain diffuser for a wider spread of light
- Modern wall light range, ideal for both domestic and commercial amenity lighting

✓ JC39428BLK



✓ JC39429BLK



CODE	DESCRIPTION	WATT	LUMENS
JC39428BLK	NiteLED™ Dome wall light louvered	8.5W	200
JC39429BLK	NiteLED™ Dome wall light plain	8.5W	200

Ceramic Uplighters

LED ceramic wall lights

NEW
PRODUCT



5 year
Extended warranty*



2 year
Product guarantee

- **NEW** 9W mains LED versions available
- Over 80% energy saving on LED versions compared with halogen 42W GLS
- 5 year domestic warranty (LED versions only)
- Ready to paint, glazed finish
- Halogen versions dimmable as standard

✓ JC90122 Elmer



✓ JC90124 Hayling



CLASSIFICATION

- ⊕ Class1 (LED)
- Class 2 (Halogen)
- IP20 | 240V

LED



3000K | CRI: Ra (83)
(JC90122/4 only)

LAMP

42W halogen ES E27
(JC90121/3 only)

FINISH


White




CONSTRUCTION

Body - Glazed ceramic

ELMER





HAYLING



CODE	DESCRIPTION	LAMP	WATT	LUMENS
JC90122	Elmer LED Ceramic Uplighter	-	9W	580
JC90124	Hayling LED Ceramic Uplighter	-	9W	540
JC90121	Elmer Ceramic Uplighter	42W halogen ES E27	-	-
JC90123	Hayling Ceramic Uplighter	42W halogen ES E27	-	-

*5 year extended warranty. Requires online registration. LED variants only.

CLASSIFICATION

Class 1(LED) 
 Class 2 (Halogen) 
 IP20 | 240V

LED

3000K | CRI: Ra (83)
 (JC90126/8 only)

LAMP



42W halogen ES E27
 (JC90125/7 only)

FINISH

White

**CONSTRUCTION**

Body - Glazed ceramic

MIDDLETON**EMSWORTH**

Ceramic Uplighters

LED ceramic wall lights



5 year
 Extended warranty*



2 year
 Product guarantee

- **NEW** 8.5W mains LED versions available
- Over 75% energy saving on LED versions compared with halogen 42W GLS
- 5 year domestic warranty (LED versions only)
- Ready to paint, glazed finish
- Halogen versions dimmable as standard

✓ JC90126 Middleton



✓ JC90128 Emsworth



CODE	DESCRIPTION	LAMP	WATT	LUMENS
JC90126	Middleton LED Ceramic Uplighter	-	9W	600
JC90128	Emsworth LED Ceramic Uplighter	-	9W	550
JC90125	Middleton Ceramic Uplighter	42W halogen ES E27	-	-
JC90127	Emsworth Ceramic Uplighter	42W halogen ES E27	-	-

*5 year extended warranty. Requires online registration. LED variants only.

Elegenti LED Surface

LED decorative accent light

✓ 2 year
Product guarantee

- Wall and floor decorative LED feature luminaires
- Suitable for Zone 1 interior or exterior applications
- Multi-directional, high output fittings
- Cast aluminium
- Cool to touch
- LED driver bought separately

✓ JC71130



CODE	DESCRIPTION	WATT	LUMENS
JC71130	Elegenti LED Light one-way white	0.4W	20 (per head)
JC71132	Elegenti LED Light two-way white	0.8W	40 (per head)
JC71134	Elegenti LED Light four-way white	1W	60 (per head)

CLASSIFICATION

Class 3
IP68 | 12V DC

LED



6000K | CRI: Ra (75)

FINISH

Aluminium



CONSTRUCTION

Body - Cast aluminium

Number of units that can be connected in parallel (using a 12V 30W constant Voltage driver):
JC71130 - Up to 75
JC71132 - Up to 37
JC71134 - Up to 30



JC71130



JC71132



CLASSIFICATION

Class 1 

IP44 | 240V | Zone 2

LAMP (NOT INCLUDED)

Halogen energy saver, 33W G9

FINISH


Chrome



CONSTRUCTION

Main body - Pressed mild steel

Diffuser - Opal glass/tempered



Bodo Wall Light

Decorative bathroom wall light



2 year
Product guarantee



Dimmable
As standard

- Halogen bathroom wall & ceiling light
- IP44 protected against moisture
- Dimmable as standard
- Lamp not included

✓ JC52028



CODE

JC52028

DESCRIPTION

Bodo wall light

LAMP

Halogen energy saver 33W

Dorchester Wall Light

Halogen bathroom wall and ceiling light



2 year
Product guarantee



Dimmable
As standard

- IP44 protected against moisture
- Dimmable as standard
- Lamp not included

CLASSIFICATION

⚡ Class 1
IP44 | 240V | Zone 2

LAMP (NOT INCLUDED)

Halogen energy saver, 33W G9

FINISH

Chrome



CONSTRUCTION

Body - Mild steel/plated
Diffuser - Frosted glass/tempered

✓ JC52024



CODE


JC52024

DESCRIPTION

Dorchester double wall light

LAMP

Halogen energy saver 33W x 2



CLASSIFICATION

Class 1 ⚡
IP44 | 240V | Zone 2

LAMP (INCLUDED)



TC-L 18W 2G11 3000K CRI:Ra (85)
TC-L 24W 2G11 3000K CRI:Ra (85)

FINISH


Chrome




CONSTRUCTION

Body - Steel
Diffuser - Opal acrylic

JC52026



JC52027



Berkeley Wall Light

Fluorescent bathroom wall lights



2 year
Product guarantee

- IP44 protection against moisture
- Lamps included

✓ JC52026



✓ JC52027



CODE

JC52026
JC52027

DESCRIPTION

Berkeley low energy wall light
Berkeley low energy wall light

LAMP

TC-L 24W
TC-L 18W