

12

Bollards



210
NITELED™
ROUND BOLLARD



211
NITELED™
SQAUARE BOLLARD




212
NITELED™
CURVE BOLLARD



213
NITELED™
SLIM BOLLARD



214
NITELED™
DOME BOLLARD



215
NITELED™
DOME BOLLARD



216
NITELED™
DOME BOLLARD



217
NITELED™
DOME BOLLARD



219
NITELED™
FLAT TOP BOLLARD



220
NITELED™
ROUND TOP BOLLARD



221
NITELED™
ROUND TOP BOLLARD

NiteLED Round Bollard

High efficiency LED exterior lighting



2 year
Product guarantee



More options
See page 145

- LED bollard with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 6W LED
- External base fixing for faster installation
- Durable aluminium construction
- Integral LED driver
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39404



CLASSIFICATION

⊕ Class 1
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION


Body - Aluminium
Diffuser - Opal polycarbonate



MATCHING WALL LIGHT

See page 145

CODE	DESCRIPTION	WATT	LUMENS
JC39404	NiteLED™ Round Bollard 800mm	6W	300
JC39412	NiteLED™ root mounting kit for round bollard	-	-

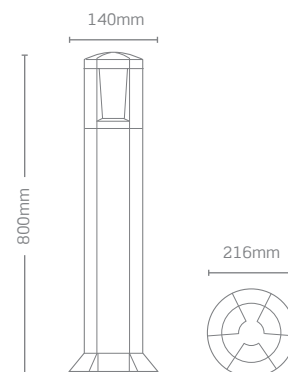

CLASSIFICATION

Class 1 ⚡
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite




CONSTRUCTION

Body - Aluminium
Diffuser - Opal polycarbonate



MATCHING WALL LIGHT

See page 145

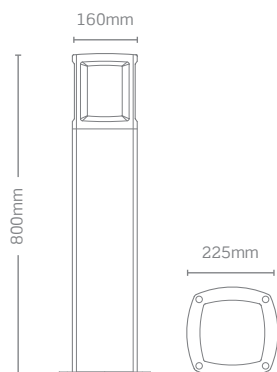

NiteLED Square Bollard

High efficiency LED exterior lighting



2 year
Product guarantee



More options
See page 145

- LED bollard with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 6W LED
- External base fixing for faster installation
- Durable aluminium construction
- Integral LED driver
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39405



CODE	DESCRIPTION	WATT	LUMENS
JC39405	NiteLED™ Round Bollard 800mm	6W	300
JC39413	NiteLED™ root mounting kit for square bollard	-	-

NiteLED Curve Bollard

High efficiency LED exterior lighting

-  **2 year**
Product guarantee
-  **More options**
See page 146

- LED bollard with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 5W LED
- External base fixing for faster installation
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39402



✓ JC39401



CODE	DESCRIPTION	WATT	LUMENS
JC39401	NiteLED™ Curve Bollard 800mm	5W	350
JC39402	NiteLED™ Curve Bollard 1000mm	5W	350

CLASSIFICATION

⊕ Class 1
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION


Body - Aluminium
Diffuser - Frosted polycarbonate




MATCHING WALL LIGHT

See page 146


JC39401



JC39402



CLASSIFICATION

Class 1 
IP54 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Anthracite



CONSTRUCTION


Body - Aluminium
Diffuser - Frosted polycarbonate



MATCHING WALL LIGHT

See page 147

JC39403



NiteLED Slim Bollard

High efficiency LED exterior lighting



2 year
Product guarantee



More options
See page 147

- LED bollard with matching colour temperature and finish to the NiteLED™ range
- Ultra low energy 6W LED
- Internal base fixing for faster installation
- Durable aluminium construction
- Instant start up, no warm up time
- Zero maintenance, no need to relamp

✓ JC39403



CODE

JC39403

DESCRIPTION

NiteLED™ Slim Bollard 850mm

WATT

6W

LUMENS

420

NiteLED Dome Bollard

High efficiency LED exterior lighting



2 year
Product guarantee



More options
See page 153

- Direct 42W halogen GLS replacement
- Over 75% energy saving
- 8.5W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Instant start up, no warm up time
- Plain diffuser for a wider spread of light
- Modern bollard range, ideal for both domestic and commercial amenity lighting

CLASSIFICATION

Class 1
IP44 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Black



CONSTRUCTION

Body - Die-cast aluminium
Diffuser - Opal polycarbonate



MATCHING WALL LIGHT

See page 153



JC39425BLK



JC39426BLK




JC39427BLK

CODE	DESCRIPTION	WATT	LUMENS
JC39425BLK	NiteLED™ Dome Bollard short plain	8.5W	200
JC39426BLK	NiteLED™ Dome Bollard medium plain	8.5W	200
JC39427BLK	NiteLED™ Dome Bollard tall plain	8.5W	200
JC39224	Root mounting kit	-	-


JC39427BLK




JC39224




JC39425BLK



JC39426BLK



CLASSIFICATION

Class 1 
IP44 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Black



CONSTRUCTION

Body - Die-cast aluminium
Diffuser - Opal polycarbonate




MATCHING WALL LIGHT

See page 153


JC39424BLK




JC39224



JC39422BLK



JC39423BLK



NiteLED™ Dome Bollard

High efficiency LED exterior lighting



2 year
Product guarantee



More options
See page 153

- Direct 42W halogen GLS replacement
- Over 75% energy saving
- 8.5W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Instant start up, no warm up time
- Louvered diffuser configuration ideal for highlighting in car parks and illuminating walkways
- Modern bollard range, ideal for both domestic and commercial amenity lighting



JC39422BLK



JC39423BLK



JC39424BLK

CODE	DESCRIPTION	WATT	LUMENS
JC39422BLK	NiteLED™ Dome Bollard short louvred	8.5W	200
JC39423BLK	NiteLED™ Dome Bollard medium louvred	8.5W	200
JC39424BLK	NiteLED™ Dome Bollard tall louvred	8.5W	200
JC39224	Root mounting kit	-	-

NiteLED Dome Bollard

High efficiency LED exterior lighting

-  **2 year**
Product guarantee
-  **More options**
See page 152

- Direct 42W halogen GLS replacement
- Over 75% energy saving
- 8.5W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Louvered diffuser configuration ideal for highlighting in car parks and illuminating walkways
- High grade AISI 316L stainless steel is weather resistant and requires little maintenance to keep its brilliant appearance
- Installation is made easier with the root mounting kit



JC39423SS



JC39422SS

CODE	DESCRIPTION	WATT	LUMENS
JC39422SS	NiteLED™ Dome Bollard short plain	8.5W	200
JC39423SS	NiteLED™ Dome Bollard medium plain	8.5W	200
JC39224	Root mounting kit	-	-

CLASSIFICATION

⊕ Class 1
IP44 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Stainless steel




CONSTRUCTION

Body - AISI 316L Stainless steel
Diffuser - Opal polycarbonate




MATCHING WALL LIGHT
See page 152


JC39224




JC39423SS



JC39422SS



CLASSIFICATION

Class 1 
IP44 | 240V

LED



4000K | CRI: Ra (80)

FINISH

Stainless steel



CONSTRUCTION


Body - AISI 316L Stainless steel
Diffuser - Opal polycarbonate




MATCHING WALL LIGHT

See page 152


JC39224



JC39425SS



JC39426SS



NiteLED™ Dome Bollard

High efficiency LED exterior lighting



2 year
Product guarantee



More options
See page 152

- Direct 42W halogen GLS replacement
- Over 75% energy saving
- 8.5W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Plain diffuser for wider spread of light
- High grade AISI 316L stainless steel is weather resistant and requires little maintenance to keep its brilliant appearance
- Installation is made easier with the root mounting kit



JC39426SS



JC39425SS

CODE	DESCRIPTION	WATT	LUMENS
JC39425SS	NiteLED™ Dome Bollard short louvred	8.5W	200
JC39426SS	NiteLED™ Dome Bollard medium louvred	8.5W	200
JC39224	Root mounting kit	-	-

NiteLEDTM Bollards

High output round top and flat top bollards

EFFICIENT

17W LED

TOTAL WATTAGE

UP TO

85 LPCW

LUMENS PER CIRCUIT WATT

UP TO

1450

LUMENS




Wide symmetrical light distribution

NiteLEDTM round top and flat top bollards diffuse light wide and symmetrically, using the internal LED cone reflector. This makes it ideal for walkways, car parks & residential applications

High 60% energy saving against 42W GLS

The high performance LED modules in NiteLEDTM bollards eliminates maintenance and significantly reduces energy consumption.

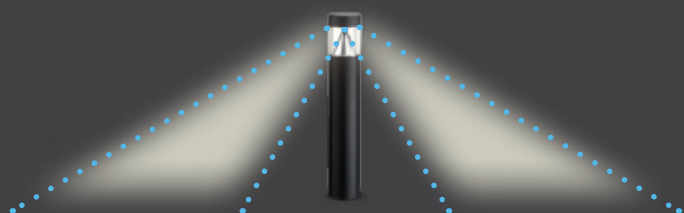


GLS Bollard equivalent

42W

NiteLEDTM Bollard

17W

CLASSIFICATION

Class 1 
IP65 | 240V

LED



5700K | CRI: Ra (80)

FINISH

Black



CONSTRUCTION

Body - Cast aluminium
Diffuser - Polycarbonate

NiteLED Flat Top Bollard

High output LED exterior lighting



2 year

Product guarantee



More options

See page 220-221

- Direct 42W halogen GLS replacement
- 60% energy saving
- 17W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Clear diffuser for wider spread of light
- Installation is made easier with the standard root mounting kit supplied
- Optional commercial root mounting kit (JC39444)



JC39443BLK

JC39443

JC39444

Ø188mm



Ø180mm

1060mm



190mm

220mm

400mm

220mm

400mm

220mm

400mm

220mm

400mm

220mm

400mm

220mm

CODE

JC39443BLK

JC39444

DESCRIPTION

NiteLED™ Flat Top Bollard

Commercial root mounting kit

WATT

17W

-

LUMENS

1450

-

NEW
PRODUCT

Available Nov '16

NiteLED™ Round Top Bollard

NEW
PRODUCT

Available Nov '16

High output commercial LED bollard



5 year*
Product guarantee



More options
See page 219 & 221

- Direct 42W halogen GLS replacement
- 60% energy saving
- 17W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Clear diffuser and cone reflector for wider spread of light
- Installation is made easier with the standard root mounting kit supplied
- Optional commercial root mounting kit (JC39444)



JC39442BLK

CLASSIFICATION

Class 1
IP65 | 240V

LED



5700K | CRI: Ra (80)

FINISH

Black




CONSTRUCTION

Body - Cast aluminium
Diffuser - Polycarbonate

JC39444

JC39442

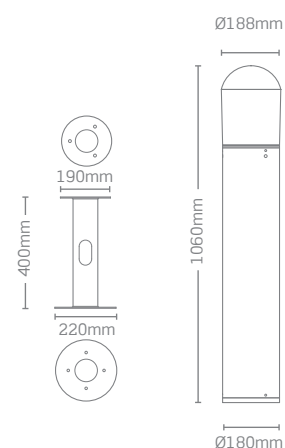

CODE	DESCRIPTION	WATT	LUMENS
JC39442BLK	NiteLED™ Round Top Bollard	17W	1450
JC39444	Commercial root mounting kit	-	-

* 5 Year extended warranty on LED module only, 2 year warranty on body

CLASSIFICATION

Class 1 ⚡
IP65 | 240V

LED



5700K | CRI: Ra (80)

FINISH

Stainless steel



CONSTRUCTION

Body - Stainless Steel
Diffuser - Polycarbonate

NiteLED™ Round Top Bollard

NEW
PRODUCT

Available Nov '16

High output commercial LED bollard



5 year*

Product guarantee



More options

See page 219-220

- Direct 42W halogen GLS replacement
- 60% energy saving
- 17W mains driven LED, no driver required
- Zero maintenance, no need to relamp
- Clear diffuser and cone reflector for wider spread of light
- Installation is made easier with the standard root mounting kit supplied
- Optional commercial root mounting kit (JC39444)



JC39442SS

JC39442

JC39444

Ø188mm



Ø180mm



190mm



220mm

400mm

CODE

DESCRIPTION

WATT

LUMENS

JC39442SS

NiteLED™ Round Top Bollard

17W

1450

JC39444

Commercial root mounting kit

-

-

* 5 Year extended warranty on LED module only, 2 year warranty on body

+44 (0)1243 838999

Bollards

221