





Cable trunking GF & GF-DIN-SH

with slots and base punching (DIN 43659)

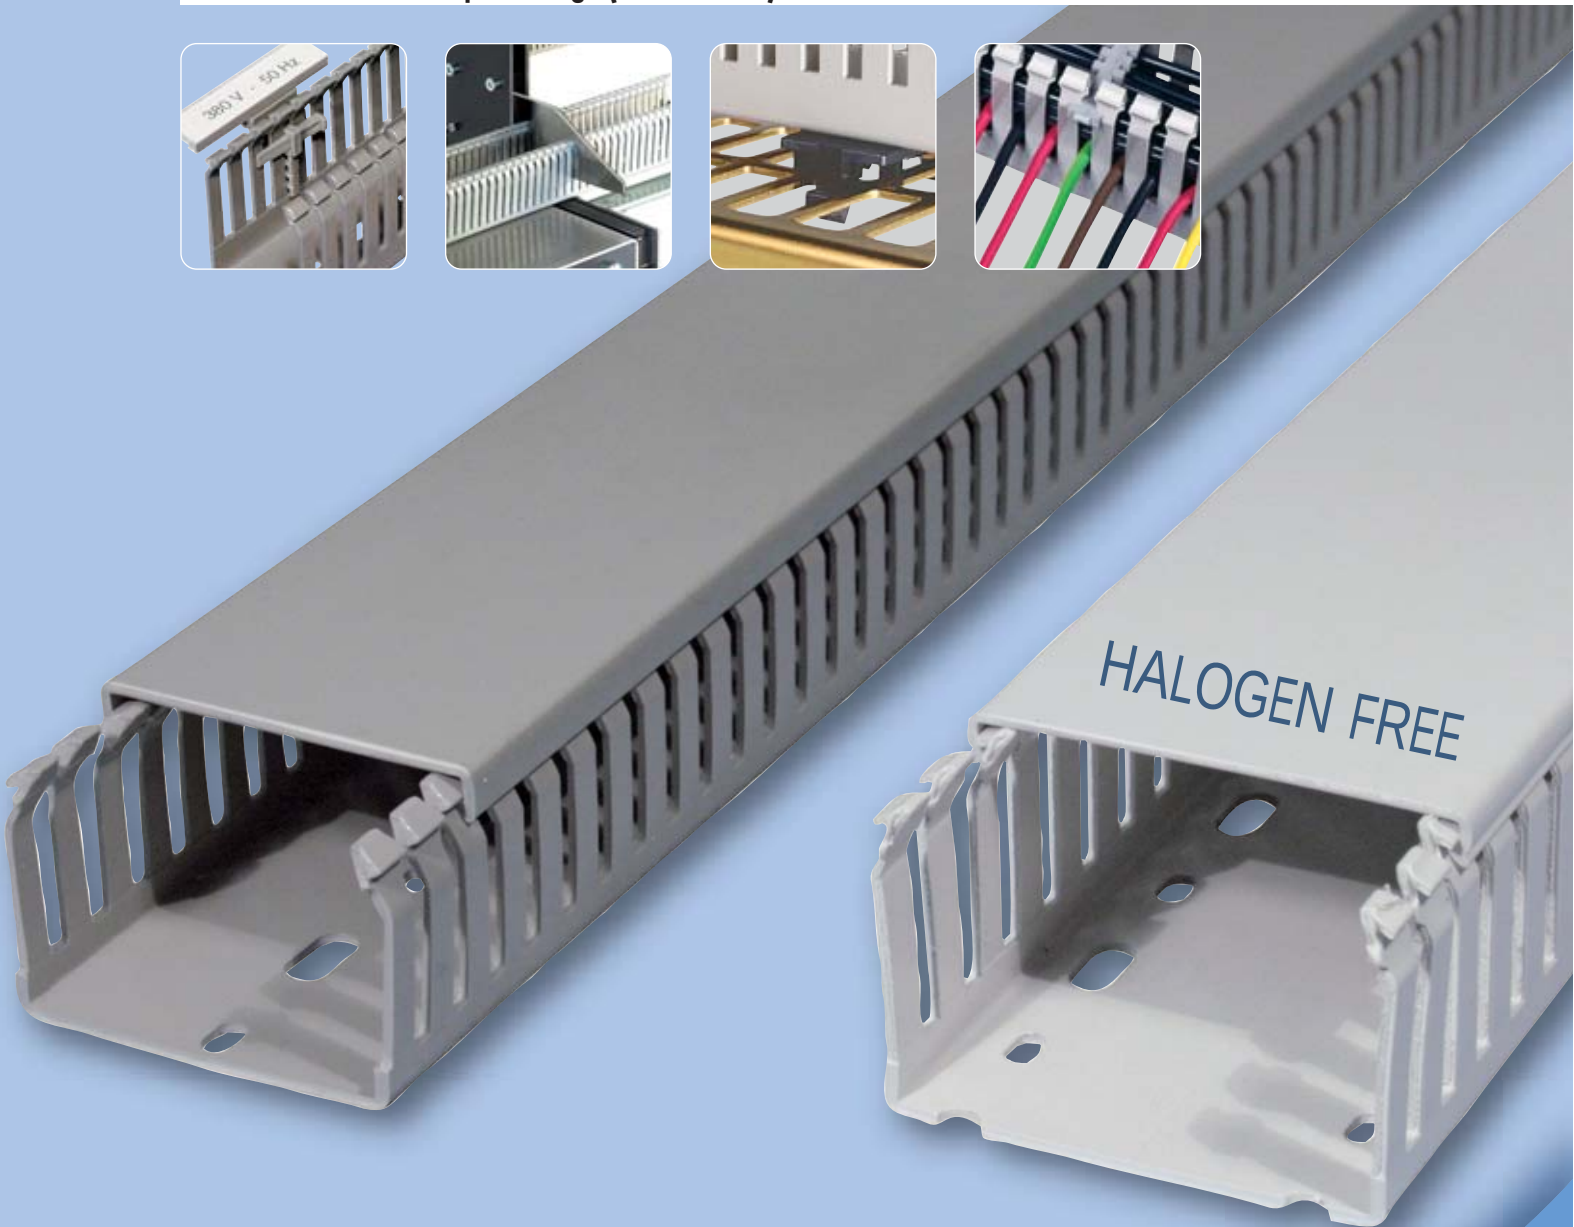




Cable trunking GF & GF-DIN-SH

with slots and base punching (DIN 43659)

GF-A6/4

Material:	rigid PVC quality 9051
Colour:	grey RAL7030
Operating temperatures:	-5 to +65°C
Density:	1,56
Volume resistivity:	10 ¹⁵ Ω.cm
Dielectric strenght:	15 kV/mm
Specifications:	V0 UL94 CSTB:M2
Standard length:	2 meters
Double sided adhesive:	upon request
Minimum delivery:	1 complete packing (with lids)

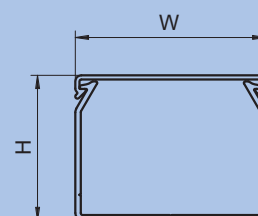


type	trunking			outside dim.		cables per trunking (filling 50 %)			lids (alone)	
	art. no.	m		H mm	W mm	1 mm ²	1,5 mm ²	2,5 mm ²	art. no.	m
GF-A6/4 23x 30	0845 0010 013	48		23	30	36	29	24	0845 0610 013	24
GF-A6/4 23x 43	0845 0020 013	24		23	43	55	45	38	0845 0615 013	24
GF-A6/4 25x 20	0845 0030 013	48		25	20	25	21	17	0845 0605 013	48
GF-A6/4 35x 20	0845 0040 013	48		35	20	38	31	26	0845 0605 013	48
GF-A6/4 35x 30	0845 0050 013	48		35	30	59	49	41	0845 0610 013	24
GF-A6/4 35x 43	0845 0060 013	24		35	43	91	75	62	0845 0615 013	24
GF-A6/4 42x 20	0845 0070 013	48		42	20	46	38	31	0845 0605 013	48
GF-A6/4 42x 30	0845 0080 013	48		42	30	73	60	50	0845 0610 013	24
GF-A6/4 42x 43	0845 0090 013	24		42	43	111	91	76	0845 0615 013	24
GF-A6/4 42x 60	0845 0100 013	24		42	60	160	132	110	0845 0620 013	24
GF-A6/4 42x 80	0845 0110 013	24		42	80	219	180	150	0845 0625 013	24
GF-A6/4 42x120	0845 0120 013	12		42	120	336	276	231	0845 0635 013	12
GF-A6/4 50x 30	0845 0130 013	48		48,5	30	85	70	59	0845 0610 013	24
GF-A6/4 50x 43	0845 0140 013	24		48,5	43	130	107	89	0845 0615 013	24
GF-A6/4 50x 60	0845 0150 013	24		48,5	60	188	154	129	0845 0620 013	24
GF-A6/4 60x 20	0845 0160 013	48		60	20	67	55	46	0845 0605 013	48
GF-A6/4 60x 30	0845 0170 013	48		60	30	108	89	74	0845 0610 013	24
GF-A6/4 60x 43	0845 0180 013	24		60	43	164	134	112	0845 0615 013	24
GF-A6/4 60x 60	0845 0190 013	24		60	60	236	194	162	0845 0620 013	24
GF-A6/4 60x 80	0845 0200 013	24		60	80	322	264	221	0845 0625 013	24
GF-A6/4 60x100	0845 0204 013	24		60	100	403	331	277	0845 0630 013	12
GF-A6/4 60x120	0845 0210 013	12		60	120	493	405	338	0845 0635 013	12
GF-A6/4 80x 30	0845 0220 013	24		80	30	143	118	98	0845 0610 013	24
GF-A6/4 80x 43	0845 0230 013	24		80	43	218	179	150	0845 0615 013	24
GF-A6/4 80x 60	0845 0240 013	24		80	60	216	260	217	0845 0620 013	24
GF-A6/4 80x 80	0845 0250 013	24		80	80	431	354	296	0845 0625 013	24
GF-A6/4 80x100	0845 0254 013	12		80	98	531	436	365	0845 0630 013	12
GF-A6/4 80x120	0845 0260 013	12		80	120	662	544	454	0845 0635 013	12
GF-A6/4 100x 30	0845 0280 013	24		100	30	175	144	120	0845 0610 013	24
GF-A6/4 100x 60	0845 0290 013	24		100	60	392	322	269	0845 0620 013	24
GF-A6/4 100x 80	0845 0300 013	12		100	80	537	441	369	0845 0625 013	24
GF-A6/4 100x100	0845 0270 013	12		100	100	671	551	461	0845 0630 013	12
GF-A6/4 100x150	0845 0271 013	12		100	150	1043	856	716	0845 0636 013	12

GF-DIN-SH-A7/5

Material:	polyphenylene ether, modified (PPE/PS)
Colour:	light grey RAL7035
Operating temperatures:	-25 to +70°C
Volume resistivity:	10 ¹⁵ Ω.cm
Dielectric strength:	16 kV/mm
Specification:	V1 UL94
Recommendations:	no contact with oils or greases
Standard length:	2 meters
Double sided adhesive:	upon request
Minimum delivery:	1 complete packing (with lids)



type	trunking			outside dim.		cables per trunking (filling 50 %)			lids (alone)	
	art. no.	m		H mm	W mm	1 mm ²	1,5 mm ²	2,5 mm ²	art. no.	m
GF-DIN-SH-A7/5 25x 25	0848 0031 013	48		23	23	25	21	17	0848 0640 013	12
GF-DIN-SH-A7/5 37,5x25	0848 0041 013	48		35,5	23	44	36	30	0848 0640 013	12
GF-DIN-SH-A7/5 37,5x37,5	0848 0051 013	24		35,5	35,5	74	61	51	0848 0645 013	12
GF-DIN-SH-A7/5 50x 25	0848 0131 013	48		48	23	62	51	42	0848 0640 013	12
GF-DIN-SH-A7/5 50x 37,5	0848 0141 013	24		48	35,5	104	85	71	0848 0645 013	12
GF-DIN-SH-A7/5 50x 50	0848 0151 013	24		48	48	146	120	100	0848 0650 013	12
GF-DIN-SH-A7/5 50x 75	0848 0152 013	24		48	73	230	189	158	0848 0655 013	12
GF-DIN-SH-A7/5 50x100	0848 0153 013	12		48	98	315	259	216	0848 0660 013	12
GF-DIN-SH-A7/5 75x 25	0848 0211 013	48		73	23	101	83	69	0848 0640 013	12
GF-DIN-SH-A7/5 75x 37,5	0848 0221 013	24		73	35,5	161	132	111	0848 0645 013	12
GF-DIN-SH-A7/5 75x 50	0848 0231 013	24		73	48	227	186	156	0848 0650 013	12
GF-DIN-SH-A7/5 75x 75	0848 0241 013	24		73	73	358	294	246	0848 0655 013	12
GF-DIN-SH-A7/5 75x100	0848 0251 013	12		73	98	489	402	336	0848 0660 013	12
GF-DIN-SH-A7/5 75x125	0848 0261 013	12		73	123	620	509	426	0848 0665 013	12

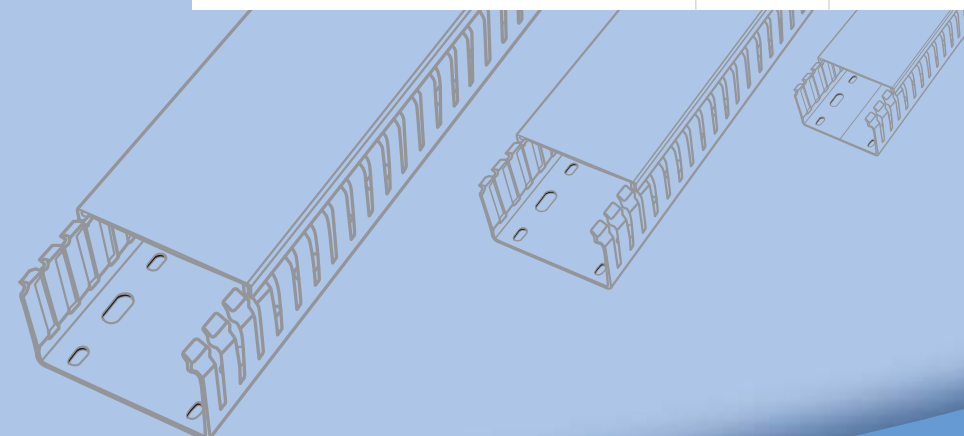



GF & GF-DIN-SH

Accessories and applications

Accessories for cable trunking

- **Rivets PLIO and rivet punches SES-GO**
for quick fastening of trunking and other products.
- **Lock stud PLIO-GZ**
for fast fixing of trunking GF to base plates or aluminium profiles.
- **Clamping bracket PLIO-GZ**
for clamping to rails, profiles or perforated base plates.
- **Retaining clip PLIO-GX**
stops cables from falling and allows the lids a better hold.
- **Bridging clip PLIO-GX**
keeps cable secure in the trunking and allows complete or partial change of cabling at any time without removal of clip.
- **Label holder PLIO**
to identify cable outlets.
- **Cutter DC 125**
for fast cutting of trunking at true angles.



Applications

