


Lytespan 3 Three Circuit Track System – Track Units

Standard Track Unit

- For single or continuous runs and grids
- Ideal for surface mounting or suspension
- Order components and accessories separately

Recessed Track Unit

- For single or continuous runs
- Ideal for suspended ceilings
- Order components and accessories separately



1. Standard Track Unit

Length	White	Silver	Black	
1m	2020760	2020761	2025500	0.90kg
2m	2020762	2020763	2025501	1.80kg
3m	2020751	2020759	2025502	2.70kg
4m	2020787	2020788	2025503	3.60kg




1. Recessed Track Unit


Length	White	
2m	2020718	1.95kg
3m	2020719	2.85kg
4m	2020720	3.75kg

Basic components required for a track scheme:

1. Track Unit
2. Live Feed: Feeds power onto track
3. Coupler: Only required if creating runs
4. End Cap: Safely terminates track ends
5. Suspensions: Safely and securely mounts track **Optional Accessories**



Standard

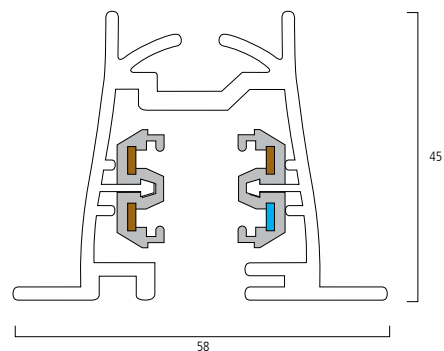

Recessed