

SPECIFICATION SHEET

BASTION LED NON-CORROSIVE FITTINGS



The new waterproof LED Non-Corrosive range, with a streamlined body, quick terminal connector and multiple entry options.

Applications:

• Commercial Kitchens • Commercial Sites • Factories



Image shown NCF535


Specification

LED:	72-192pcs of 0.2W 2835
Material:	ABS and polycarbonate
Colour Temperature:	4000K
Guarantee:	3 Years
Life Expectancy:	30,000 Hours
Working Temperature:	-10°C - 40°C / 0°C - 40°C for EM
Power Factor:	0.5 / 0.9
Beam Angle:	120°
CRI:	80 Ra

Additional Information

- 6/10/12 Diffuser clips included. 90lm/W. Grey finish.
- Microwave Sensor (WFLEDMS / MSLEDEXT) available.
- Mounting bracket included. Ni-Cd Battery included with emergency versions. Opal diffuser. Painted Metal LED tray included. Screws included.

Dimensions

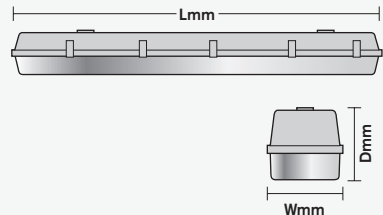

Code	Wattage	Emergency	Lumen Output	Dimenisons (L x W x D mm)
NCF212	12W	No	1080lm	600 x 95 x 75
NCF212E	12W	Yes	1080lm (90lm in EM mode)	600 x 95 x 75
NCF224	24W	No	2160lm	600 x 95 x 75
NCF224E	24W	Yes	2160lm (180lm in EM mode)	600 x 95 x 75
NCF425	25W	No	2250lm	1200 x 95 x 75
NCF425E	25W	Yes	2250lm (180lm in EM mode)	1200 x 95 x 75
NCF450	50W	No	4500lm	1200 x 95 x 75
NCF450E	50W	Yes	4500lm (360lm in EM mode)	1200 x 95 x 75
NCF535	35W	No	3150lm	1500 x 95 x 75
NCF535E	35W	Yes	3150lm (270lm in EM mode)	1500 x 95 x 75
NCF570	70W	No	6300lm	1500 x 95 x 75
NCF570E	70W	Yes	6300lm (450lm in EM mode)	1500 x 95 x 75