



EFDTMPRO

Push Fit Terminal Block
for Faster, **TOOL FREE**
Installation




AIR LEAKAGE
(excluding
adjustable)

Driver with push fit loop in/
loop out terminals suitable
for use with solid or
stranded cable



Insulation coverable
300mm fibre based

- No accessory required
- No insulation cut-out required

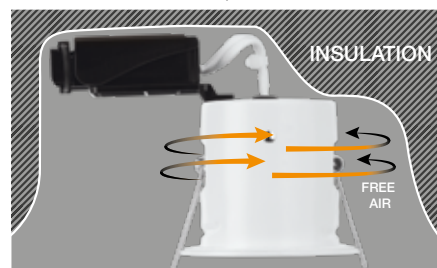

Twist&LockTM

Fixed, Adjustable & IP Rated Bezels

5 Year Warranty

White, Matt White, Polished
Chrome & Satin Nickel
bezel finish options



works with


.light

Smart
Tuneable GU10
See pg.21




.control



Dimmable
Standard GU10
PLUS
Triac Inline Dimmer
See pg.31



OR
Smart Rotary Dimmer
See pg.25



Non-Dimmable
Standard GU10
PLUS
On/Off Relay
See pg.37



EN-DLM981X
(H) 107mm Height
(OD) 90mm Overall (Ø)
EN-DLM982X
(H) 120mm Height
(OD) 102mm Overall (Ø)

EFDTM PRO

make smart with



See pg.218-219 for compatibility table

Interchangeable bezels for fixed version use EN-DLM981X & EN-BZ91

Interchangeable bezels for adjustable version use EN-DLM982X & EN-BZ92

Interchangeable bezels for IP65 rated version use EN-DLM981X & EN-BZ93

Fitted with push-fit terminal block for faster installation

Fibre based insulation coverable - up to 300mm (LED lamps only)

Tested in 30, 60 and 90-minute fire rated ceilings

Smart
Lamp options
See pg.21



Standard
Lamp options
See pg.95



See luminaire lamp compatibility on pg.227



Fixed



Adjustable



IP65



AIR leakage
(excluding
adjustable)

Cat. No.	Input	Horz. Adj.	Cutout [Ø]
Fixed/IP65			
EN-DLM981X	240V	-	75mm
Adjustable			
EN-DLM982X	240V	20°	85mm
Bezels			
EN-BZ91*	EFD TM PRO 90mm Fixed Aluminium Downlight Bezel		
EN-BZ92*	EFD TM PRO 102mm Adjustable Aluminium Downlight Bezel		
EN-BZ93*	EFD TM PRO 90mm IP65 Aluminium Downlight Bezel		

*Add suffix **W**, **MW**, **PC** or **SN** for White, Matt White, Polished Chrome or Satin Nickel finishes.
Lamp not included



Fire Rated Downlights