

Skypack™ Quick Release 5ft

Intelligent press release design

- Intelligent press release buttons for simple installation
- Ultra efficient, up to 120 lumens per circuit Watt
- Suitable for temperatures -10°C to 50°C
- Press fit terminals, loop in loop out
- Rear and end conduit entry points
- Suspended LED tray for easy installation

NEW

New product
for 2018



3 year
ext. warranty*



Emergency
options available



Classification

⚡ Class 1

IP20 | 240V

(Emergency versions consume
2W when charging)

LED

4000K | CRI: Ra (80)

Finishes


White

Construction

Body: Steel

Diffuser: Polycarbonate

JC71743 / JC71744

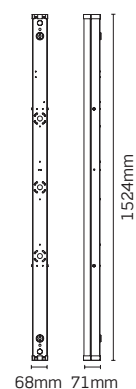

Code	Description	Col temp.	Dim.	Watt	Lumens	LpcW
JC71743	Skypack QR 5ft single	4000K	No	37W	4440	120
JC71743EM	Skypack QR 5ft single emergency	4000K	No	39W	4440	113
JC71744	Skypack QR 5ft twin	4000K	No	60W	7200	120
JC71744EM	Skypack QR 5ft twin emergency	4000K	No	62W	7200	116

*Requires online registration.