



MRBLED / MRBLED6

Recessed LED Module Cat 2. Supplied complete with integrated LED light source. An ideal alternative to standard 4x18W fluorescent modular fittings. Long life, low maintenance. Fits all standard 15mm and 25mm ceiling grids. Suitable for 600mm x 600mm grid ceilings

Instant ignition, ideal for external sensors
Available in both 4000K cool white and 6000K daylight
3-year warranty
Non-dimmable
Emergency conversion kit available: **EMKIT** (not included)

MRBLED

Dimensions: L: 595mm W: 595mm D: 52mm
Lamp type: LED
Control gear: Constant current driver
Construction: Steel /Aluminium
Emergency option: Available with **EMKIT**

Code	Model	Lumens	Qty
MRBLED	32W 4000K	3200lm	1
MRBLED6	32W 6000K	3300lm	1




EMKIT CONVERTER

Dimensions: L: 218mm W: 105mm D: 44mm

Description: LED 3-hour emergency kit
Converts most constant current LED luminaires to 3-hour emergency 36V 50W max.
Pre-wired for quick installation
Adaptor leads included. Suitable for maintained or non-maintained use

Code	Model	Qty
EMKIT	Pre-wired LED 3-hour Emergency Kit	1

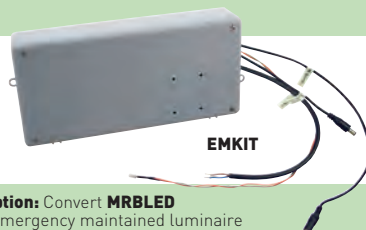

Emergency Option: Convert **MRBLED** into a 3-hour emergency maintained luminaire by using **EMKIT**

Suitable for 600mm x 600mm grid ceilings

