


WEATHERTIGHT METAL CLAD RANGE

ROUND PIN PLUGS & SOCKETS

Conformity to Standards:	BS546 / Walsall / Special	IEC 60529	Temperature resistance:	Operating	-25 to +50°C
	BS EN 60529			Storage	-30 to +70°C
	BS EN 60947-3 (15A)				
Protection Rating:	IP66		Cable entry	5A Plug:	M20 Threaded entry
Impact resistance:	>IK 06			15 & 30A Plugs & Switch Sockets:	M25 Threaded entry
Glow wire test:	850°C insert			Unswitched Sockets:	M20 Threaded entry
Breaker category:	AC21A/AC22A		Connecting sections of the wires	5A & 15A:	max: 4mm ²
				30A:	max: 6mm ²

IP66 Watertight round surface socket terminal/ through & plugs to suit

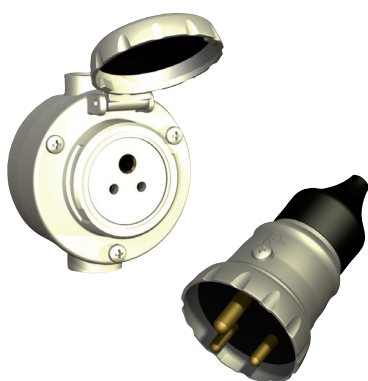


All metal construction


A	SOCKET ARR.	GAUGE	PLUG	SOCKET
5	2P+E	BS546	PD213/3PAM	PD213/3SAM
	2P+E	Walsall	PD84/3PAM	PD84/3SAM
	3P+E	Walsall	PD84/4PAM	PD84/4SAM
	3P+N+E	Special	PD84/5PAM	PD84/5SAM

A	SOCKET ARR.	GAUGE	PLUG	SOCKET
15	2P+E	BS546	PD160/3PAM	PD160/3SAM
	3P+E	Walsall B	PD160/4BPAM	PD160/4BSAM
	3P+N+E	Special	PD160/5PAM	PD160/5SAM


A	SOCKET ARR.	GAUGE	PLUG	SOCKET
30	2P+E	Special	PD930/3PAM	PD930/3SAM
	3P+E	Special	PD930/4PAM	PD930/4SAM

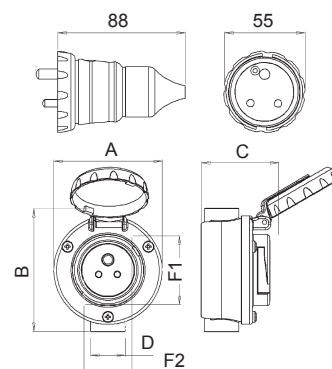

(A)	mm.					
	A	B	C	F1	F2	
5	77	87.5	55	34	24.5	
15	95	95	68	70	16.5	
30	95	95	76.5	70	16.5	



IP66 Watertight square surface socket terminal/ through & plug to suit



A	SOCKET ARR.	GAUGE	PLUG	SOCKET
15	2P+E	BS546	PDSQ160/3PAM	PDSQ160/3SAM

