
## Hamilton

## www.hamilton-litestat.com

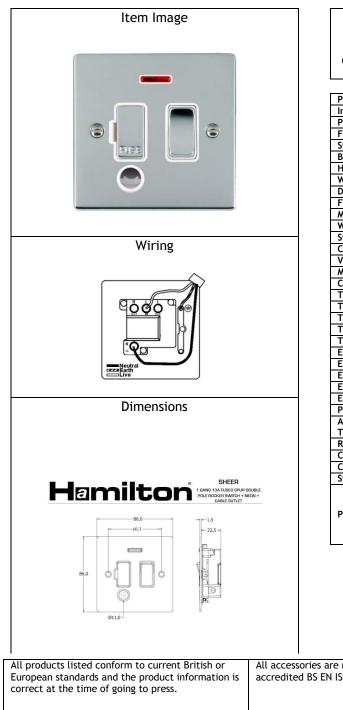

## 87 SPNC BC-W

Sheer Bright Chrome 1 gang 13A Fused Spur Double Pole and Neon and Cable Outlet. Standard Insert will be Bright Chrome with a White surround.

Insert TypeSwitched Fused Connection UnitsPlate FinishBright ChromeFrame FinishSingle ThromeSwitch ColourBright ChromeBody & Switch TrimWhiteHeightSingle = 86mmWidthSingle = 1.5mmDepthSingle = 1.5mmFixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmWattageSwitched PolesSwitched PolesDoubleCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 4Terminal Capacity 4Terminal Capacity 55 x 1.5mm2Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 51 x 6mm2Earth Terminal Capacity 61 x 6mm2Earth Terminal Capacity 73 x 2.5mm2Earth Terminal Capacity 75 x 1.5mm2Earth Terminal Capacity 71 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5* to +40°CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363Patents and TrademarksTrade Mark No. 2296586	Primary Range	Sheer	
Frame FinishFrame FinishSwitch ColourBright ChromeBody & Switch TrimWhiteHeightSingle = 86mmWidthSingle = 1.5mmFixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmMinimum Wall Box Depth35mmWattageSwitched PolesCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 4Earth Terminal Capacity 5Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 25 x 1.5mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Earth Terminal Capacity 61 x 6mm2Earth Terminal Capacity 75 x 1.5mm2Earth Terminal Capacity 71 x 6mm2Earth Terminal Capacity 75 x 1.5mm2Earth Terminal Capacity 71 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363			
Switch ColourBright ChromeBody & Switch TrimWhiteHeightSingle = 86mmWidthSingle = 86mmDepthSingle = 1.5mmFixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmMinimum Wall Box Depth35mmWattageSwitched PolesCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 4Earth Terminal Capacity 5Earth Terminal Capacity 55 x 1.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 55 x 1.5mm2Earth Terminal Capacity 61 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Standard/ApprovalBS 1363	Plate Finish	Bright Chrome	
Body & Switch TrimWhiteHeightSingle = 86mmWidthSingle = 86mmDepthSingle = 1.5mmFixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmWattageSwitched PolesCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 45 x 1.5mm2Terminal Capacity 5Earth Terminal Capacity 1Earth Terminal Capacity 55 x 1.5mm2Earth Terminal Capacity 65 x 1.5mm2Earth Terminal Capacity 75 x 1.5mm2Earth Terminal Capacity 65 x 1.5mm2Earth Terminal Capacity 75 x 1.5mm2Earth Terminal Capacity 83 x 2.5mm2Earth Terminal Capacity 95 x 1.5mm2Earth Terminal Capacity 91 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (min)0.75mm²Standard/ApprovalBS 1363	Frame Finish		
HeightSingle = 86mmWidthSingle = 86mmDepthSingle = 1.5mmFixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmMinimum Wall Box Depth35mmWattageSwitched PolesSwitched PolesDoubleCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Earth Terminal Capacity 4Earth Terminal Capacity 5Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 55Earth Terminal Capacity 65 x 1.5mm2Earth Terminal Capacity 75 x 1.5mm2Earth Terminal Capacity 61 x 6mm2Earth Terminal Capacity 72 x 4mm2 Multi-StrandEarth Terminal Capacity 65 x 1.5mm2Earth Terminal Capacity 73 x 2.5mm2Earth Terminal Capacity 61 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40°CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (min)0.75mm²Standard/ApprovalBS 1363	Switch Colour	Bright Chrome	
WidthSingle = 86mmDepthSingle = 1.5mmFixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmMinimum Wall Box Depth35mmWattageSommSwitched PolesDoubleCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Earth Terminal Capacity 4Earth Terminal Capacity 2Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Earth Terminal Capacity 65 x 1.5mm2Earth Terminal Capacity 75 x 1.5mm2Earth Terminal Capacity 61 x 6mm2Earth Terminal Capacity 71 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40°CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Body & Switch Trim	White	
DepthSingle = 1.5mmFixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmMinimum Wall Box Depth35mmWattage35mmSwitched PolesDoubleCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 4Terminal Capacity 4Terminal Capacity 5Earth Terminal Capacity 2Earth Terminal Capacity 45 x 1.5mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 45 x 1.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Height	Single = 86mm	
Fixing Hole CentresBox Fixing = 60.3mmBox Fixing = 60.3mmMinimum Wall Box Depth35mmWattage35mmSwitched PolesDoubleCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 4Terminal Capacity 4Terminal Capacity 5Earth Terminal Capacity 2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 45 x 1.5mm2Earth Terminal Capacity 55 x 1.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 55 x 1.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Width	Single = 86mm	
Minimum Wall Box Depth35mmWattageSwitched PolesCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 4Terminal Capacity 4Terminal Capacity 5Earth Terminal Capacity 2Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 4Terminal Capacity 4Terminal Capacity 5Earth Terminal Capacity 4Earth Terminal Capacity 45 x 1.5mm2Earth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Depth		
Minimum Wall Box Depth35mmWattageSwitched PolesCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 4Terminal Capacity 4Terminal Capacity 5Earth Terminal Capacity 2Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 4Terminal Capacity 4Terminal Capacity 5Earth Terminal Capacity 4Earth Terminal Capacity 45 x 1.5mm2Earth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Fixing Hole Centres	Box Fixing = 60.3mmBox Fixing = 60.3mm	
Switched PolesDoubleCurrent Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 4Earth Terminal Capacity 5Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 25 x 1.5mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 55 x 1.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm2Standard/ApprovalBS 1363	Minimum Wall Box Depth		
Current Rating13 AmpVoltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 41Terminal Capacity 51 x 6mm2Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 25 x 1.5mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Wattage		
Voltage220/250V ACMax load13 AmpContact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 41Terminal Capacity 51Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 25 x 1.5mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Switched Poles	Double	
Max load   13 Amp     Contact Gap Minimum   3mm     Terminal Capacity 1   3 x 2.5mm2     Terminal Capacity 2   2 x 4mm2 Multi-Strand     Terminal Capacity 3   1 x 6mm2     Terminal Capacity 4   1     Terminal Capacity 5   1     Earth Terminal Capacity 5   1     Earth Terminal Capacity 2   5 x 1.5mm2     Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2     Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363	Current Rating		
Contact Gap Minimum3mmTerminal Capacity 13 x 2.5mm2Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 41Terminal Capacity 51Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 25 x 1.5mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40° CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Voltage	220/250V AC	
Terminal Capacity 1   3 x 2.5mm2     Terminal Capacity 2   2 x 4mm2 Multi-Strand     Terminal Capacity 3   1 x 6mm2     Terminal Capacity 4	Max load	13 Amp	
Terminal Capacity 22 x 4mm2 Multi-StrandTerminal Capacity 31 x 6mm2Terminal Capacity 41Terminal Capacity 51Earth Terminal Capacity 16 x 1mm2Earth Terminal Capacity 25 x 1.5mm2Earth Terminal Capacity 33 x 2.5mm2Earth Terminal Capacity 42 x 4mm2 Multi-StrandEarth Terminal Capacity 51 x 6mm2Product Class 1Must be earthedAmbient Operating Temperature-5° to +40°CRecommended LocationIndoor use onlyCable outlet (min)0.75mm²Cable outlet (max)2.5mm²Standard/ApprovalBS 1363	Contact Gap Minimum	3mm	
Terminal Capacity 3   1 x 6mm2     Terminal Capacity 4   1     Terminal Capacity 5   1     Earth Terminal Capacity 1   6 x 1mm2     Earth Terminal Capacity 2   5 x 1.5mm2     Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating   -5° to +40° C     Temperature   -5° to -40° C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363	Terminal Capacity 1	3 x 2.5mm2	
Terminal Capacity 4     Terminal Capacity 5     Earth Terminal Capacity 1   6 x 1mm2     Earth Terminal Capacity 2   5 x 1.5mm2     Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating   -5° to +40° C     Temperature   -5° to some only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363	Terminal Capacity 2	2 x 4mm2 Multi-Strand	
Terminal Capacity 5     Earth Terminal Capacity 1   6 x 1mm2     Earth Terminal Capacity 2   5 x 1.5mm2     Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating Temperature   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363	Terminal Capacity 3	1 x 6mm2	
Earth Terminal Capacity 1   6 x 1mm2     Earth Terminal Capacity 2   5 x 1.5mm2     Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating Temperature   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363	Terminal Capacity 4		
Earth Terminal Capacity 2   5 x 1.5mm2     Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating Temperature   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363			
Earth Terminal Capacity 3   3 x 2.5mm2     Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating Temperature   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363	Earth Terminal Capacity 1	6 x 1mm2	
Earth Terminal Capacity 4   2 x 4mm2 Multi-Strand     Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating Temperature   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363	Earth Terminal Capacity 2	5 x 1.5mm2	
Earth Terminal Capacity 5   1 x 6mm2     Product Class 1   Must be earthed     Ambient Operating Temperature   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363			
Product Class 1   Must be earthed     Ambient Operating Temperature   -5° to +40°C     Recommended Location   Indoor use only     Cable outlet (min)   0.75mm²     Cable outlet (max)   2.5mm²     Standard/Approval   BS 1363		2 x 4mm2 Multi-Strand	
Ambient Operating Temperature -5° to +40°C   Recommended Location Indoor use only   Cable outlet (min) 0.75mm²   Cable outlet (max) 2.5mm²   Standard/Approval BS 1363		1 x 6mm2	
Temperature -5' to 440 C   Recommended Location Indoor use only   Cable outlet (min) 0.75mm <sup>2</sup> Cable outlet (max) 2.5mm <sup>2</sup> Standard/Approval BS 1363		Must be earthed	
Cable outlet (min) 0.75mm²   Cable outlet (max) 2.5mm²   Standard/Approval BS 1363		-5° to +40°C	
Cable outlet (max) 2.5mm²   Standard/Approval BS 1363	Recommended Location	Indoor use only	
Standard/Approval BS 1363	Cable outlet (min)	0.75mm <sup>2</sup>	
	Cable outlet (max)	2.5mm <sup>2</sup>	
Patents and Trademarks Trade Mark No. 2296586	Standard/Approval	BS 1363	
	Patents and Trademarks	Trade Mark No. 2296586	

**NS**SPlus

CERT. No. FM11238

All products listed conform to current British or European standards and the product information is correct at the time of going to press.	All accessories are manufactured under an accredited BS EN ISO 9001 : 2008 Quality System.	It is the policy of the company to continually improve products as part of our development programme. Therefore, we reserve the right to alter designs and dimensions without prior notice.
Illustrations and diagrams are reproduced within the limitations of reproductions and printing processes are not binding.	Due to manufacturing processes we cannot guarantee an exact colour match and shadings of certain finishes.	Correct as at August 2012 E&OE

R Hamilton & Co Ltd • Quarry Industrial Estate • Mere • Wiltshire • BA12 6LA • UK T: +44 (0)1747 860088 • F: +44 (0)1747 861032 • E: info@hamilton-litestat.com www.hamilton-litestat.com

Directors: R Hamilton • I Hamilton • RL Haines • CP Savory • AMH Hamilton (Secretary) Registered Office: Cedar House • Breckland • Linford Wood • Milton Keynes • MK14 6EX • Buckinghamshire Registered in London No. 941624 • VAT Registration No. 222 6607 84

