


Compact NS/NSX/NR/NSF/NSJ
FPower NSX / GV7
NG160 / Interpact INV - INS
EasyPact CVS100-630
 Auxiliary switches
 Contacts auxiliaires
 Contactos auxiliar



Schneider
Electric

00998202A 04

Schneider Electric Industries SAS
 35, rue Joseph Monier
 CS 30323
 F - 92506 Rueil Malmaison Cedex

www.schneider-electric.com



© 2011 Schneider Electric.
 All rights reserved.

IMPORTANT NOTE

- This device must be installed by a qualified electrician.
- We cannot accept any responsibility for failure to follow the instructions provided in this document.

REMARQUE IMPORTANTE




- L'installation de cet appareil doit être effectuée par des professionnels de l'électricité.
- Le non-respect des indications de la présente notice ne saurait engager la responsabilité du constructeur.

OBSERVACIÓN IMPORTANTE


- La instalación y mantenimiento de este aparato sólo debe ser realizado por electricistas profesionales.
- El fabricante no se hace responsable en caso de no cumplir con las indicaciones expuestas en este aviso.

重要注意事項












- 本装置必须由合格的电工进行安装。
- 我们不承担任何因未遵循本文档中的指南而导致的责任。

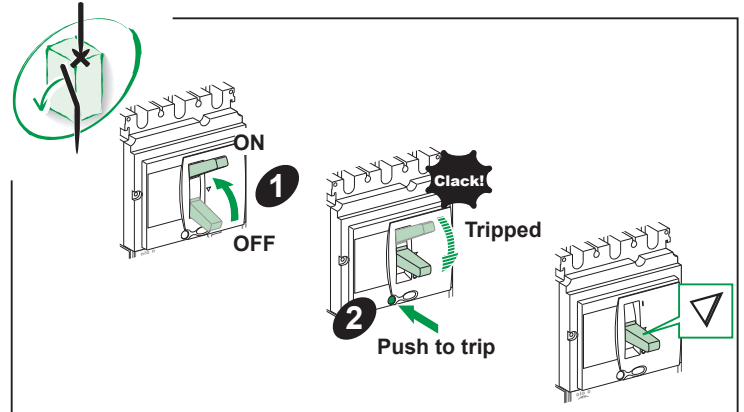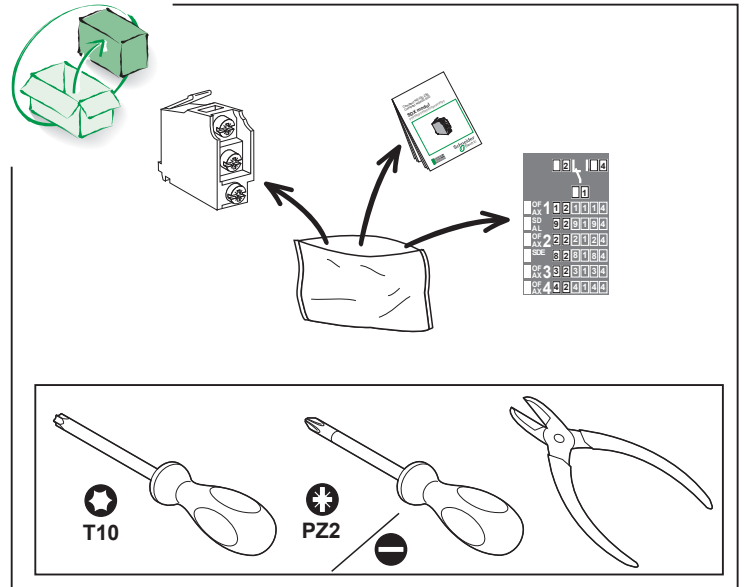

NS80H-MA
NG160





AX / AL
OF / SD

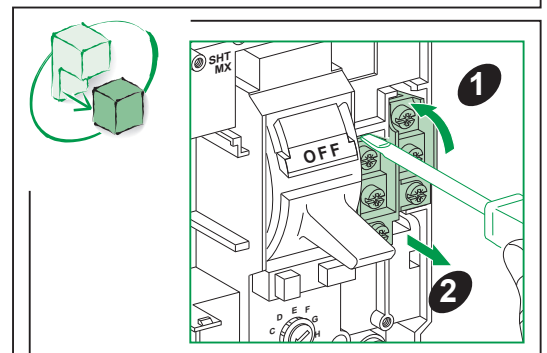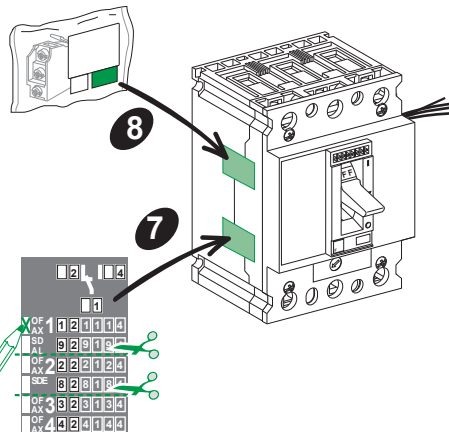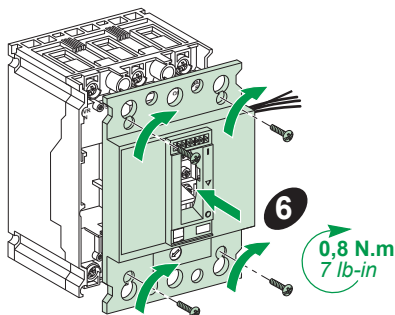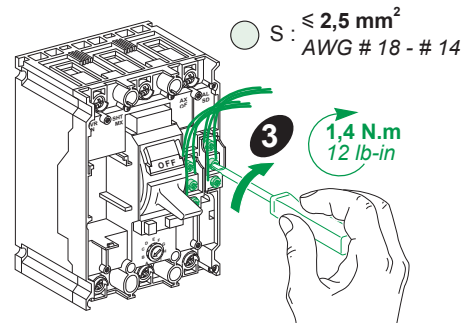

00998202A 04


1/4




NS/NSX100-250
NSF150-250





OAL
SDE




1

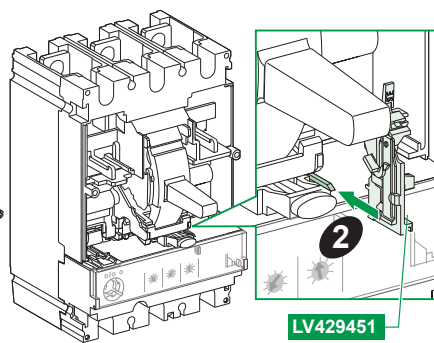

LV429451


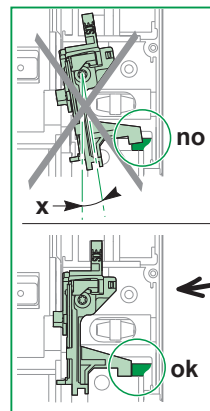


0,9 N.m
8 lb-in




Click!

4

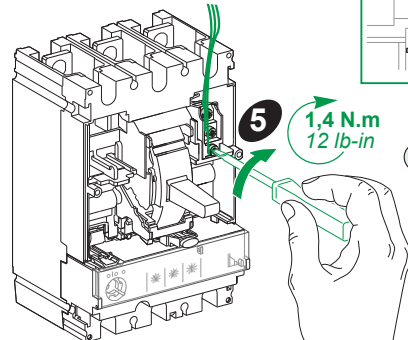


1,4 N.m
12 lb-in

S: $\leq 2,5 \text{ mm}^2$
AWG # 18 - # 14

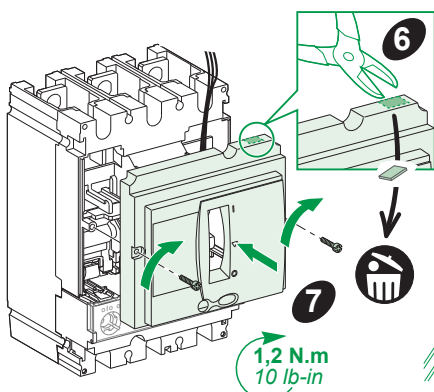


6

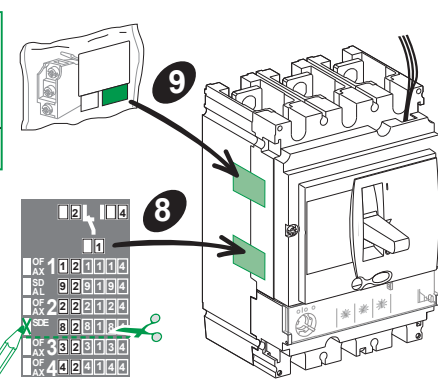

1,2 N.m
10 lb-in





8

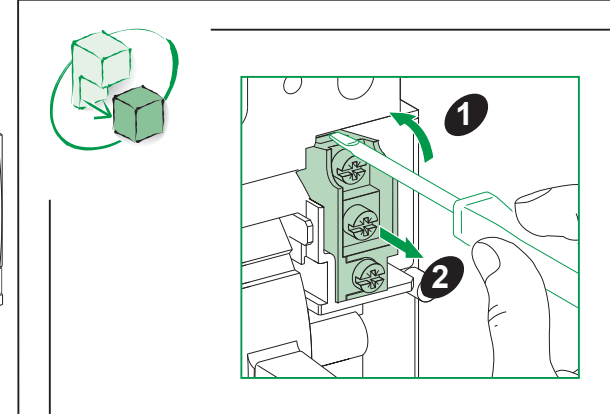


1


2




NS/NSX400-630
NSJ400-600



OAL
SDE

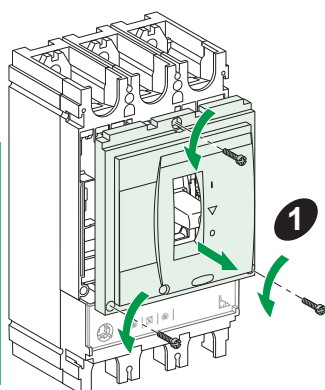


1

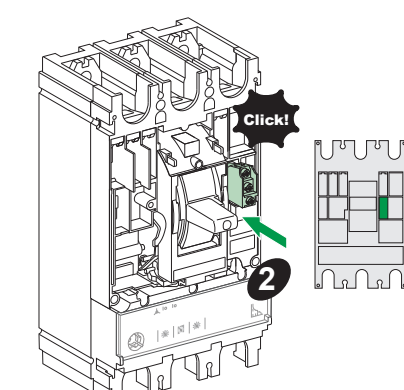


Click!

2

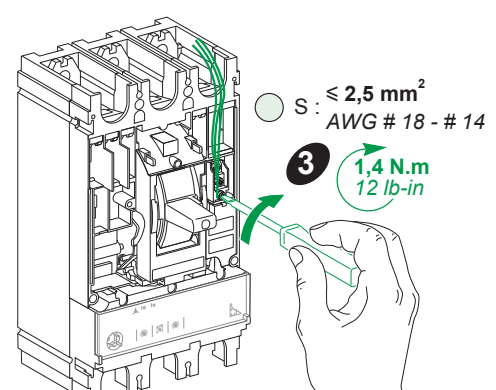


1,4 N.m
12 lb-in


S: $\leq 2,5 \text{ mm}^2$
AWG # 18 - # 14

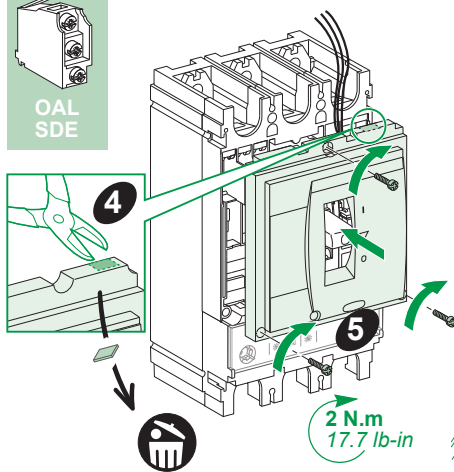


4

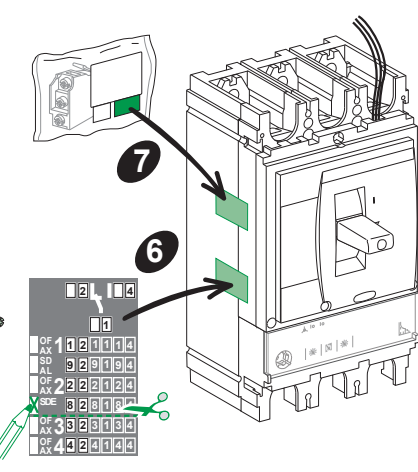

2 N.m
17.7 lb-in





6

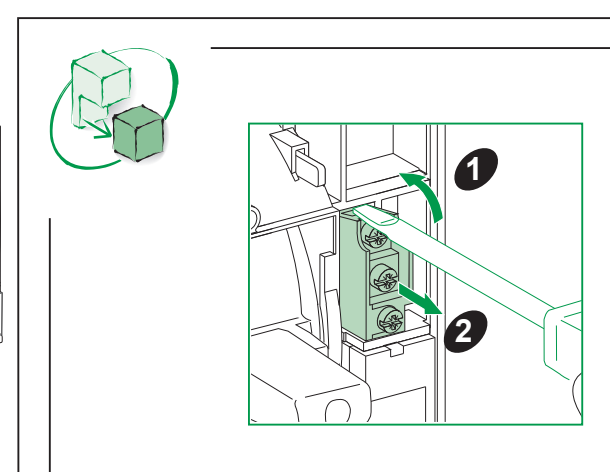


1

2



NS/NSX100-250
NSF150-250
NS/NSX400-630
NSJ400-600



SDV

