

3 Year Warranty

L70 30,000hrs

Microwave sensing option

Emergency option

Grey base, opal diffuser finish




works with

.control



On/Off Relay
See pg.47

16A

EN-ANT1525B



EN-ANT1558B

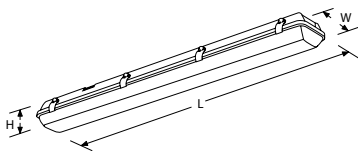

EN-ANT1217B

(L) 1270mm Length
(W) 85mm Width
(H) 80mm Height

EN-ANT1240B

(L) 1270mm Length
(W) 118mm Width
(H) 80mm Height

EN-ANT1525B

(L) 1570mm Length
(W) 85mm Width
(H) 80mm Height

EN-ANT1558B

(L) 1570mm Length
(W) 118mm Width
(H) 80mm Height

EN-ANT1834B

(L) 1870mm Length
(W) 85mm Width
(H) 80mm Height

EN-ANT1869B

(L) 1870mm Length
(W) 118mm Width
(H) 80mm Height

LinearPac™

IP65 LED Anti-Corrosives

make smart with



See pg.256-258 for compatibility table

Designed to directly replace single or twin lamp fluorescent fittings in size and output

Over 50% energy savings compared to traditional fluorescent

Clip in gear tray for ease of installation and maintenance

Fully polycarbonate diffuser and base (6ft base is ABS)

Stainless steel anti-tamper clips

2x IP65 rated cable glands supplied

20mm conduit entry at both ends and at the rear

Delivering up to 120lm/W

IP65 rated

IK08 rated impact resistance

Adjustable light detector from 2-50 lux for microwave option

Adjustable hold time of 5 seconds to 15 minutes for microwave option



Linears

Cat. No.	Type	Watts	Colour	Lumens	lm/W	T8 Subst.	Length (ft)
Single							
EN-ANT1217B*/40	Non-Dim	17W	4000K	2000lm	118	1 x 36	4
EN-ANT1525B*/40	Non-Dim	25W	4000K	3000lm	120	1 x 58	5
EN-ANT1834B*/40	Non-Dim	34W	4000K	3700lm	109	1 x 72	6
Twin							
EN-ANT1240B†/40	Non-Dim	40W	4000K	4400lm	110	2 x 36	4
EN-ANT1558B†/40	Non-Dim	58W	4000K	6600lm	114	2 x 58	5
EN-ANT1869B†/40	Non-Dim	69W	4000K	7700lm	112	2 x 72	6

*Add suffix **EM** for **Emergency** option.

†Add suffix **EM** or **MS** for **Emergency** or **Microwave Sensor** options.

