

## Moisture-proof diffuser luminaire

An IP65 rated LED luminaire for high quality low energy lighting in wet, dusty environments. High quality opal polycarbonate (UV stabilised) diffuser ensures uniform lighting without visible spots. High efficacy, up to 40% energy saving compared with T8 fluorescent. The traditional design gives an aesthetically pleasing appearance – ideal for point for point replacement on refurbishment projects.

3h emergency light.


Body: polycarbonate

Diffuser: opal polycarbonate (UV stabilised)


Brackets: stainless steel

Complete with 4000K LED, 4000lm. Class I electrical, IP65, IK08.

Weight: 1.96 kg

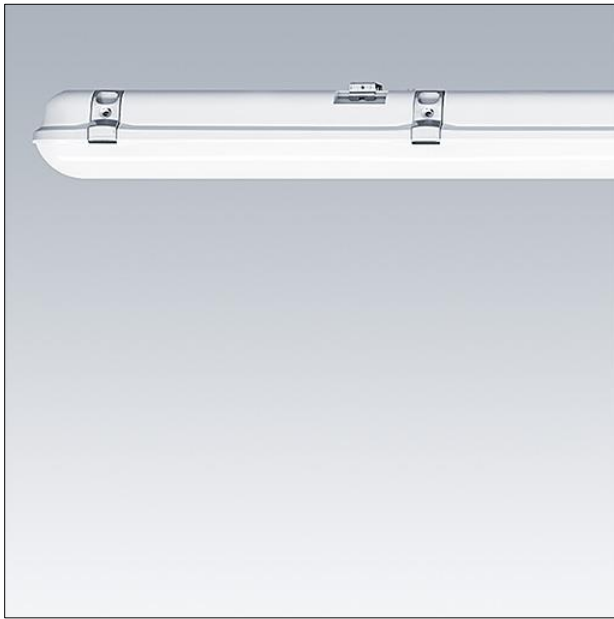


TE\_JULIE\_F\_side.jpg

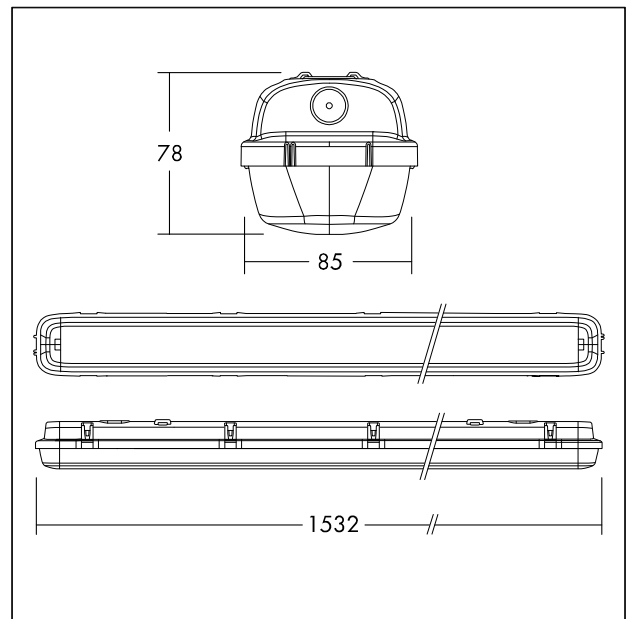

TE\_JULIE\_M\_IID2\_1500\_4000lm.wmf

## Light Distribution

## Emergency

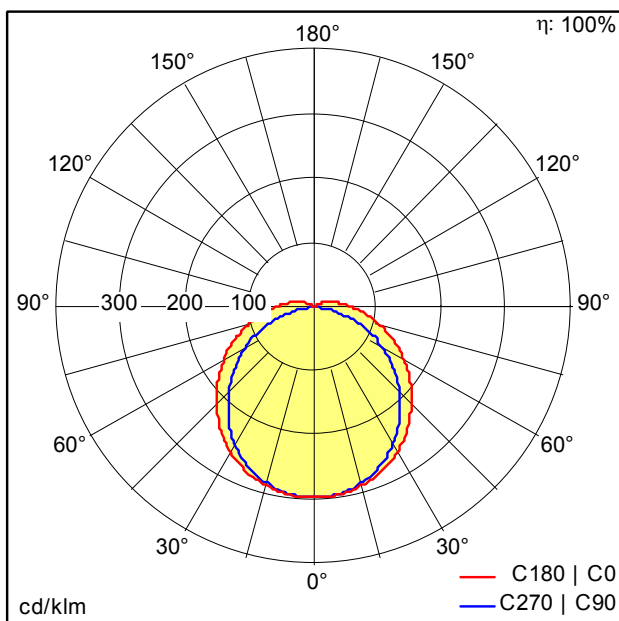

TE\_JULIE\_1500\_LED\_IP65\_4000\_840\_E3e.idt

- Light Source: LED
- Luminaire luminous flux\*: 474 lm
- Luminaire efficacy\*: 119 lm/W
- Colour Rendering Index min.: 80
- Chromaticity tolerance (initial MacAdam)\*: 4
- Rated median useful life\*: 50000h L70 at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 4 W