



## Product Information



# Pendant Sets

## Description

This moulded white wiring range is suited to new houses and retrofit installations, as well as commercial and industrial environments.

## Features

- 1.5m cord drop
- T2 rated lampholders
- short skirt B22 bayonet lampholders
- 3 terminals
- "Feet" on base to allow for uneven Artex ceilings and to reduce ceiling damage due to over tightening of the mounting screws *See fig 1*

### 10 year guarantee

### decorators cover

- Additional internal paintable cover preventing access to live parts during decoration

### low energy versions

- enables compliance with building regulations Part L1
- high frequency electronic control gear ensures quick flicker free starting
- suitable for 9W to 18W, 4pin lamps
- 2 year guarantee

### safety versions

- T2 rated lampholder
- 10 year guarantee

## Range

6" flex, T2 rated	V1280
6" flex with decorators cover, T2 rated	V1278
9" flex, T2 rated	V1283
ceiling rose, 3 in-line terminals, enlarged earth terminal	V1299
<i>low energy version</i>	
3" flex (equivalent to a standard 6" pendant)	V1400
<i>safety version</i>	
6" safety pendant	S105/6T2

## Standards

- BS EN 60598-1
- BS EN 60598-2-1
- BS 67 where applicable
- BS 4533 where applicable

## Technical Specification

No user serviceable parts

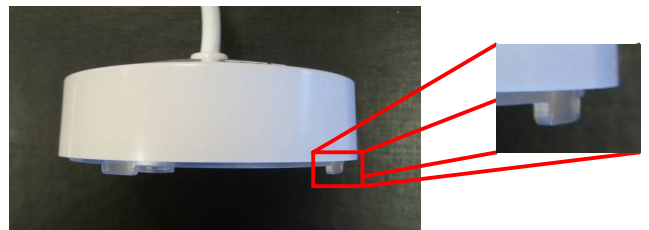


Fig 1

**DETA**

Kingsway House, Laporte Way  
Luton, Beds LU4 8RJ UK

Tel. +44 1582 544 500 Fax: +44 1582 544 501  
Technical Helpline +44 1582 544 548