


Plugs


- screwless
- with screw terminals

3

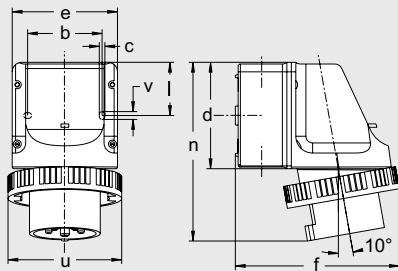


Amp.	16			32		
Poles	3	4	5	3	4	5
b	66,5	66,5	66,5	66,5	66,5	66,5
c	5	5	5	5	5	5
d	96	96	96	96	96	96
e	95	95	95	95	95	95
f	140	140	140	147	147	150
l	47,5	47,5	47,5	47,5	47,5	47,5
n	154	154	154	164	164	164
u	72	81	88	96	96	103
v	7	7	7	7	7	7
M	20/25	20/25	20/25	20/25	20/25	20/25

Wall mount appliance inlets,
internal fixing,
2 knock-out cable entries on top and bottom
1 knock-out entry in the back wall
IP 67



Amp.	63		
Poles	3	4	5
a	136	120	120
b	104	106	106
c	6	5,6	5,6
d	170	152	152
e	118	118	118
f	171	118	118
n	250	232	232
u	113	113	113
M	40	40	40


Wall mount appliance inlets,
external fixing,
1 top cable entry,
contacts not nickel-plated,
IP 67



Amp.	125		
Poles	3	4	5
a	240	240	240
b	200	200	200
c	7	7	7
d	263	263	263
e	220	220	220
f	175	175	175
n	390	390	390
u	130	130	130
M1	50/20	50/20	50/20
M2	40	40	40


Wall mount appliance inlets,
internal fixing,
1 top cable entry M 50 and 1 x M 20,
2 bottom cable entries M 40,
3-pole: with terminal block set 3 x 50 mm²,
4-pole: with terminal block set 4 x 50 mm²,
5-pole: with terminal block set 5 x 50 mm²,
IP 67

OK = without terminal block set

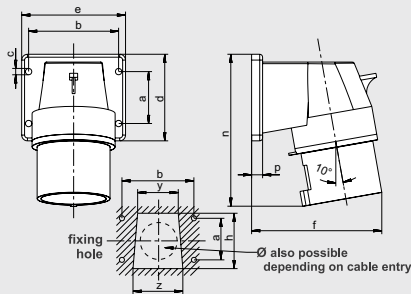

Amp.	16			32			63		
Poles	3	4	5	3	4	5	3	4	5
a	30	40	40	45	45	45	90	90	90
b	55	68	68	78	78	78	90	90	90
c	5,5	5,5	5,5	5,5	5,5	5,5	6,2	6,2	6,2
d	52	66	66	75	75	75	114	114	114
e	65	80	80	90	90	90	114	114	114
f	72	90	92	103	103	103	116	116	116
h	38	52	52	60	60	60	70	70	70
n	97	110	110	129	129	129	185	185	185
p	9,5	9,5	9,5	9,5	9,5	9,5	6	6	6
y	30	38	38	44	44	44	56	56	56
z	36	46	46	54	54	54	65	65	65

Panel mount appliance inlets,
angled, with screwed flange enclosure,
IP 44

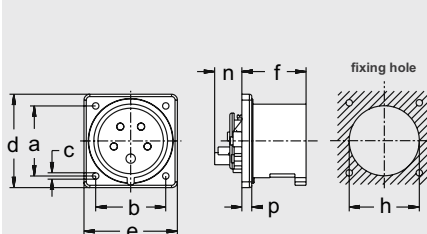

Amp.	16			32		
Poles	3	4	5	3	4	5
a	47	60	60	60	60	60
b	47	60	60	60	60	60
c	5,5	5,5	5,5	5,5	5,5	5,5
d	62	80	80	80	80	80
e	62	80	80	80	80	80
f	47	47	47	56	56	56
h	50	67	67	71	71	71
n	22	22	22	22	22	22
p	8,5	8,5	8,5	8,5	8,5	8,5

Art. 600 ... :

Amp.	16
Poles	3
a	60
b	60
c	5,5
d	75
e	75
f	47
h	50
n	22
p	8,5

Panel mount appliance inlets,
straight, screwed flange,
IP 44

- a retaining means
has to be fitted on the device -

*) the 3 x 16 A version is alternatively
available with 75 x 75 mm flange

Ampère	Poles	110 V 50 a. 60 Hz			230 V 50 a. 60 Hz			400 V 50 a. 60 Hz			500 V 50 a. 60 Hz			> 50 - 500 V 100 - 300 Hz			> 50 - 500 V over 300 - 500 Hz			
		3pole 4h	4pole 4h	5pole 4h	3pole 6h	4pole 9h	5pole 9h	3pole 9h	4pole 6h	5pole 6h	3pole 7h	4pole 7h	5pole 7h	3pole 10h	4pole 10h	5pole 10h	3pole 2h	4pole 2h	5pole 2h	



Part numbers																			
16	3	618 304			618 306			618 309			upper part without retaining means								
16	4	618 404			618 409			618 406			618 407			618 410			618 402		
16	5	618 504			618 509			618											
32	3	638 304			638 306			638 309											
32	4	638 404			638 409			638 406			638 407			638 410			638 402		
32	5	638 504			638 509			638											
63	3	668 304			668 306			668 309											
63	4	668 404			668 409			668 406			668 407			668 410			668 402		
63	5	668 504			668 509			668											
125	3	678 304			678 306			678 309											
125	4	678 404			678 409			678 406			678 407			678 410			678 402		
125	5	678 504			678 509			678											
125	3	678 304 OK			678 306 OK			678 309 OK											
125	4	678 404 OK			678 409 OK			678 406 OK			678 407 OK			678 410 OK			678 402 OK		
125	5	678 504 OK			678 509 OK			678 OK											
16	3	611 304			611 306			611 309											
16	4	611 404			611 409			611 406			611 407			611 410			611 402		
16	5	611 504			611 509			611											
32	3	631 304			631 306			631 309											
32	4	631 404			631 409			631 406			631 407			631 410			631 402		
32	5	631 504			631 509			631											
63	3	661 304			661 306			661 309											
63	4	661 404			661 409			661 406			661 407			661 410			661 402		
63	5	661 504			661 509			661											
16	3	600 304 *			600 306 *			600 309 *											
16	3	615 304			615 306			615 309											
16	4	615 404			615 409			615 406			615 407			615 410			615 402		
16	5	615 504			615 509			615											
32	3	635 304			635 306			635 309											
32	4	635 404			635 409			635 406			635 407			635 410			635 402		
32	5	635 504			635 509			635											

