

## Instruction Manual for 13A 2 Gang Socket

### Applicable Codes

- **Smooth:** SSL523-1
- **Square:** LG9096-1E, LG9098-1E
- **5M:** DSL151, DSL251, DSL351 DSL451, DSL551, DSL651, DSL951
- **7MPRO:** 7MPRO-151, 7MPRO-251, 7MPRO-351, 7MPRO-451, 7MPRO-551, 7MPRO-651

### General Information

These instructions contain important information regarding safety. They should be read carefully and should be retained for future reference. The company will not accept responsibility for any injury, damage or loss which may arise due to incorrect installation, operation or maintenance due to non-adherence to these instructions. This product must be installed in accordance with the latest edition of the IEE wiring regulations and building regulations. Read these instructions carefully before commencing installation. If in doubt, consult a qualified electrician.

### Instructions


- Before commencing work, isolate the mains power supply and remove the fuse in the fuse box or switch off the circuit breaker in the consumer unit.
- Pass cable through the entry holes / glands in mounting (back) box and connect as per the relevant diagram below. Check that the wires are adequately clamped in the socket by giving them a pull test.
- Should an Earth loop connection be required, use the earth terminal block in the back box. All Earth connections must be made and maintained.
- When installation is correctly completed, re-connect mains supply.

### Technical Information

- 2 gang 86mm x 146mm, 13A, 230V

### Wiring Diagram

2 gang

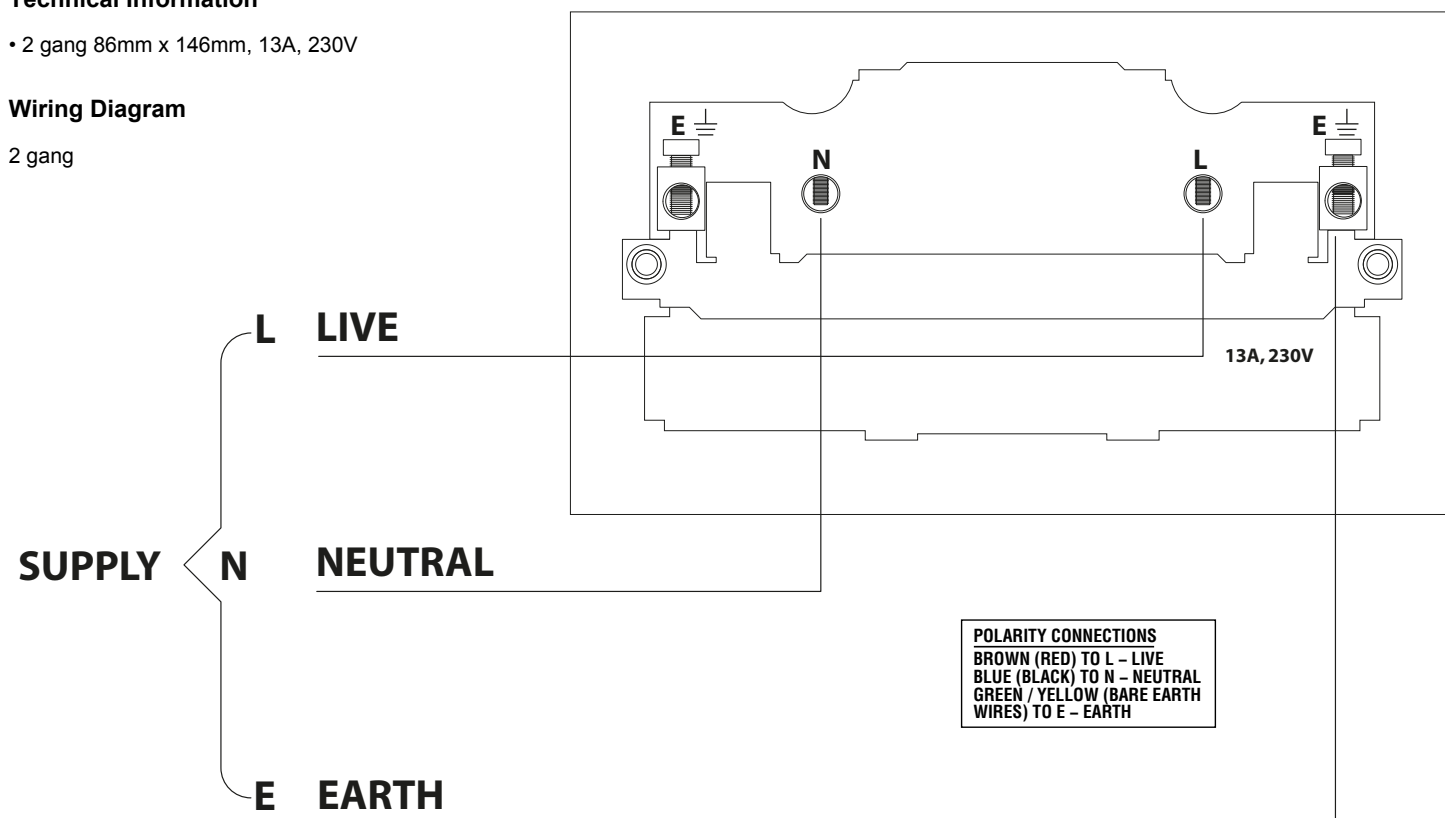

- |                      |  |
|----------------------|--|
| <b>Safety -</b>      | Suitable only for indoor installations Before starting any electrical work always switch off at the mains. If in any doubt consult a qualified electrician Ensure that the earth is connected otherwise it will be unsafe. Wire / Wiring colours in accordance with IEE Wiring Regulations |
| <b>Important -</b>   | Please ensure to use the gasket supplied when installing this product. The gasket fits between the product & the wall & it prevents the possibility of discolouration of the metal face plate due to moisture in your wall after fresh wallpaper / plastering                              |
| <b>Maintenance -</b> | To help maintain the original finish of this product, wipe a soft cloth over the face plate periodically   |