

CHROMA Constant Current LED Tape



Key Features:

- Constant current design to ensure even colour distribution over longer lengths
- 24Vdc input voltage
- Maximum powered from one end 20M
- 60 LEDs per mtr
- Multiple applications for commercial and residential environments
- Compatible with DALI/DMX/0-10V/Mains and all other dimming drivers

CHROMA IP20 CONSTANT CURRENT SPECIFICATION


Part Code	B5-11-28-2-60-F10-CC-20-20M	C0-11-28-2-60-F10-CC-20-20M	D0-11-28-2-60-F10-CC-20-20M	F1-11-28-2-60-F10-CC-20-20M
Voltage	24VDC	24VDC	24VDC	24VDC
Power Consumption	4.32W/M	4.32W/M	4.32W/M	4.32W/M
LED Qty	60 per mtr	60 per mtr	60 per mtr	60 per mtr
Cuttable	Every 100mm	Every 100mm	Every 100mm	Every 100mm
Colour	2500K	3000K	4000K	6100K
PCB Width	10mm	10mm	10mm	10mm
Luminous Flux	450lm/M	450lm/M	510lm/M	510lm/M
CRI	80Ra	80Ra	80Ra	80Ra
IP Rating	IP20	IP20	IP20	IP20
Working Temperature	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C
Working Humidity	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH
Dimensions	20,000 x 10 x 1.2mm	20,000 x 10 x 1.2mm	20,000 x 10 x 1.2mm	20,000 x 10 x 1.2mm

CHROMA IP65 CONSTANT CURRENT SPECIFICATION

Part Code	B5-11-28-2-60-F10-CC-65-20M	C0-11-28-2-60-F10-CC-65-20M	D0-11-28-2-60-F10-CC-65-20M	F1-11-28-2-60-F10-CC-65-20M
Voltage	24VDC	24VDC	24VDC	24VDC
Power Consumption	4.32W/M	4.32W/M	4.32W/M	4.32W/M
LED Qty	60 per mtr	60 per mtr	60 per mtr	60 per mtr
Cuttable	Every 100mm	Every 100mm	Every 100mm	Every 100mm
Colour	2500K	3000K	4000K	6100K
PCB Width	10mm	10mm	10mm	10mm
Luminous Flux	450lm/M	450lm/M	510lm/M	510lm/M
CRI	80Ra	80Ra	80Ra	80Ra
IP Rating	IP65	IP65	IP65	IP65
Working Temperature	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C	-20°C ~ +45°C
Working Humidity	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH	40% ~ 70% RH
Dimensions	20,000 x 10 x 1.8mm	20,000 x 10 x 1.8mm	20,000 x 10m x 1.8mm	20,000 x 10 x 1.8mm



Mechanical

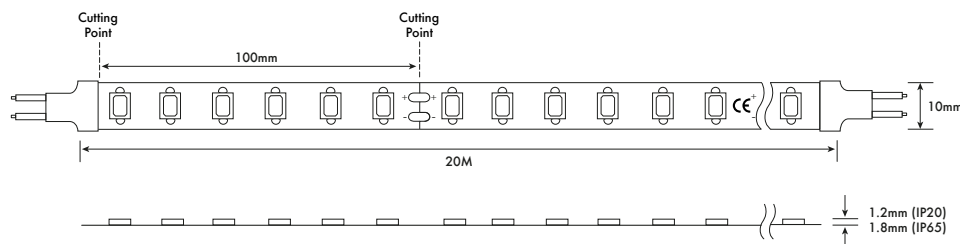

PowerLed (UK) Ltd
Orion House
Calleva Park
Aldermaston
Berkshire
RG7 8SN

Contact:
Tel: 0118 9703856
enquiries@powerled.uk.com
www.powerled.uk.com

