
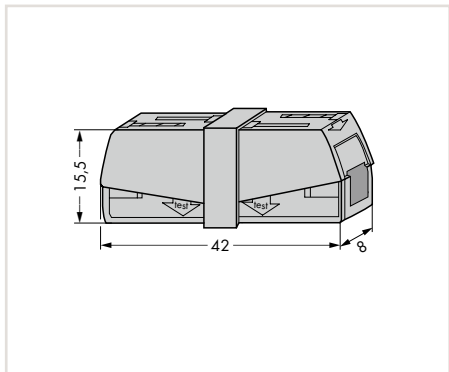
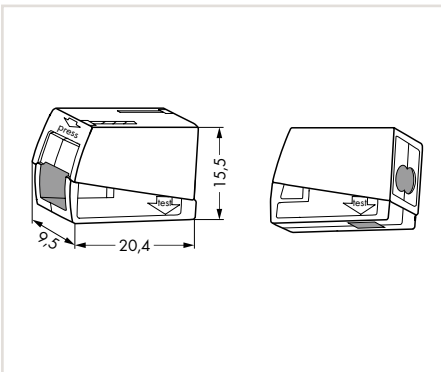


Installation side 1 ... 2.5 mm² "s" Lighting side 0.5 ... 2.5 mm² "s+f-st" 400 V/4 kV/2; 24 A  9 ... 11 mm / 0.35 ... 0.43 inch	Installation side 1 ... 2.5 mm² "s" Lighting side 0.5 ... 2.5 mm² "s+f-st" 400 V/4 kV/2; 24 A  9 ... 11 mm / 0.35 ... 0.43 inch	0.5 ... 2.5 mm² "s+f-st" 400 V/4 kV/2 I_N 24 A  9 ... 11 mm / 0.35 ... 0.43 inch	20 ... 16 AWG 300 V, 20 A[®]
--	--	--	---

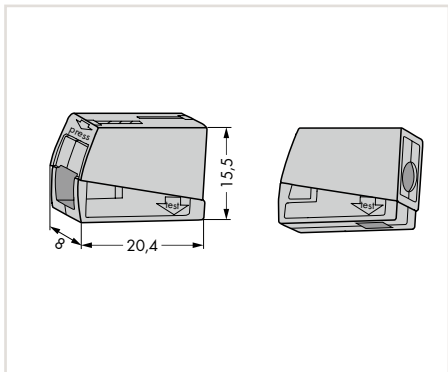

Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit	Color	Item No.	Pack. Unit
Lighting connector, standard version, continuous service temperature (max.) 105 °C, ambient operating temperature (max.) 60 °C			2-conductor lighting connector, standard version, continuous service temperature (max.) 105 °C, ambient operating temperature (max.) 60 °C			"Service" connector		
● gray	224-101	1000 (10x100)	○ white	224-112	1000 (10x100)	● gray	224-201	50
Lighting connector, version for increased continuous service temperature of 120°C, ambient operating temperature (max.) 75 °C			2-conductor lighting connector, version for increased continuous service temperature of 120°C, ambient operating temperature (max.) 75 °C					
● black	224-104	100	● black	224-114	100			

[illegible]

Dimensions in mm